

Expires in six months

April 2002

**SS7 MTP2-User Peer-to-Peer Adaptation Layer  
Test Specifications  
M2PA-TEST  
<draft-bidulock-sigtran-m2pa-test-01.ps>**

### Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of Section 10 or RFC 2026. Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as 'work in progress'.

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

To learn the current status of any Internet-Draft, please check the Directories on [ftp.is.co.za](ftp://ftp.is.co.za) (Africa), [ftp.nordu.net](ftp://ftp.nordu.net) (Europe), [ftp.munnari.oz.au](ftp://ftp.munnari.oz.au) (Pacific Rim), [ftp.ietf.org](ftp://ftp.ietf.org) (US East Coast), or [ftp.isi.edu](ftp://ftp.isi.edu) (US West Coast).

### Abstract

This Internet Draft provides information for the Internet community on test cases for testing the SS7 M2P2-User Peer-to-Peer Adaptation Layer<sup>M2PA</sup> based on the conformance test specifications for SS7 MTP Level 2Q.<sup>781</sup>

### 1. Introduction

This draft provides a set of detailed test of the SS7 MTP2-User Peer-to-Peer Adaptation Layer<sup>M2PA</sup> based on the test specifications for SS7 MTP Level 2Q.<sup>781</sup>. These tests are intended to validate the SS7 MTP2-User Peer-to-Peer Adaptation Layer (M2PA) protocol<sup>M2PA</sup>.

These tests attempt to completely validate the M2PA protocol without redundancy. Each test is described as simply as possible to check precisely the elementary function of the protocol. The tests are listed in no specific order.

#### 1.1. Change History



##### 1.1.1. Changes from draft-bidulock-sigtran-m2pa-test-00

- (1) M2PA Draft Revision 4<sup>M2PA</sup> no longer contains a special proving message. Status PROVING-NORMAL or PROVING-EMERGENCY messages are padded and sent repeatedly to accomplish proving during the proving period. The occurrence of PROVING messages has been removed from the test cases to update this draft to match the M2PA draft revision 4<sup>M2PA</sup>.
- (2) M2PA Draft Revision 4<sup>M2PA</sup> contains both forward and backward sequence numbers (FSN, BSN). The test cases were updated to include the sequence numbers (where other than zero) and test cases were added for abnormal backwards sequence numbers.
- (3) M2PA Draft Revision 4<sup>M2PA</sup> has no formal method for acknowledging the receipt of a DATA message when there are no other messages to send (DATA or STATUS). The Status of "In Service", for which no other use has been specified in the current draft<sup>M2PA</sup>, is used as such an explicit acknowledgement. Another possibility would have been to send a DATA message with no data in it. The old "ACK" message is now labelled "IN-SERVICE".
- (4) The status message previously labelled "IN-SERVICE" has been relabelled "READY" to better reflect the name of that status message in the draft and to not conflict with the new<sup>M2PA</sup> "IN-SERVICE" status message.

## 2. Test Environment

### 2.1. Test Configurations

A single M2PA link is used in the tests. *Figure 2.1-1* and *Figure 2.1-2* show a single link between IUT and PT. In *Test Configuration 1* as shown in *Figure 2.1-1*, PT initiates the association. In *Test Configuration 2* as shown in *Figure 2.1-2*, IUT initiates the association. Test specifications in both configurations are written to test the M2PA at IUT .

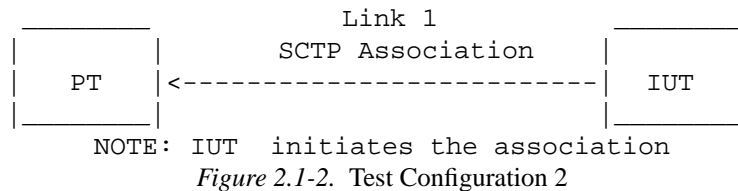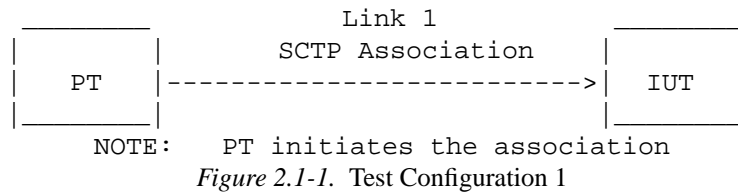

## 2.2. Recommended IUT Settings

### 2.2.1. Timer Values

It is recommended that the following timer values be configured at the IUT for the purposes of performing these validation tests:

T1	45 seconds
T2	5 seconds
T2l	20 seconds (not applicable)
T2h	100 seconds (not applicable)
T3	1 second
T4n	8 seconds
T4e	0.5 seconds
T5	0.1 seconds (not applicable)
T6	4 seconds
T7	1 second
T8	0.1 seconds (not applicable)

### 2.2.2. Buffer Threshold Values

It is recommended that the following buffer threshold values be configured at the IUT for the purpose of performing these validation tests:

N1	???
N2	127 messages

## 3. Tests

### 3.1. Link State Control - Expected signal units/orders


#### 3.1.1. Initialization (Power-up)

These tests check that the IUT enters the correct state upon establishment of the SCTP association. Establishing the association at both peers is the equivalent to the Q.703 "Power On". The correct behavior is for both M2PA peers to send a status "Out of Service" and enter the "Out of Service" state. These test are useful both for Validation and Compatibility testing.

**3.1.1.1. Forward Direction**

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.1-1*.

Reference: Q.781/Test 1.1(a)

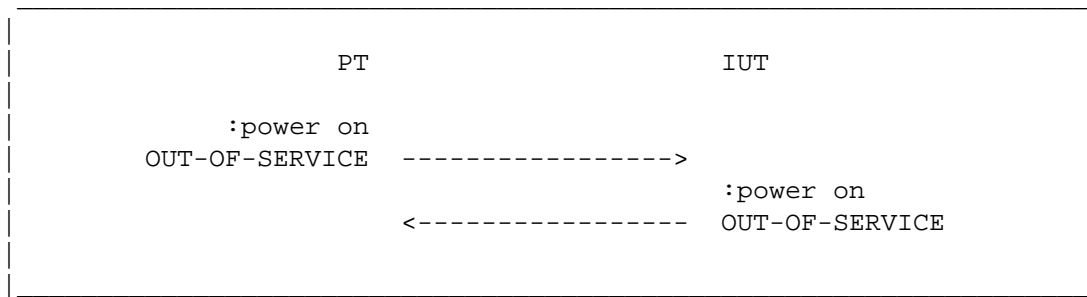

*Figure 3.1.1-1. Initialization (Power-up)*


Test Description:

- (1) The test begins with both the PT and the IUT in the "Power Off" state.
- (2) The "Power On" command is issued at the PT and then the IUT.
- (3) Check that the IUT sends a status "Out of Service" message enters and remains in the "Out of Service" state.
- (4) Repeat the test in the opposite direction as shown below.

**3.1.1.2. Reverse Direction**

This is the test repeated in the opposite direction. The expected sequence of events is illustrated *Figure 3.1.1-2*.

Reference: Q.781/Test 1.1(b)

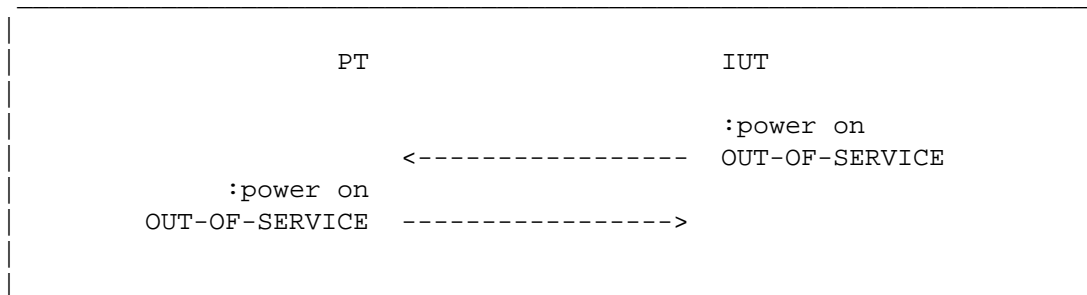

*Figure 3.1.1-2. Initialization (Power-up)*

Test Description:

- (1) The test begins with both the PT and the IUT in the "Power Off" state.
- (2) The "Power On" command is issued at the IUT and then the PT.
- (3) Check that the IUT sends a status "Out of Service" message enters and remains in the "Out of Service" state.

**3.1.2. Timer T2**

This test validates the T2 (Not Aligned) timer and procedure at the IUT. This is the duration of time that the M2PA peer will wait to receive a status "Alignment" message after sending a status "Alignment" message.

Reference: Q.781/Test 1.2

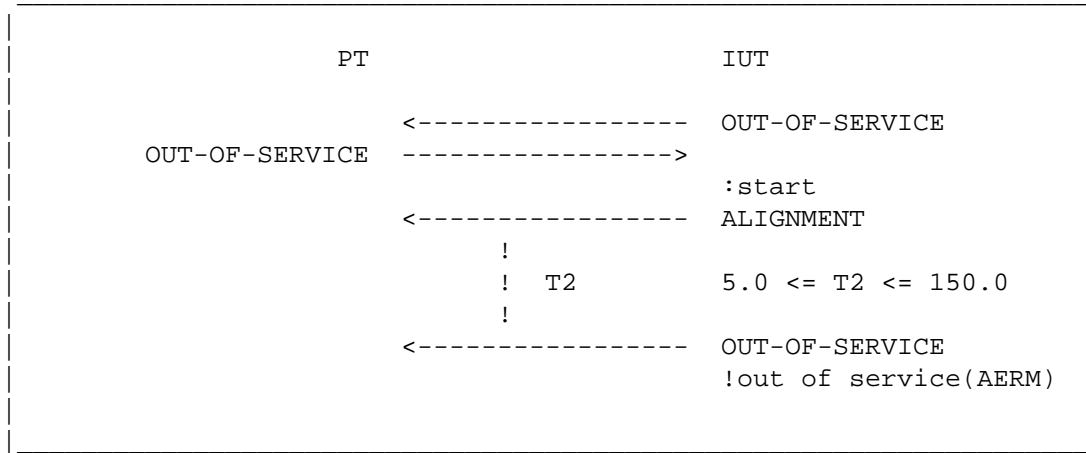


Figure 3.1.2-1. Timer T2

Test Description:

- (1) The test begins with both the PT and the IUT in the "Out of Service" state.
- (2) The "Start" command is issued at the IUT.
- (3) Check that the IUT sends a status "Alignment" message.
- (4) Check that the IUT sends a status "Out of Service" and issues an "Out of Service" indication to Level 3 with reason "Alignment Not Possible".
- (5) Check that T2 is between 5.0 seconds and 150.0 seconds in duration.
- (6) The IUT should stay in the "Out of Service" state.

### 3.1.3. Timer T3

This test validates the T3 (Aligned) timer and procedure at the IUT. This is the duration of time that the M2PA peer will wait to receive a status "Proving Normal" or status "Proving Emergency" message from the M2PA peer after sending status "Proving Normal" or status "Proving Emergency". The expected sequence of events is illustrated *Figure 3.1.3-1*.

Reference: Q.781/Test 1.3

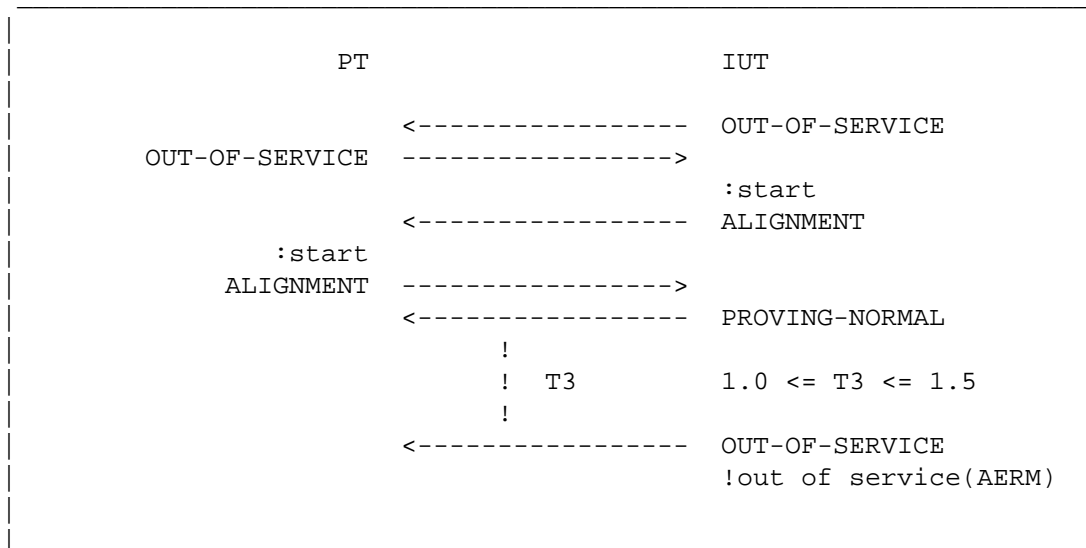


Figure 3.1.3-1. Timer T3

Test Description:


- (1) The test begins with both the PT and the IUT in the "Out of Service" state.

- (2) The Level 3 "Start" command is issued at the IUT.
- (3) Check that the IUT sends a status "Alignment" message.
- (4) Send a status "Alignment" message to the IUT.
- (5) Check that the IUT response with a status "Proving Normal" message.
- (6) Check that the link goes out of service for reason "Alignment Not Possible".
- (7) Check that T3 is between 1.0 seconds and 1.5 seconds in duration.

**3.1.4. Timer T1 & Timer T4 (Normal)**

This test validates the T4(Normal) (Proving) and T1 (Aligned Ready) timers and procedures at the IUT. T4 is the duration of time that the M2PA peer will wait to complete proving. T1 is the duration that the M2PA peer will wait to receive a status "Ready" or a status "Processor Outage" message from the M2PA peer after sending a status "Ready" or status "Processor Outage" message. The expected sequence of events is illustrated *Figure 3.1.4-1*.

Reference: Q.781/Test 1.4

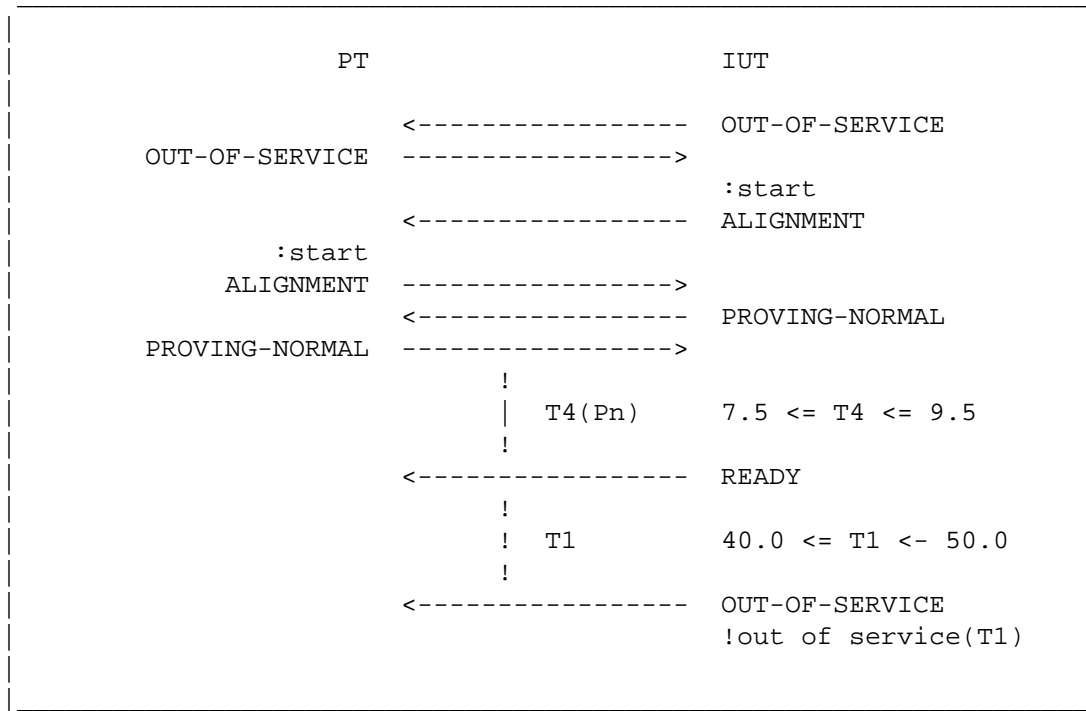

*Figure 3.1.4-1. Timer T1 & Timer T4 (Normal)*

Test Description:

- (1) The test begins with both the PT and the IUT in the "Out of Service" state.
- (2) The Level 3 "Start" command is issued at the IUT.
- (3) Check that the IUT sends a status "Alignment" message.
- (4) Send a status "Alignment" message to the IUT and exchange status "Proving Normal" and proving data messages.
- (5) Check that a status "Ready" message is received from the IUT within time T4.
- (6) Check that T4 is between 7.5 seconds and 9.5 seconds in duration.
- (7) Check that a status "Out of Service" message is received from the IUT within time T1 and that an "Out of Service" indication is given to Level 3 at the IUT with reason "T1 Timeout".
- (8) Check that T1 is between 40.0 seconds and 50.0 seconds in duration.


**3.1.5. Normal alignment procedure**

This test case validates the normal alignment procedure at the IUT. This is a normal successful alignment procedure which results in the link going to and staying in the "Ready" state.

**3.1.5.1. Forward Direction**

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.5-1*.

Reference: Q.781/Test 1.5(a)

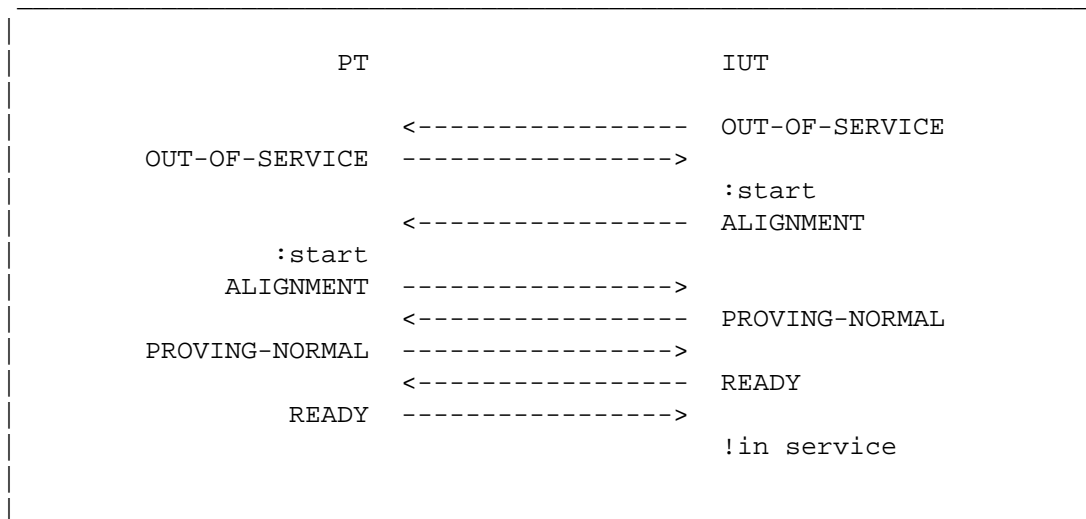

*Figure 3.1.5-1. Normal alignment procedure*


Test Description:

- (1) The test begins with the link "Out of Service".
- (2) The Level 3 "Start" command is issued at the IUT and the PT.
- (3) Check that the IUT sends the message sequence illustrated in *Figure 3.1.5-1*.
- (4) Check that the IUT sends a status "Ready" message and indicates "In Service" to Level 3.
- (5) Check that the link maintains the "In Service" state.

**3.1.5.2. Reverse Direction**

The equivalent Q.781 test case is normally repeated with with 2-byte LSSUs instead of 1-byte LSSUs when testing Q.703 links. The effect of sending 2-byte LSSUs is simulated by adding a "filler" to the statu message. The expected sequence of events is illustrated *Figure 3.1.5-2*.

Reference: Q.781/Test 1.5(b)

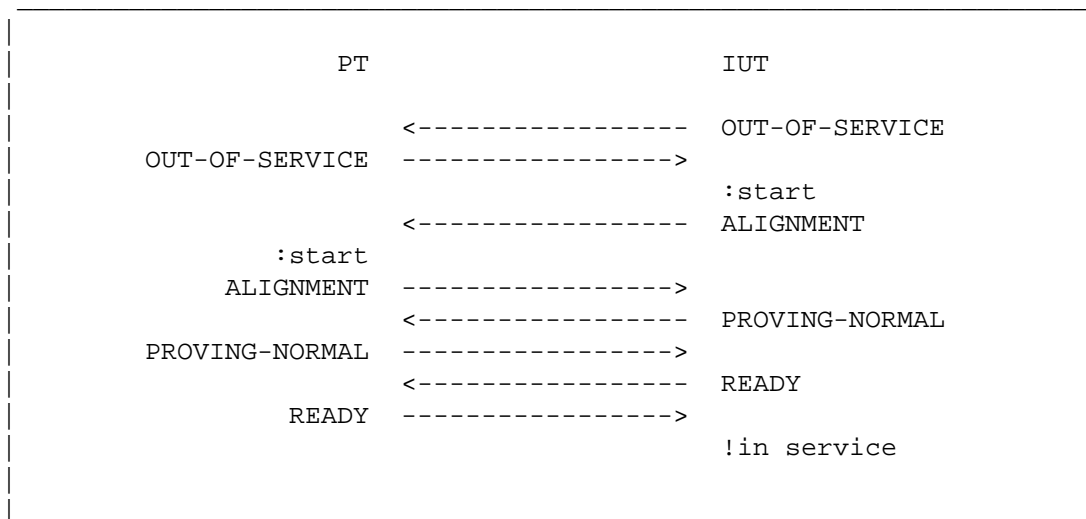

*Figure 3.1.5-2. Normal alignment procedure*


Test Description:

- (1) The test begins with the link "Out of Service".
- (2) The Level 3 "Start" command is issued at the IUT and the PT.
- (3) Check that the IUT sends the message sequence illustrated in *Figure 3.1.5-2*.
- (4) Check that the IUT sends a status "Ready" message and indicates "In Service" to Level 3.
- (5) Check that the link maintains the "In Service" state.

**3.1.6. Normal alignment procedure - correct procedure (Data)**

The test case validates the normal alignment procedure at the IUT when a DATA message is used instead of a status "Ready" to complete the alignment procedure. The expected sequence of events is illustrated *Figure 3.1.6-1*.

Reference: Q.781/Test 1.6

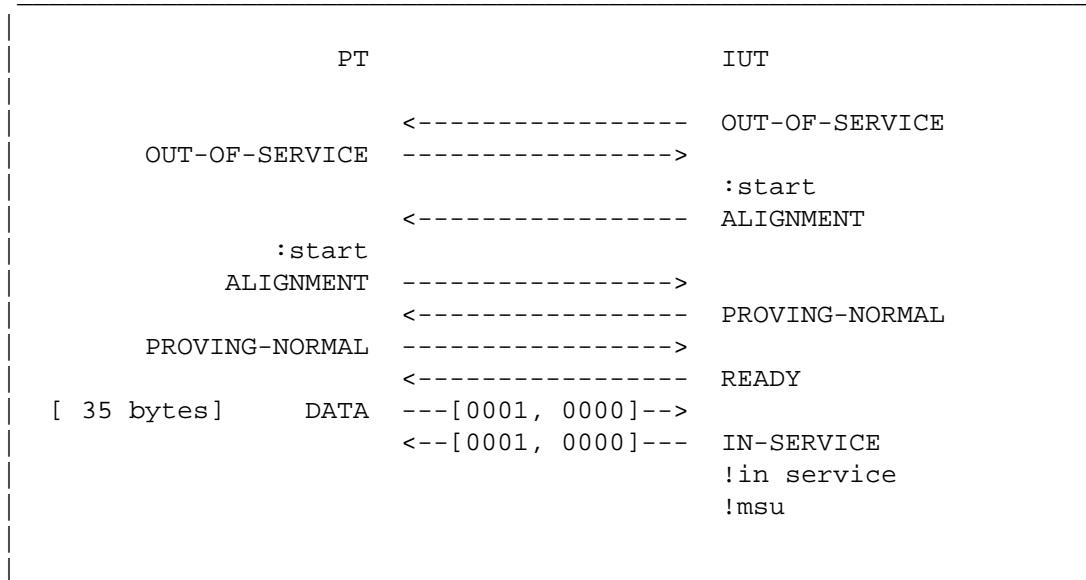

*Figure 3.1.6-1. Normal alignment procedure (Data)*

Test Description:

- (1) The test begins with the link "Out of Service".
- (2) The Level 3 "Start" command is issued at the IUT and the PT.
- (3) Check that the IUT sends the message sequence illustrated in *Figure 3.1.6-1*.
- (4) Check that the IUT sends a status "Ready" message and indicates "In Service" to Level 3.
- (5) Check that the IUT acknowledges the Data message with a status "In Service" message.
- (6) The IUT should maintain the "In Service" state.

**3.1.7. Status "Alignment" received during normal proving period**

This test case validates that the IUT restarts the alignment and proving procedure when receiving a status "Alignment" message in the "Proving" state. The expected sequence of events is illustrated *Figure 3.1.7-1*.

Reference: Q.781/Test 1.7

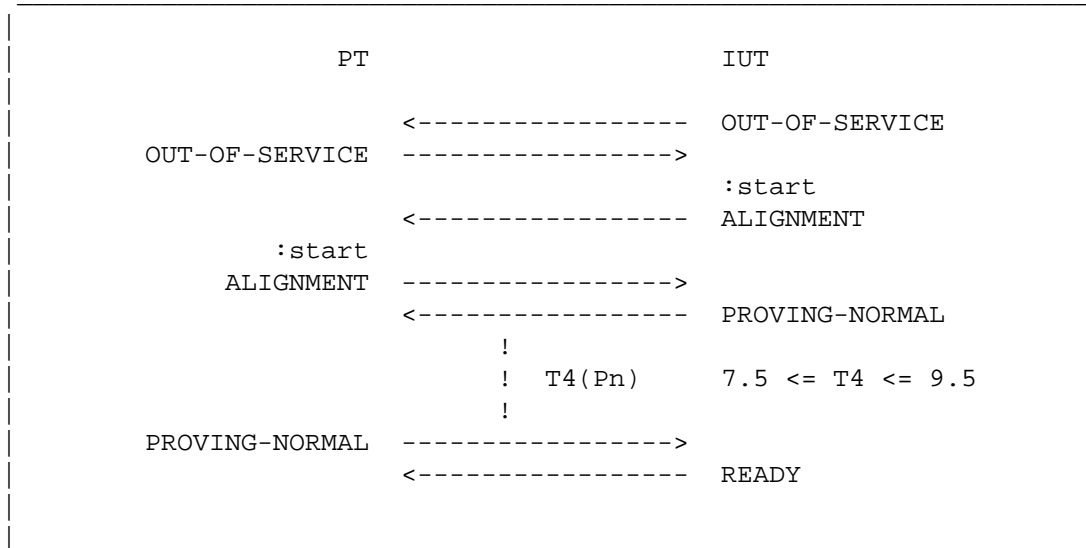


Figure 3.1.7-1. "Alignment" during normal proving

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and the PT.
- (3) When normal proving begins, wait for half the duration of T4 and then send the IUT a status "Alignment" message.
- (4) Check that the IUT restarts the proving period and sends a status "Ready" message T4 after the last status "Alignment" message was sent to the IUT.
- (5) Check that T4(Pn) is between 7.5 seconds and 9.5 seconds in duration.

### 3.1.8. Normal alignment with PO set

This case tests the normal alignment procedure where one M2PA peer is experiencing a local processor outage before and during alignment. The M2PA peers should still align and the link should go into service at Level 3.

#### 3.1.8.1. Forward Direction

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.8-1*.

Reference: Q.781/Test 1.8(a)

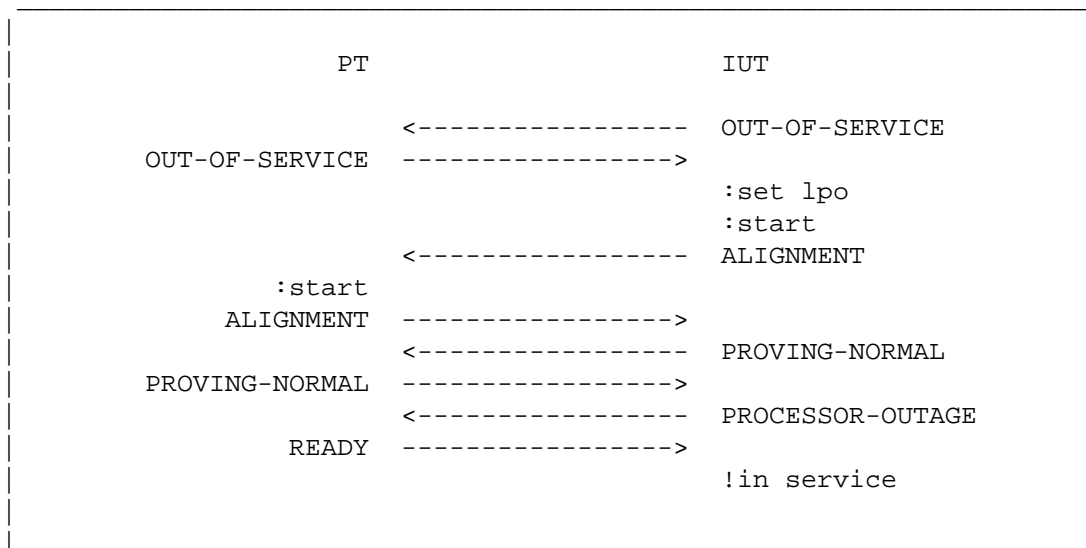


Figure 3.1.8-1. Normal alignment with PO set




Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and the "Start" command at the PT.
- (3) Check that the IUT sends the message sequence illustrated in *Figure 3.1.8-1*.
- (4) Check that the IUT sends status "Processor Outage" message and indicates "In Service" to Level 3.
- (5) Check that the link maintains the "In Service" state at the IUT.

**3.1.8.2. Reverse Direction**

This case is the same test in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.8-2*.

Reference: Q.781/Test 1.8(b)

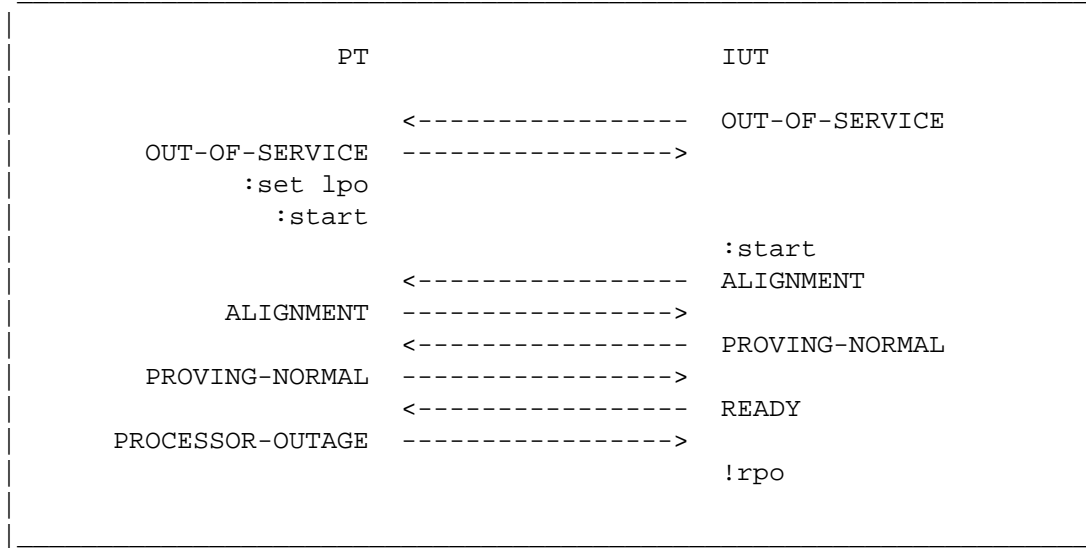

*Figure 3.1.8-2. Normal alignment with PO set*

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Local Processor Outage" and "Start" command at the PT and the "Start" command at the IUT.
- (3) Check that the IUT sends the message sequence illustrated in *Figure 3.1.8-2*.
- (4) Check that the IUT sends status "Ready" message and indicates "Remote Processor Outage" indication to Level 3.
- (5) Check that the link maintains the "In Service" state at the IUT.

**3.1.9. Normal alignment with PO set (Data)**

This test case validates the normal alignment procedure at the IUT in the "Processor Outage" state when a Data message is used instead of an "Ready" message to complete the alignment procedure.

**3.1.9.1. Forward Direction**

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.9-1*.

Reference: Q.781/Test 1.9(a)

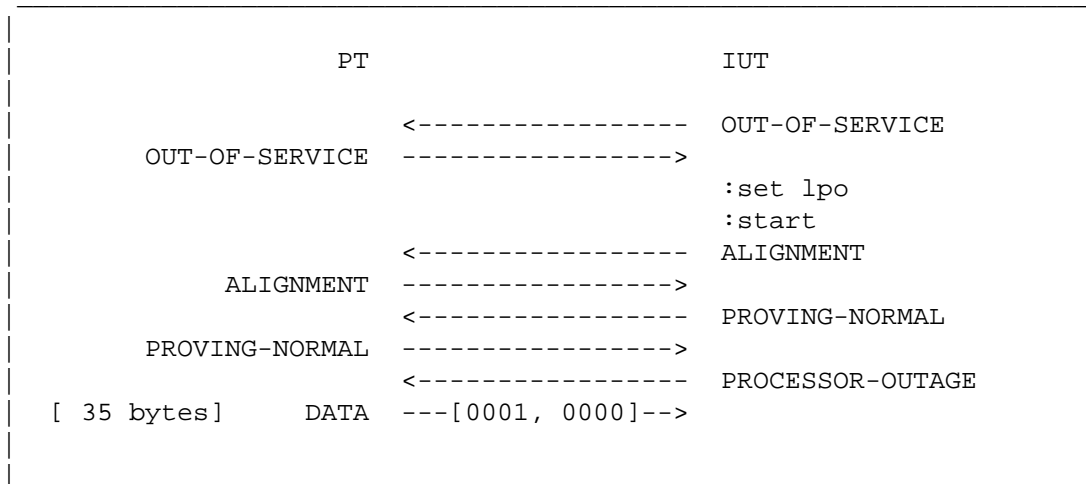


Figure 3.1.9-1. Normal alignment with PO set (Data)

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT.
- (3) Check that the IUT sends the message sequence illustrated in *Figure 3.1.9-1*.
- (4) Check that the IUT sends status "Processor Outage" message and send a Data message to the IUT to complete the alignment procedure.
- (5) Check that the IUT does not acknowledge the Data message.
- (6) Check that the IUT maintains the "Processor Outage" state.

### 3.1.9.2. Reverse Direction

This is the same test in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.9-2*.

Reference: Q.781/Test 1.9(b)

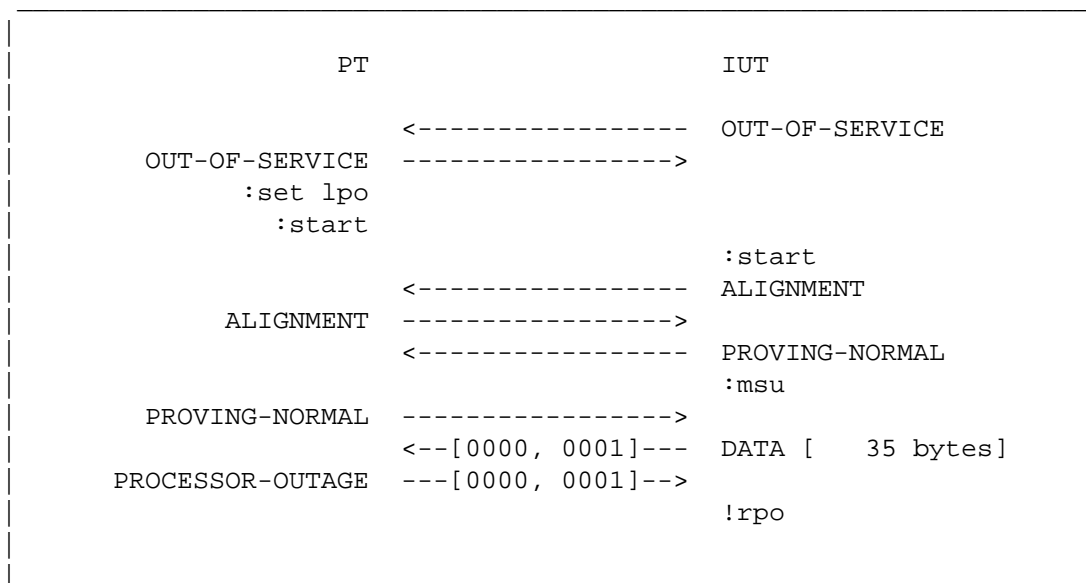


Figure 3.1.9-2. Normal alignment with PO set (Data)

Test Description:


- (1) The test begins with the link in the "Out of Service" state.

- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the PT and the "Start" command at the IUT.
- (3) Provide an MSU for transmission at the IUT before the proving period ends.
- (4) Check that the IUT sends the message sequence illustrated in *Figure 3.1.9-2*.
- (5) Check that the IUT completes the proving process with the MSU and indicates "Remote Processor Outage" to Level 3.
- (6) Check that the IUT maintains the "Processor Outage" state and does not require acknowledgment of the Data message used to complete alignment.

**3.1.10. Normal alignment with PO set and cleared**

This case tests that if the local processor outage condition is set and cleared before the alignment procedure starts that normal alignment is performed and no status "Processor Outage" message is sent to the M2PA peer. The expected sequence of events is illustrated *Figure 3.1.10-1*.

Reference: Q.781/Test 1.10

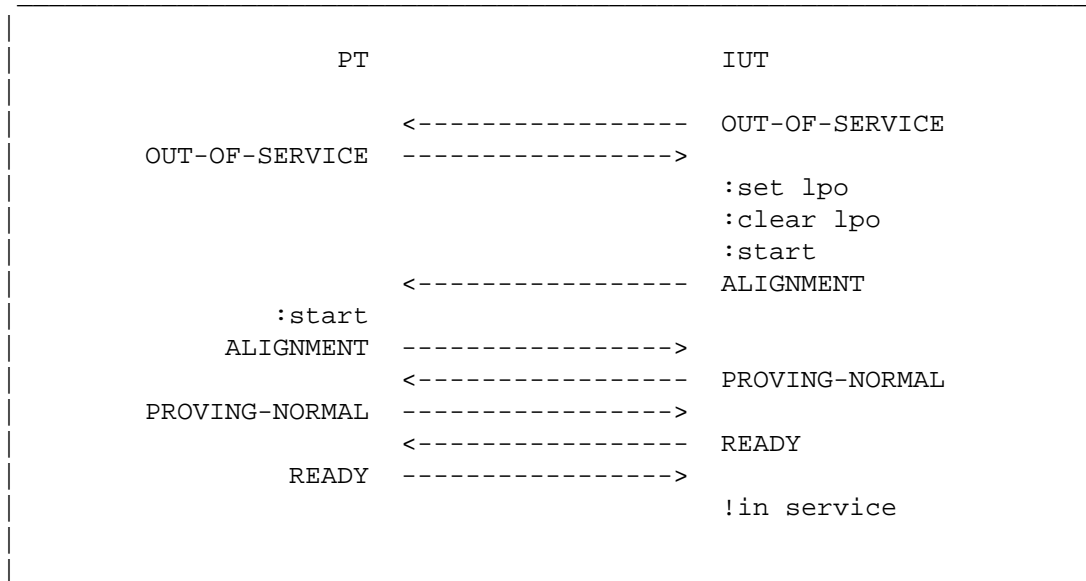

*Figure 3.1.10-1. Normal alignment with PO set and cleared*

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage," "Clear Local Processor Outage" and "Start" commands at the IUT and "Start" command at the PT.
- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.10-1*.
- (4) Check that the IUT completes the alignment procedure and sends the status "Ready" message and indicates "In Service" to Level 3.

**3.1.11. Set RPO when "Aligned not ready"**

This test case validates the behavior of the IUT when processor outage condition is set at both the PT and the IUT. The expected sequence of events is illustrated *Figure 3.1.11-1*.

Reference: Q.781/Test 1.11

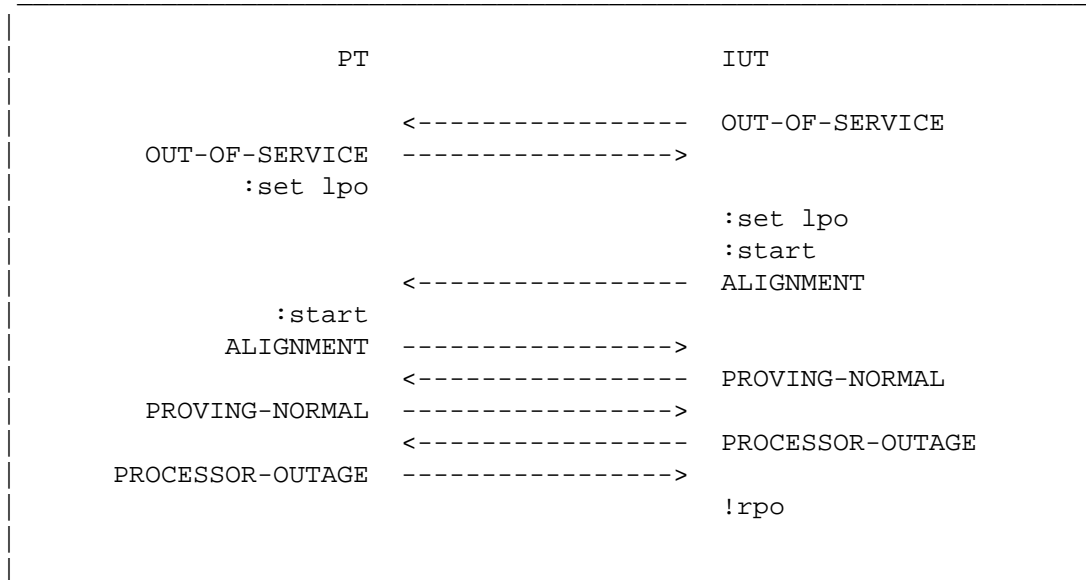


Figure 3.1.11-1. Set RPO when "Aligned Not Ready"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and PT.
- (3) Check that the alignment procedure follows the sequence of events illustrated in *Figure 3.1.11-1*.
- (4) Check that the IUT sends status "Processor Outage" and indicates "Remote Processor Outage" to Level 3.

**3.1.12. Status "Out of Service" received when "Aligned not ready"**

These test cases validate the behavior of the IUT when it receives a status "Out of Service" message in the "Aligned Not Ready" state or sends a Status "Out of Service" message when the M2PA peer is in the "Aligned Not Ready" state.

**3.1.12.1. Forward Direction**

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.12-1*.

Reference: Q.781/Test 1.12(a)

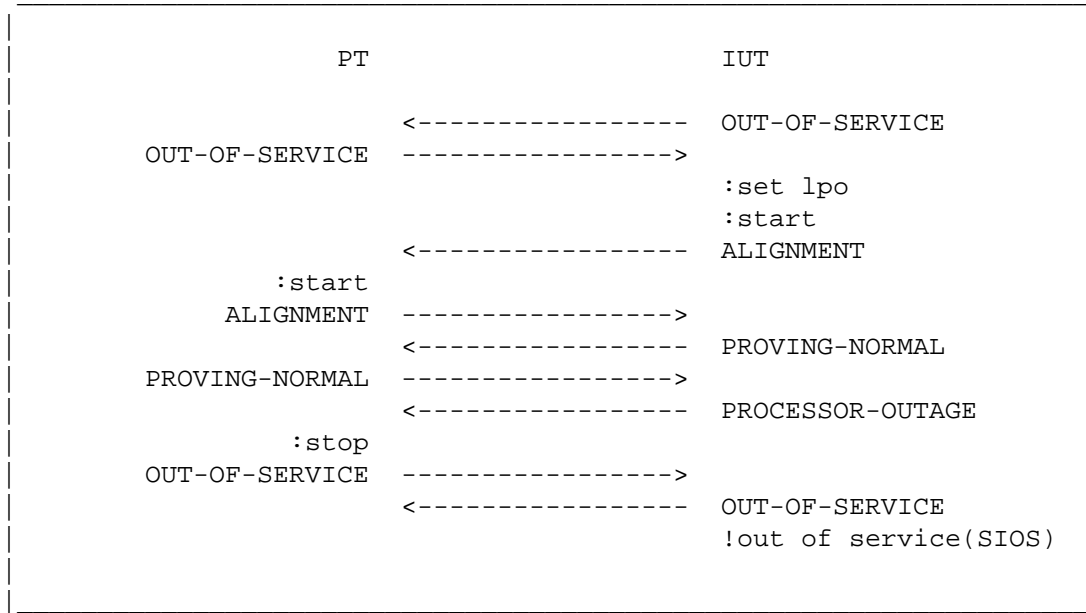


Figure 3.1.12-1. "Out of Service" when "Aligned not ready"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and the "Start" command at the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.1.12-1*.
- (4) Check that the IUT sends a status "Processor Outage" message when it completes the initial alignment procedure and issue a Level 3 "Stop" command at the PT.
- (5) Check that the IUT sends status "Out of Service" and indicates "Out of Service" to Level 3 with the reason "Received SIOS".

**3.1.12.2. Reverse Direction**

The test is repeated in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.12-2*.

Reference: Q.781/Test 1.12(b)

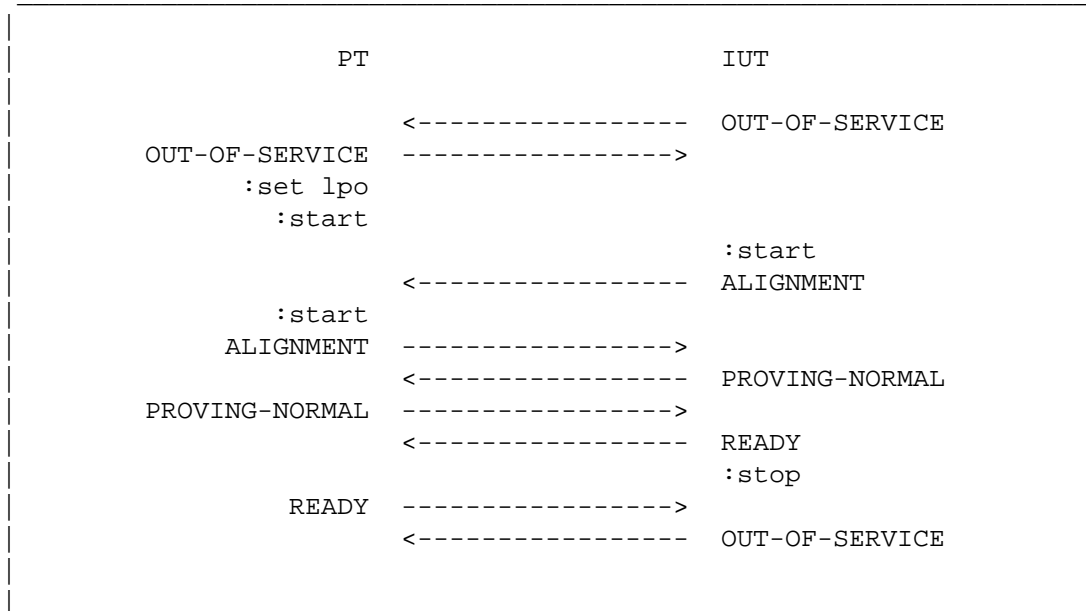


Figure 3.1.12-2. "Out of Service" when "Aligned not ready"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and the PT.
- (3) Check that the sequence of events follows those illustrated in *Figure 3.1.12-2*.
- (4) When the IUT goes to the "In Service" state, issue the Level 3 "Stop" command at the IUT.
- (5) Check that the IUT sends the status "Out of Service" message.

**3.1.13. Status "Alignment" received when "Aligned not ready"**

This test case validates the behavior of the IUT when it receives a status "Alignment" message in the "Aligned Not Ready" state. The expected sequence of events is illustrated *Figure 3.1.13-1*.

Reference: Q.781/Test 1.13

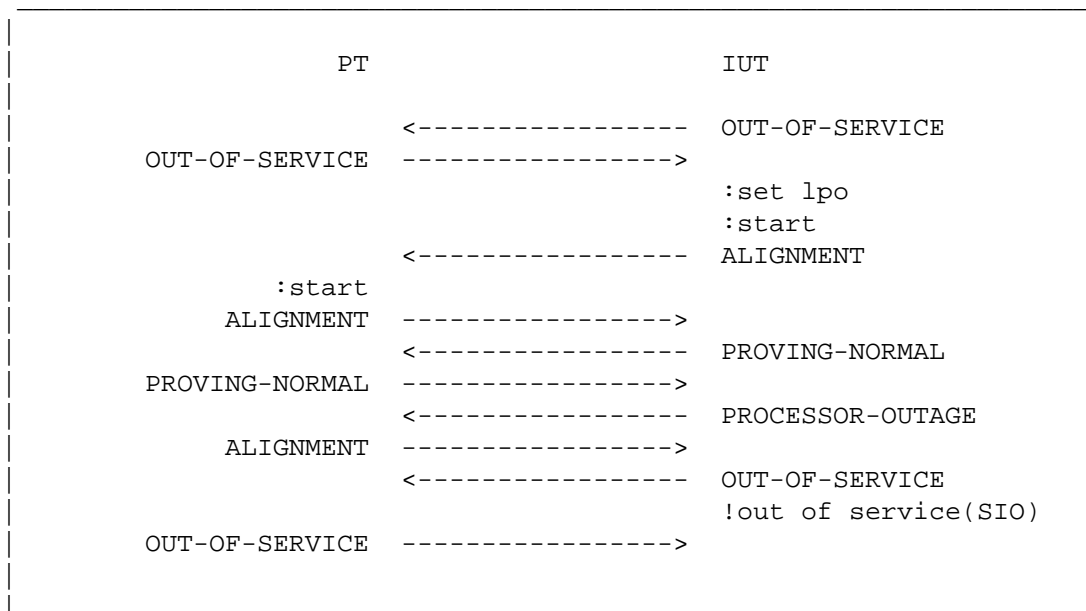


Figure 3.1.13-1. "Alignment" when "Aligned not ready"


Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and "Start" command at the PT.
- (3) Check that the sequence of events follows the normal alignment procedure illustrated in *Figure 3.1.13-1*.
- (4) When the IUT sends the status "Processor Outage" message, send a status "Alignment" message to the IUT.
- (5) Check that the IUT sends the status "Out of Service" message and indicates "Out of Service" to Level 3 with reason "Received SIO".

**3.1.14. Set and clear LPO when "Initial alignment"**

This test case validates the behavior of the IUT when it receives Level 3 "Set Local Processor Outage" and "Clear Local Processor Outage" commands in the "Initial Alignment" state. The expected sequence of events is illustrated *Figure 3.1.14-1*.

Reference: Q.781/Test 1.14

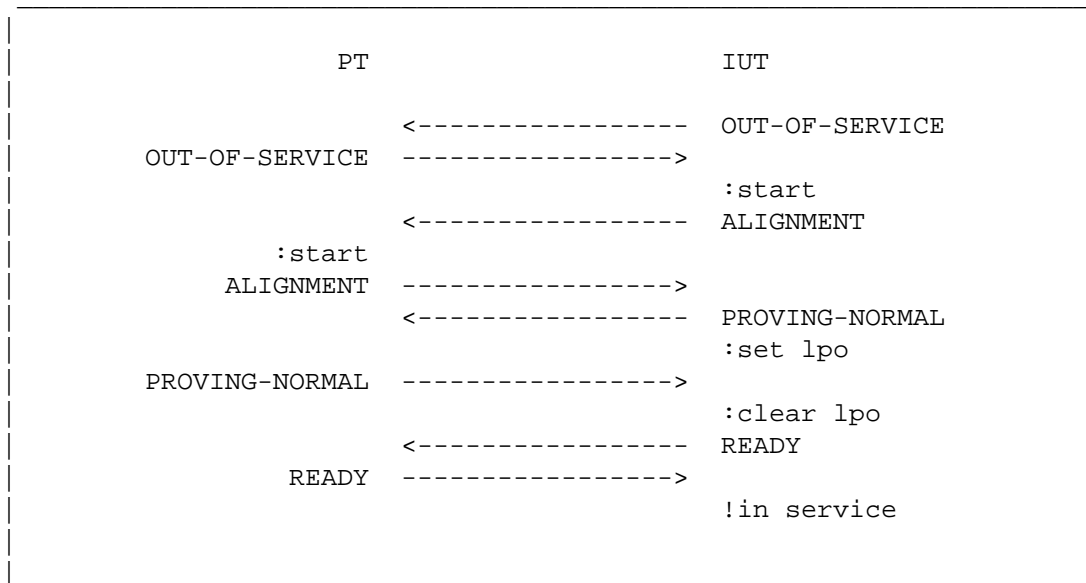

*Figure 3.1.14-1. Set and clear LPO when "Initial Alignment"*

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and PT.
- (3) Issue the Level 3 "Set Local Processor Outage" command at the IUT when the IUT begins initial alignment.
- (4) Issue the Level 3 "Clear Local Processor Outage" command at the IUT before the IUT completes initial alignment.
- (5) Check that the IUT sends the status "Ready" message when it completes initial alignment and that the "In Service" indication is given to Level 3 at the IUT.

**3.1.15. Set and clear LPO when "Aligned ready"**

This test case validates the behavior of the IUT when it receives the Level 3 "Set Local Processor Outage" and "Clear Local Processor Outage" commands in the "Aligned Ready" state. The expected sequence of events is illustrated *Figure 3.1.15-1*.

Reference: Q.781/Test 1.15

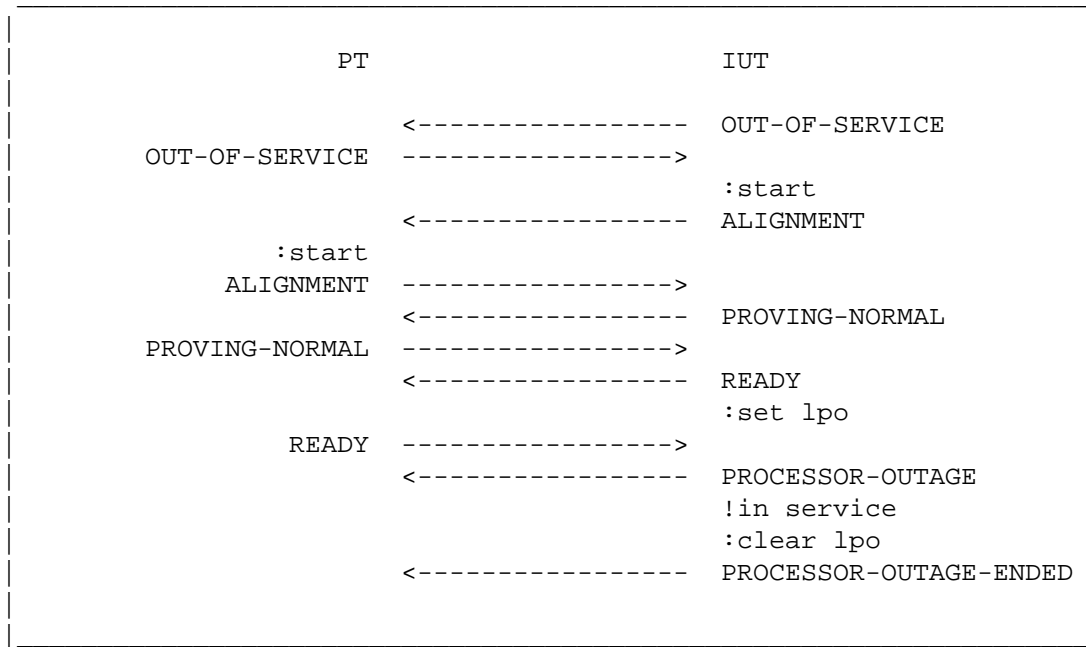


Figure 3.1.15-1. Set and clear LPO when "Aligned ready"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at both the IUT and the PT.
- (3) Check that the IUT follows the normal alignment procedure and sequence of events illustrated in *Figure 3.1.15-1*.
- (4) When the IUT has completed the initial alignment procedure, issues the Level 3 "Set Local Processor Outage" command at the IUT.
- (5) Check that the IUT sends a status "Processor Outage" message and indicates "In Service" to Level 3 at the IUT.
- (6) Issue the Level 3 "Clear Local Processor Outage" command at the IUT.
- (7) Check that the IUT sends a status "Processor Outage Ended" message and enters the "In Service" state.

**3.1.16. Timer T1 in "Aligned not ready" state**

This test case validates the T1 timer and procedures at the IUT when the IUT is in the "Aligned Not Ready" state. The expected sequence of events is illustrated *Figure 3.1.16-1*.



Reference: Q.781/Test 1.16

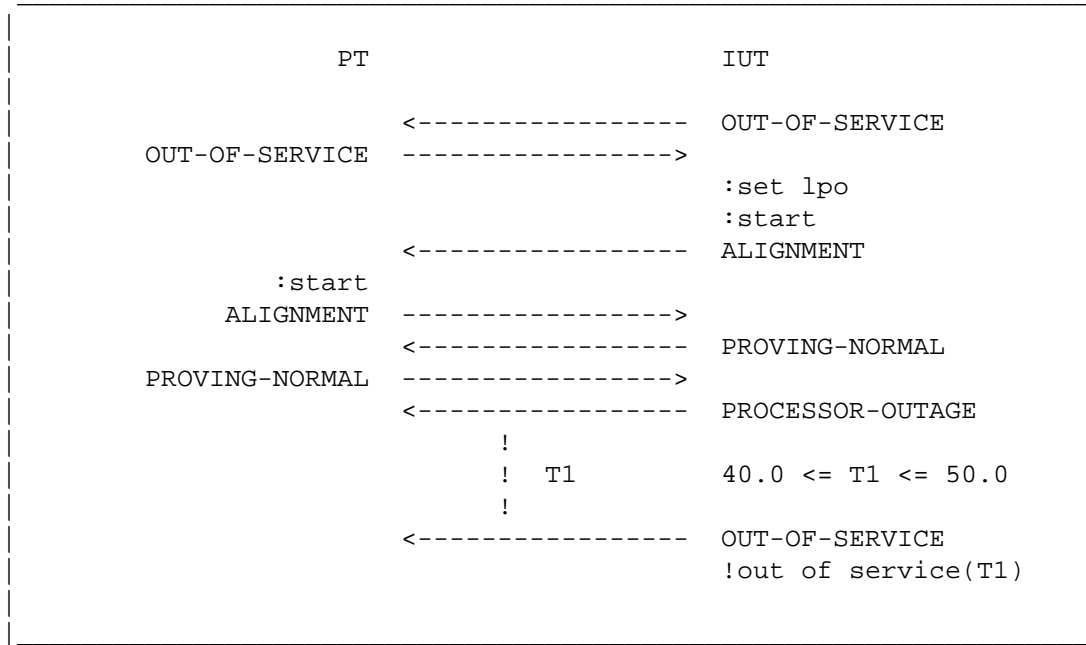


Figure 3.1.16-1. Timer T1 in "Aligned not ready" state

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and "Start" command at the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.1.16-1* while completing the initial alignment procedure.
- (4) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 with reason "T1 Timeout".
- (5) Check that T1 is between 40.0 seconds and 50.0 seconds in duration.

**3.1.17. No status "Alignment" sent during normal proving period**

This test validates that the normal alignment procedure completes at the IUT when no status "Alignment" message is sent. The expected sequence of events is illustrated *Figure 3.1.17-1*.

Reference: Q.781/Test 1.17

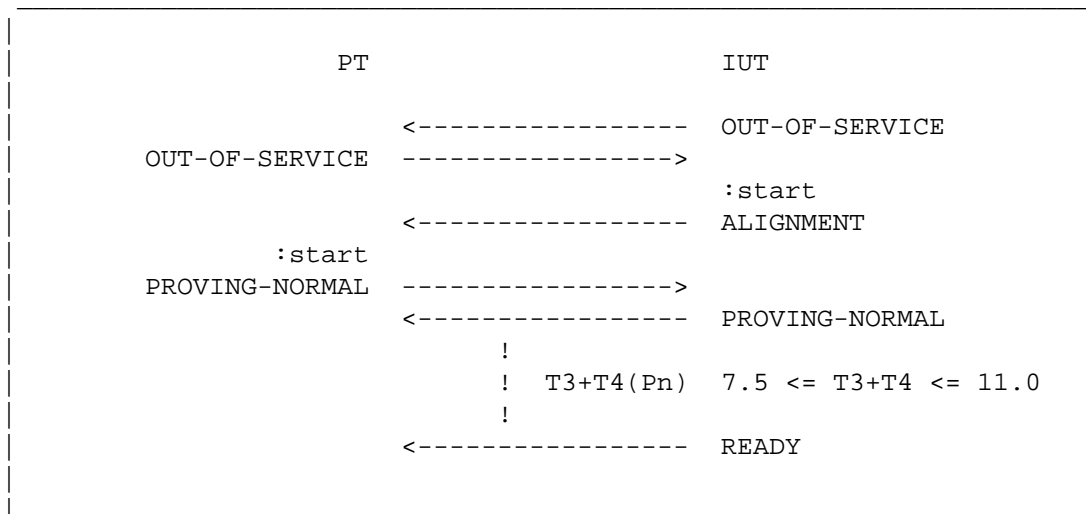


Figure 3.1.17-1. No "Alignment" during normal proving period


Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at both the IUT and the PT.
- (3) Respond to status "Alignment" message sent by the IUT with a status "Proving Normal" message and continue proving.
- (4) Check that the IUT sends a status "Ready" message within T4(Pn) plus T3.
- (5) Check that the delay from the start of the proving period to the status "Ready" message T4(Pn)+T3 is between 7.5 seconds and 11.0 seconds in duration.

**3.1.18. Set and cease emergency prior to "start alignment"**

This test case validates the behavior of the IUT when the Level 3 "Set Emergency" and "Clear Emergency" commands are issued prior to the Level 3 "Start" command at the IUT. The expected sequence of events is illustrated *Figure 3.1.18-1*.

Reference: Q.781/Test 1.18

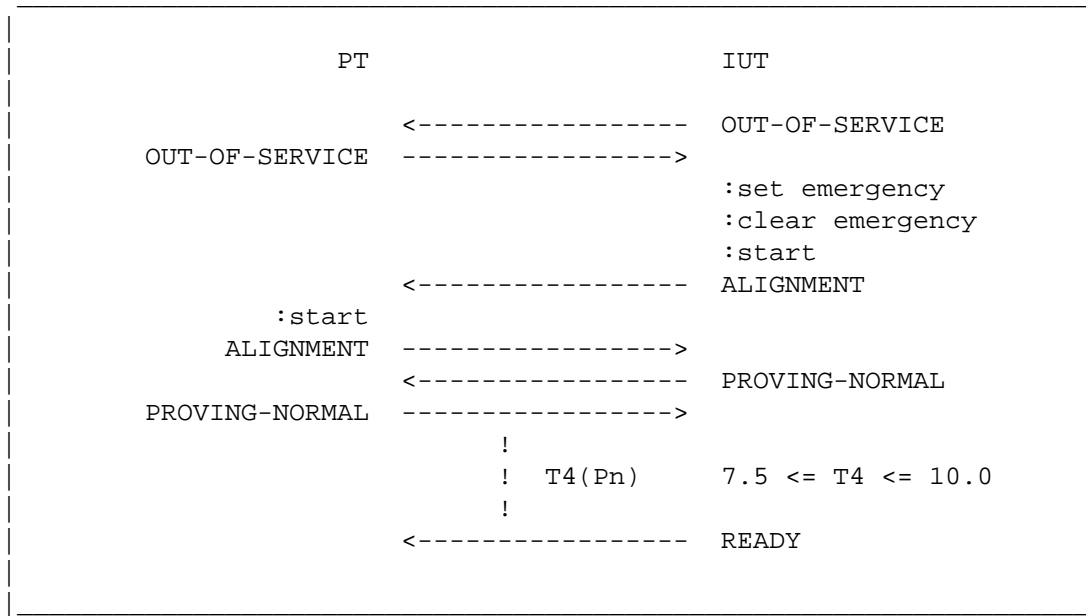

*Figure 3.1.18-1. Toggle emergency before "start alignment"*

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Emergency," "Clear Emergency" then "Start" commands at the IUT and "Start" command at the PT.
- (3) Check that the sequence of events are as illustrated in *Figure 3.1.18-1*. Check that the IUT sends a status "Proving Normal" message in response to the "Alignment" message.
- (4) Check that the IUT sends a status "Ready" message.
- (5) Check that the IUT uses a normal proving period by timing the delay from the status "Proving Normal" message to the status "Ready" message sent by the IUT.
- (6) Check that T4 is between 7.5 seconds and 10.0 seconds in duration.

**3.1.19. Set emergency while in "not aligned" state**

This test case validates the behavior of the IUT when the Level 3 "Set Emergency" command is issued at the IUT immediately after the Level 3 "Start" command (when the IUT is in the "Not Aligned" state). The expected sequence of events is illustrated *Figure 3.1.19-1*.

Reference: Q.781/Test 1.19

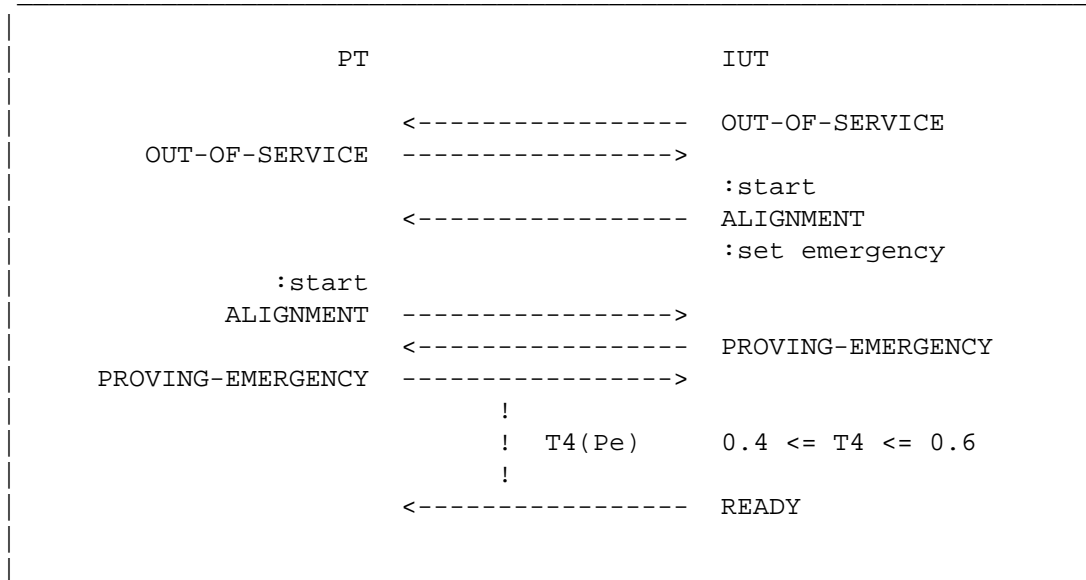


Figure 3.1.19-1. Set emergency in "not aligned" state

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" and "Set Emergency" commands at the IUT and "Start" command at the PT.
- (3) Check that the sequence of events are as illustrated in *Figure 3.1.19-1*. Check that the IUT sends a status "Proving Emergency" message in response to the "Alignment" message.
- (4) Check that the IUT sends a status "Ready" message.
- (5) Check that the IUT uses an emergency proving period by timing the delay from the status "Proving Emergency" message to the status "Ready" message sent by the IUT.
- (6) Check that T4 is between 0.4 seconds and 0.6 seconds in duration.

**3.1.20. Set emergency when "aligned"**

This test case validates the response of the IUT to the Level 3 "Set Emergency" command when issued in the "Aligned" state at the IUT. The expected sequence of events is illustrated *Figure 3.1.20-1*.

Reference: Q.781/Test 1.20

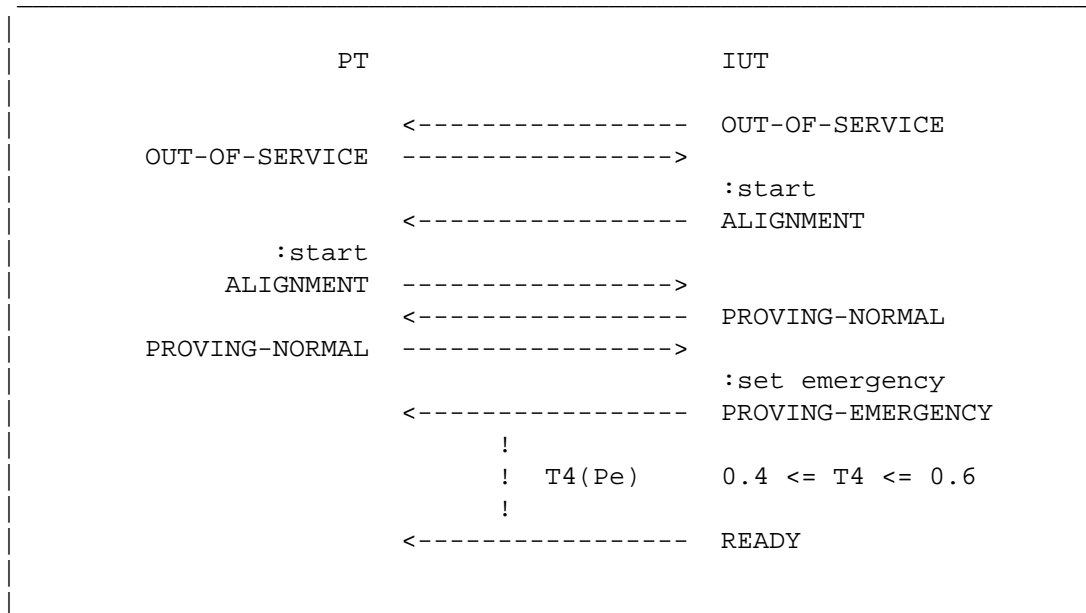


Figure 3.1.20-1. Set emergency when "aligned"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and the PT.
- (3) Check that the normal alignment procedure starts as illustrated in *Figure 3.1.20-1*.
- (4) Before the normal proving period completes, issue the Level 3 "Set Emergency" command at the ITU.
- (5) Check that the IUT sends a status "Proving Emergency" message and later follows with a status "Ready" message.
- (6) Check that the IUT begins an emergency proving period by timing the delay from the status "Proving Emergency" message to the status "Ready" message.
- (7) Check that T4 is between 0.4 seconds and 0.6 seconds in duration.

**3.1.21. Both ends set emergency.**

This test case validates the IUT behavior when the Level 3 "Set Emergency" command is issued at both ends of the link before the Level 3 "Start" command. The expected sequence of events is illustrated *Figure 3.1.21-1*.

Reference: Q.781/Test 1.21

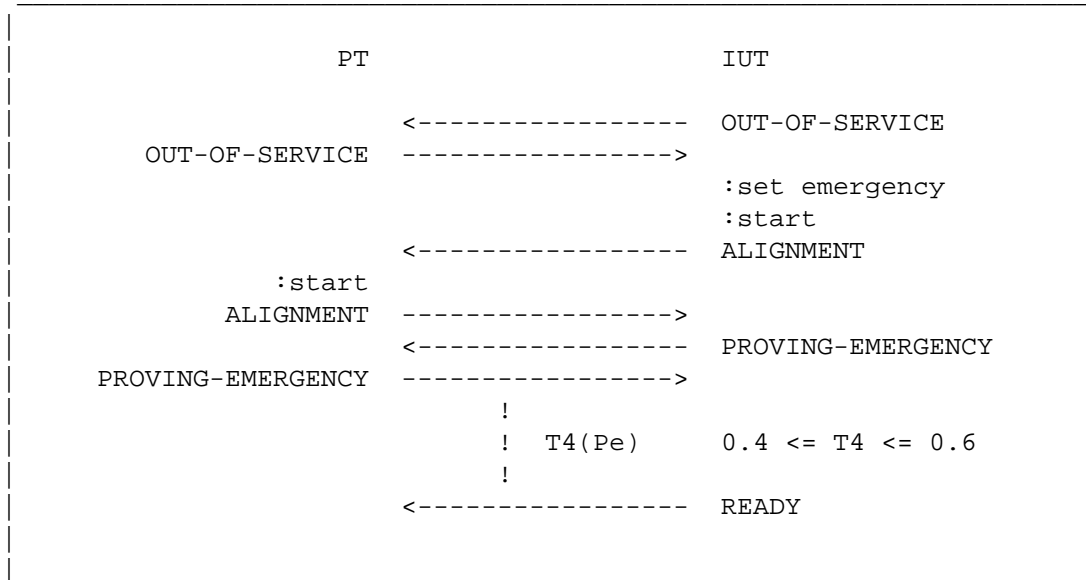


Figure 3.1.21-1. Both ends set emergency

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Emergency" and "Start" commands at the IUT and the "Start" command at the PT.
- (3) Check that the IUT starts the emergency alignment procedure by sending a status "Proving Emergency" message.
- (4) Check that the IUT follows the sequence of events as illustrated in *Figure 3.1.21-1*. Check that the IUT completes the alignment procedure and sends a status "Ready" message.
- (5) Check that the IUT uses an emergency proving period by timing the delay between sending the status "Proving Normal" message and the status "Ready" message.
- (6) Check that T4 is between 0.4 seconds and 0.6 seconds in duration.

**3.1.22. Individual end sets emergency**

This test case validates the behavior of the IUT when emergency is individually set at the PT before the initial alignment procedure begins. The expected sequence of events is illustrated *Figure 3.1.22-1*.

Reference: Q.781/Test 1.22

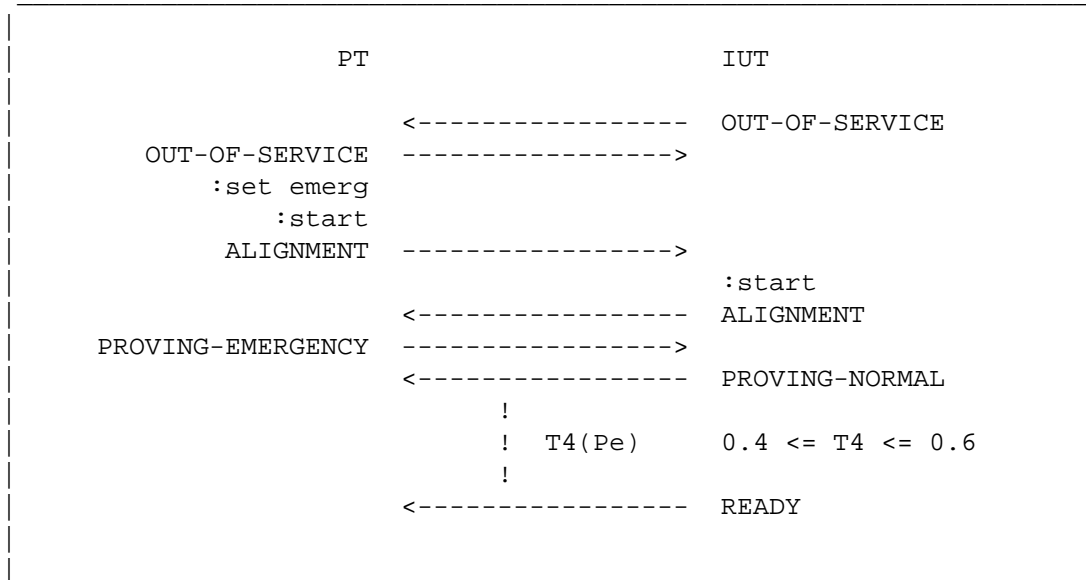


Figure 3.1.22-1. Individual end sets emergency

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Emergency" and "Start" commands at the PT and the "Start" command at the IUT.
- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.22-1*.
- (4) Check that the IUT uses the emergency proving period by timing the delay between the status "Proving Normal" message and the status "Ready" message.
- (5) Check that T4 is between 0.4 seconds and 0.6 seconds in duration.

### 3.1.23. Set emergency during normal proving

This test case validates the IUT behavior when it receives a Level 3 "Set Emergency" command after it has already commenced normal proving. The expected sequence of events is illustrated *Figure 3.1.23-1*.

Reference: Q.781/Test 1.23

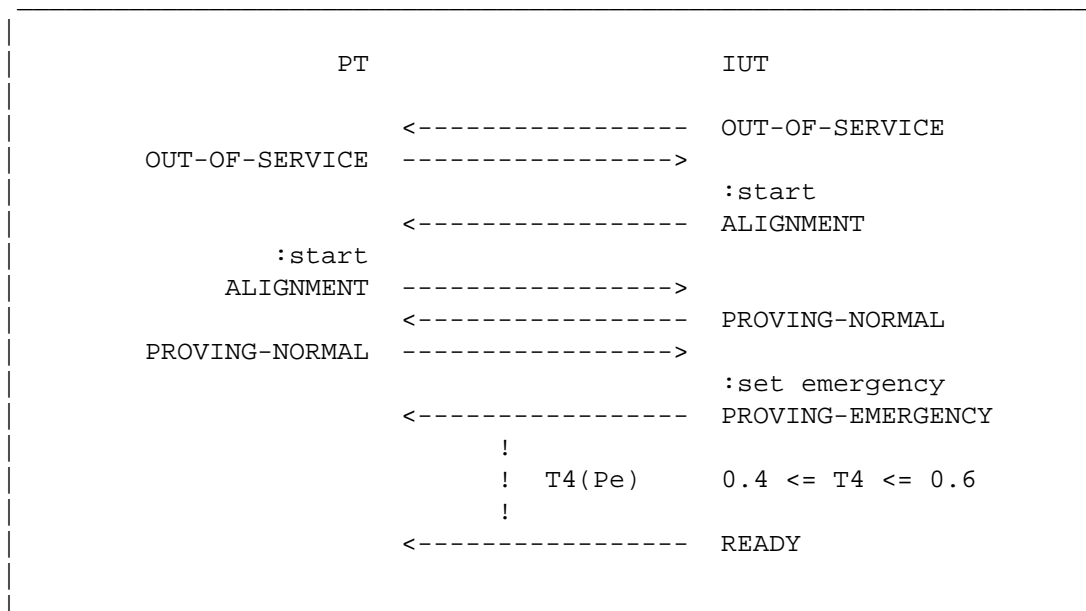


Figure 3.1.23-1. Set emergency during normal proving


Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and the PT.
- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.23-1*.
- (4) Before the normal proving period completes at the IUT, issue the Level 3 "Set Emergency" command at the IUT.
- (5) Check that the IUT sends a status "Proving Emergency" message and continues proving.
- (6) Check that the IUT sends a status "Ready" message.
- (7) Check that the IUT uses an emergency proving period by timing the delay between the status "Proving Emergency" message and the status "Ready" message.
- (8) Check that T4 is between 0.4 seconds and 0.6 seconds in duration.

**3.1.24. No status "Alignment" sent during emergency alignment**

This test case validates the response of the IUT to receiving a status "Proving Normal" without a status "Alignment" during initial alignment using an emergency proving period. The expected sequence of events is illustrated *Figure 3.1.24-1*.

Reference: Q.781/Test 1.24

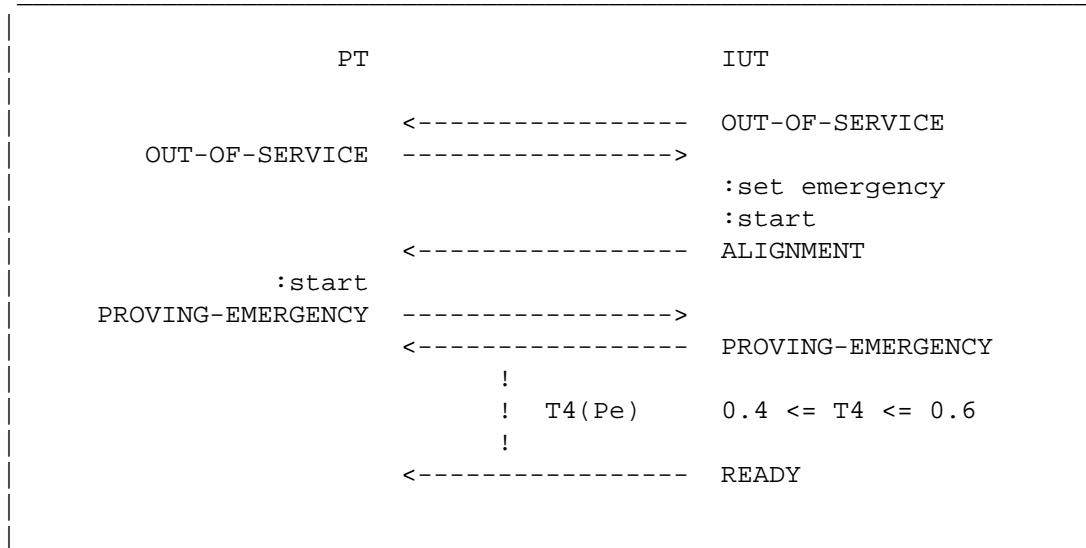

*Figure 3.1.24-1. No "Alignment" during emergency alignment*

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Emergency" and "Start" commands at both the IUT and PT.
- (3) Check that the IUT sends a status "Proving Emergency" message and starts proving.
- (4) Check that the IUT completes proving and sends a status "Ready" message.
- (5) Check that the IUT uses an emergency proving period by timing the delay between the status "Proving Emergency" message and the status "Ready" message.
- (6) Check that T4 is between 0.4 seconds and 0.6 seconds in duration.

**3.1.25. Deactivation during initial alignment**

This test case validates the behavior of the IUT in response to the Level 3 "Stop" command issued during the "Initial Alignment" state at the IUT. The expected sequence of events is illustrated *Figure 3.1.25-1*.

Reference: Q.781/Test 1.25

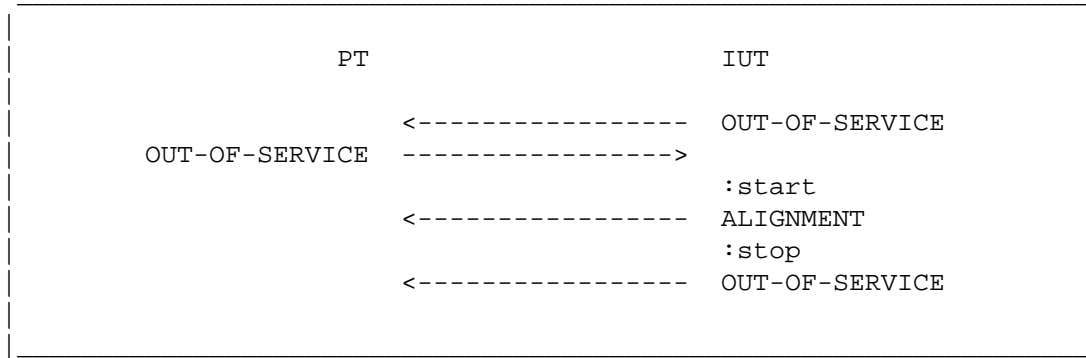


Figure 3.1.25-1. Deactivate during initial alignment

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT.
- (3) Before timer T2 expires, issue the Level 3 "Stop" command at the IUT.
- (4) Check that the IUT sends a status "Out of Service" message and stays in the "Out of Service" state.

**3.1.26. Deactivation during aligned state**

This test case validates the behavior of the IUT in response to the Level 3 "Stop" command issued during "Aligned" state at the IUT. The expected sequence of events is illustrated *Figure 3.1.26-1*.

Reference: Q.781/Test 1.26

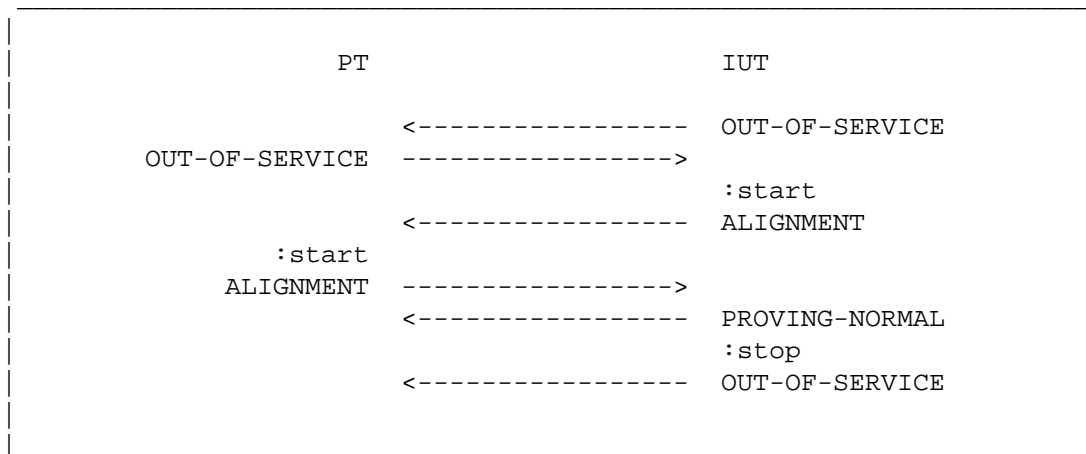


Figure 3.1.26-1. Deactivate during aligned state

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.1.26-1*.
- (4) Issue the Level 3 "Stop" command at the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and stays in the "Out of Service" state.

**3.1.27. Deactivation during aligned not ready**

This test case validates the behavior of the IUT in response to the Level 3 "Stop" command issued during the "Aligned Not Ready" state at the IUT. The expected sequence of events is illustrated *Figure 3.1.27-1*.



Reference: Q.781/Test 1.27

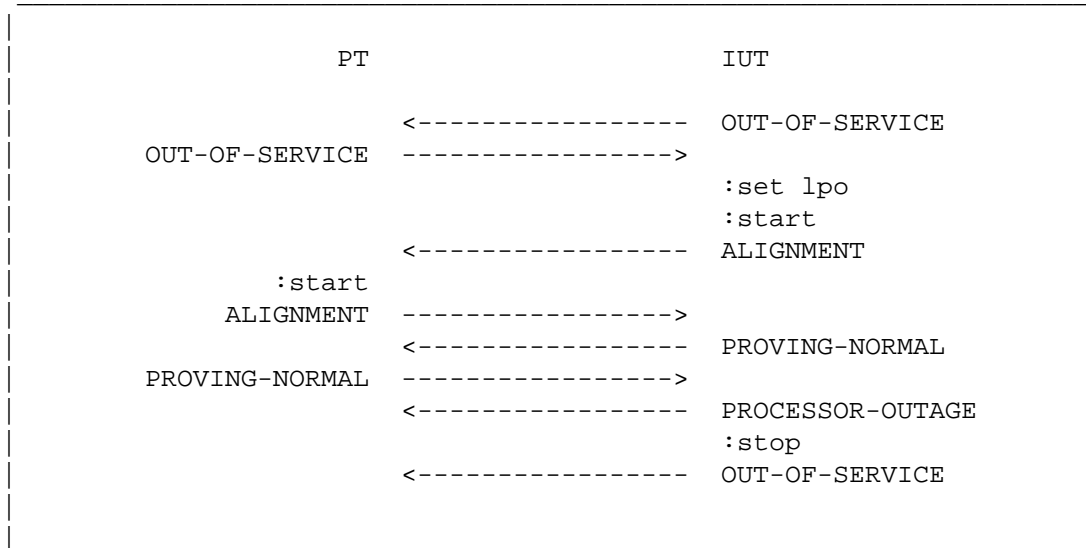


Figure 3.1.27-1. Deactivate during aligned not ready

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and the "Start" command at the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.1.27-1* and sends a status "Processor Outage" message.
- (4) Issue the Level 3 "Stop" command at the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and stays in the "Out of Service" state.

**3.1.28. Status "alignment" received during link in service**

This test case validates the IUT response to receiving a status "Alignment" message in the "In Service" state. The expected sequence of events is illustrated *Figure 3.1.28-1*.

Reference: Q.781/Test 1.28

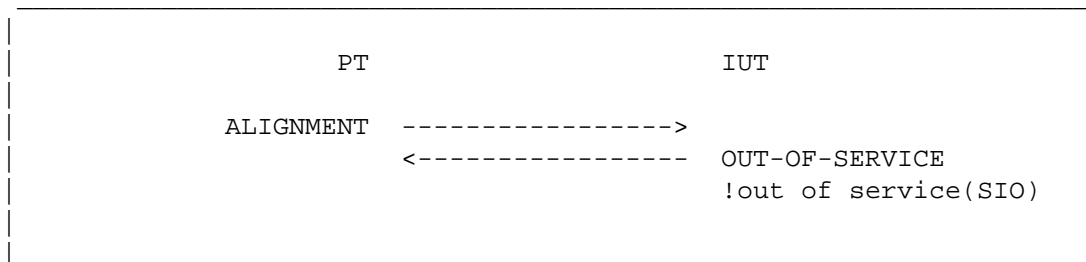


Figure 3.1.28-1. "Alignment" during link in service

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Send a status "Alignment" to the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 with reason "Received SIO".


**3.1.29. Status "out of service" received during link in service**

This test case validates the response of the IUT to sending or receiving a status "Out of Service" message in the "In Service" state.

**3.1.29.1. Forward Direction**

The test case is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.29-1*.

Reference: Q.781/Test 1.29(a)

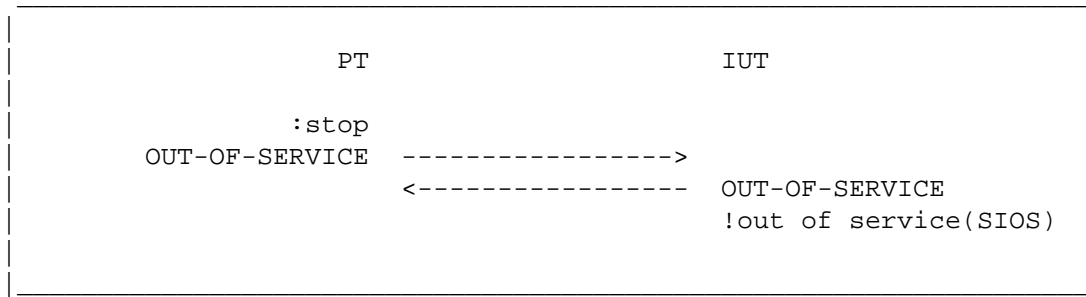

*Figure 3.1.29-1. "Out of service" during link in service*


Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Stop" command at the PT and send a status "Out of Service" message to the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to the Level 3 at the IUT with reason "Received SIOS".

**3.1.29.2. Reverse Direction**

The test case is repeated in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.29-2*.

Reference: Q.781/Test 1.29(b)

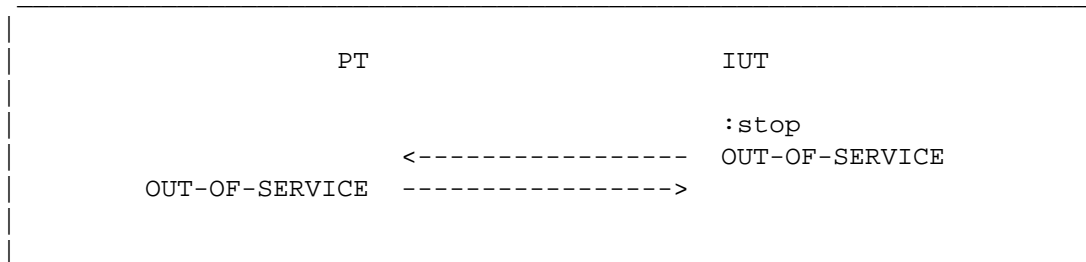

*Figure 3.1.29-2. "Out of service" during link in service*

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Stop" command at the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and stays in the "Out of Service" state.

**3.1.30. Deactivation during LPO**

These test cases validate the response of the IUT to sending a status "Out of Service" message while in the "Processor Outage" state with LPO set, or receiving an "Out of Service" message from an M2PA peer in the "Processor Outage" state with RPO set.

**3.1.30.1. Forward Direction**

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.30-1*.

Reference: Q.781/Test 1.30(a)

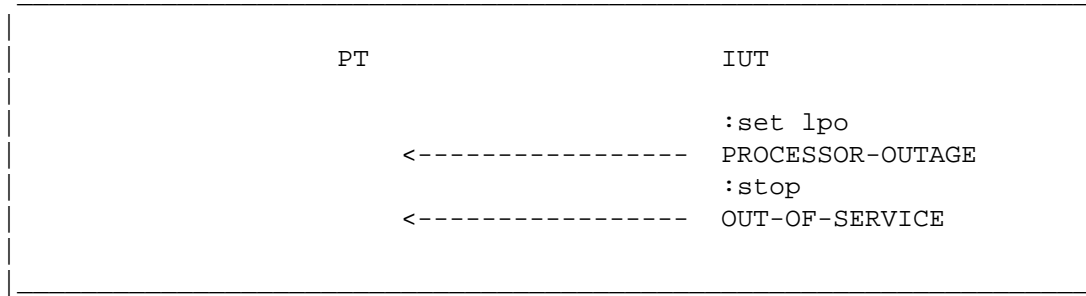


Figure 3.1.30-1. Deactivation during LPO

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" command at the IUT.
- (3) Check that the IUT sends a status "Processor Outage" message.
- (4) Issue the Level 3 "Stop" command at the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and stays in the "Out of Service" state.

**3.1.30.2. Reverse Direction**

The test is repeated in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.30-2*.

Reference: Q.781/Test 1.30(b)

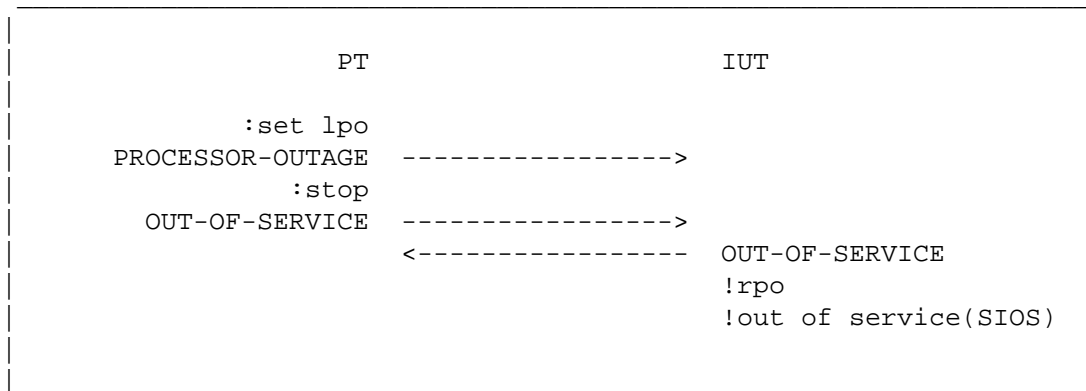


Figure 3.1.30-2. Deactivation during LPO

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Stop" commands at the PT.
- (3) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Received SIOS".

**3.1.31. Deactivation during RPO**

These test cases validate the response of the IUT to sending a status "Out of Service" message while in the "Processor Outage" state with RPO set, or receiving an "Out of Service" message from an M2PA peer in the "Processor Outage" state with LPO set.

**3.1.31.1. Forward Direction**

The test is performed in the forward direction. The expected sequence of events is illustrated *Figure 3.1.31-1*.

Reference: Q.781/Test 1.31(a)

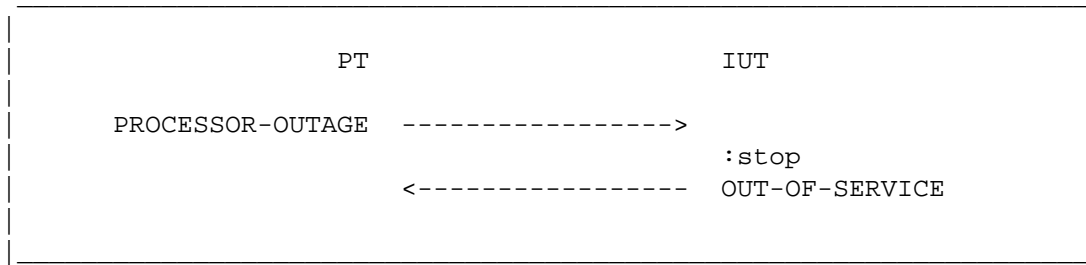


Figure 3.1.31-1. Deactivation during RPO

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" command at the PT and send a status "Processor Outage" message to the IUT.
- (3) Issue the Level 3 "Stop" command at the IUT.
- (4) Check that the IUT sends the status "Out of Service" message and remains in the "Out of Service" state.

**3.1.31.2. Reverse Direction**

The test is repeated in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.31-2*.

Reference: Q.781/Test 1.31(b)

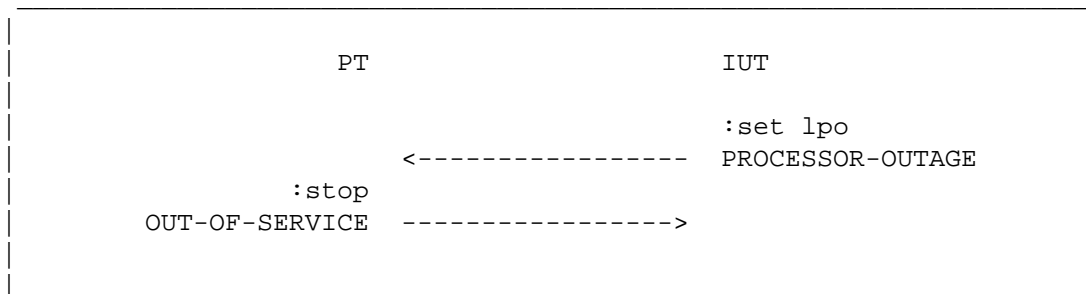


Figure 3.1.31-2. Deactivation during RPO

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" command at the IUT.
- (3) Check that the IUT sends a status "Processor Outage" message.
- (4) Issue the Level 3 "Stop" command at the PT and send the status "Out of Service" message.
- (5) Check that the IUT does not indicate "Out of Service" until the local processor outage condition recovers.

**3.1.32. Deactivation during the proving period**

These test cases validate the response of the IUT to deactivation (sending or receiving a status "Out of Service" message) during the proving period.

**3.1.32.1. Forward Direction**

The expected sequence of events is illustrated *Figure 3.1.32-1*.

Reference: Q.781/Test 1.32(a)

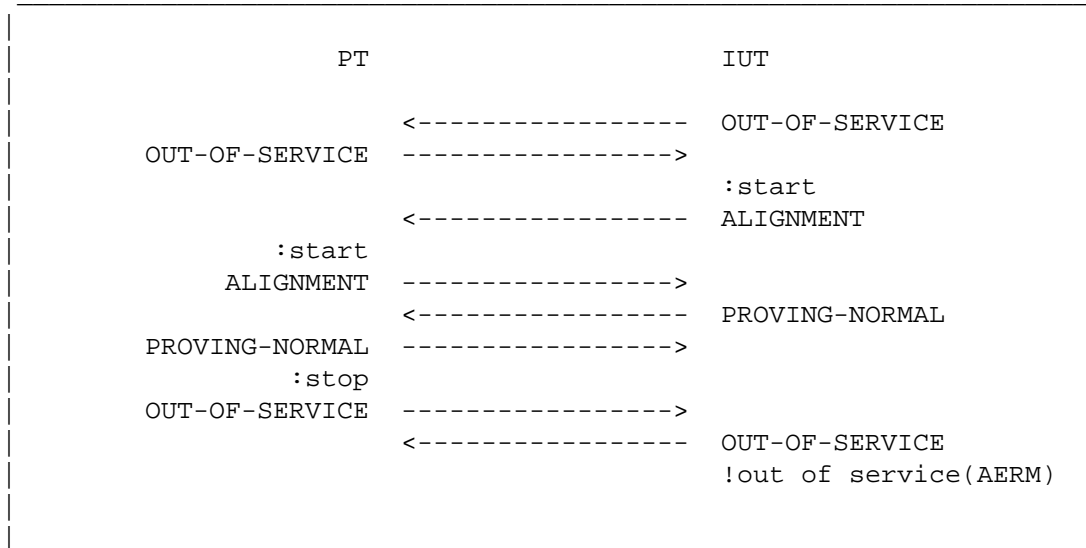


Figure 3.1.32-1. Deactivation during the proving period

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the IUT and the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.1.32-1*.
- (4) During the proving period, issue the Level 3 "Stop" command at the PT and send status "Out of Service" to the ITU.
- (5) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Alignment Not Possible".

**3.1.32.2. Reverse Direction**

The test is repeated in the reverse direction. The expected sequence of events is illustrated *Figure 3.1.32-2*.

Reference: Q.781/Test 1.32(b)

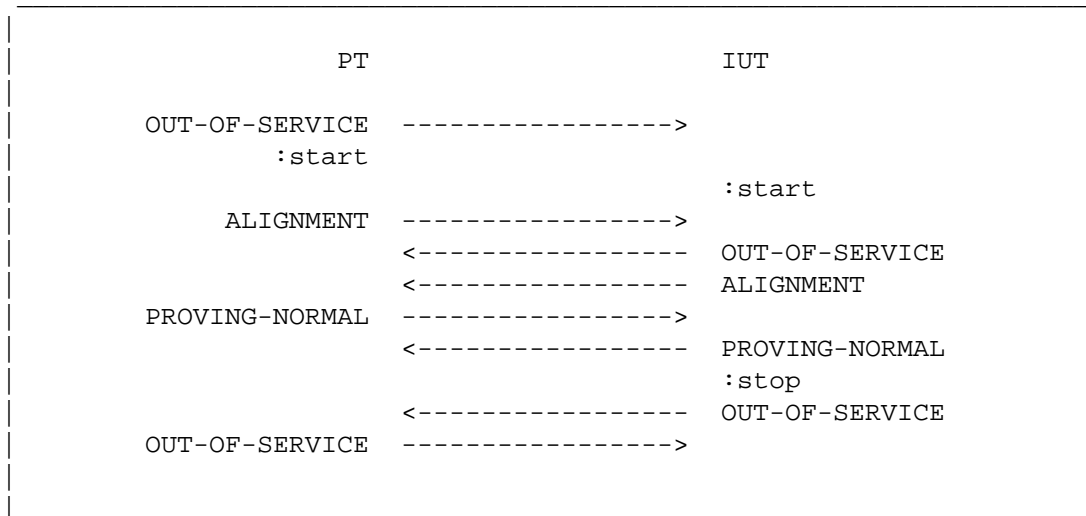


Figure 3.1.32-2. Deactivation during the proving period

Test Description:


- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue the Level 3 "Start" command at the PT and the IUT.

- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.32-2*.
- (4) During the proving period, issue a Level 3 "Stop" command at the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and remains in the "Out of Service" state.

**3.1.33. Status "Alignment" received instead of status "Ready"**

This test case validates the response of the IUT to receiving a status "Alignment" message instead of a status "Ready" or "Processor Outage" message at the completion of initial alignment. The expected sequence of events is illustrated *Figure 3.1.33-1*.

Reference: Q.781/Test 1.33

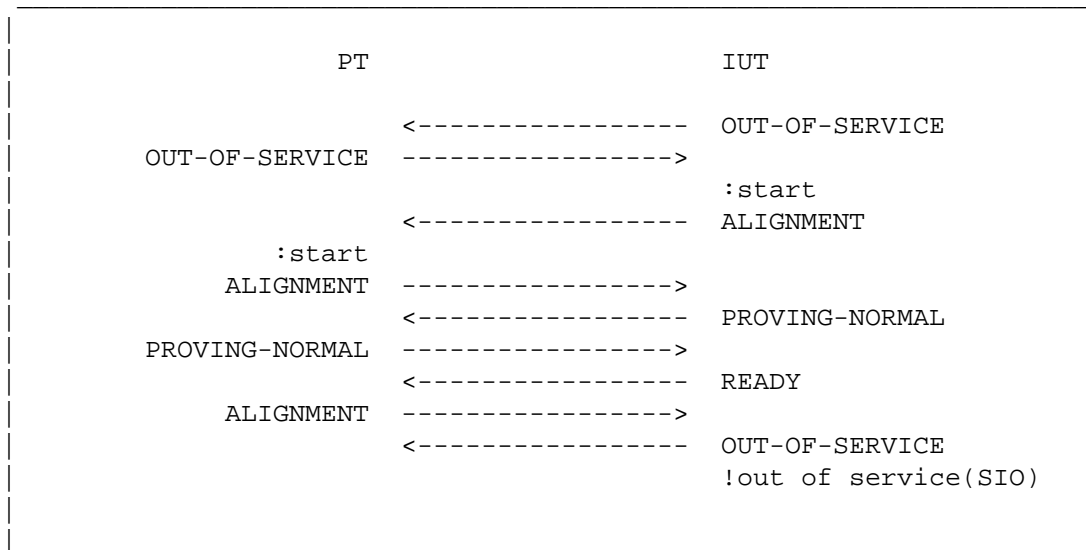

*Figure 3.1.33-1. "Alignment" instead of "In Service"*

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue a Level 3 "Start" command at the IUT and the PT.
- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.33-1*.
- (4) When the IUT sends a status "Ready" message, send a status "Alignment" message to the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Received SIO".

**3.1.34. Status "Out of Service" received instead of status "Ready"**

This test case validates the response of the IUT to receiving a status "Out of Service" message instead of a status "Ready" or "Processor Outage" message at the completion of initial alignment. The expected sequence of events is illustrated *Figure 3.1.34-1*.

Reference: Q.781/Test 1.34

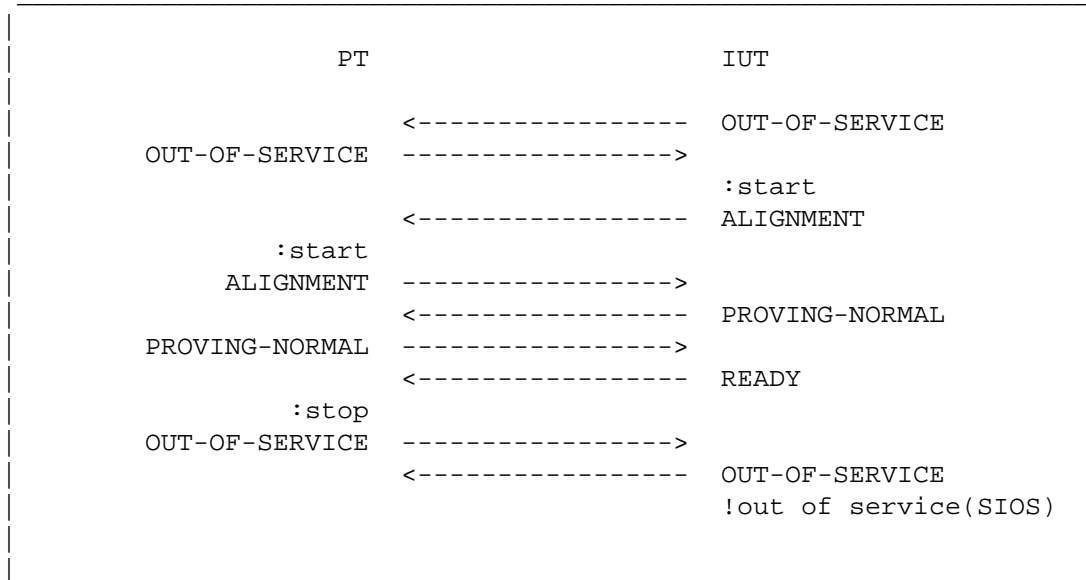


Figure 3.1.34-1. "Out of Service" instead of "In Service"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue a Level 3 "Start" command at the IUT and the PT.
- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.34-1*.
- (4) When the IUT sends a status "Ready" message, send a status "Out of Service" message to the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Received SIOS".

### 3.1.35. Status "Processor Outage" received instead of status "Ready"

This test case validates the response of the IUT to receiving a status "Processor Outage" message instead of a status "Ready" message at the completion of initial alignment. The expected sequence of events is illustrated *Figure 3.1.35-1*.

Reference: Q.781/Test 1.35

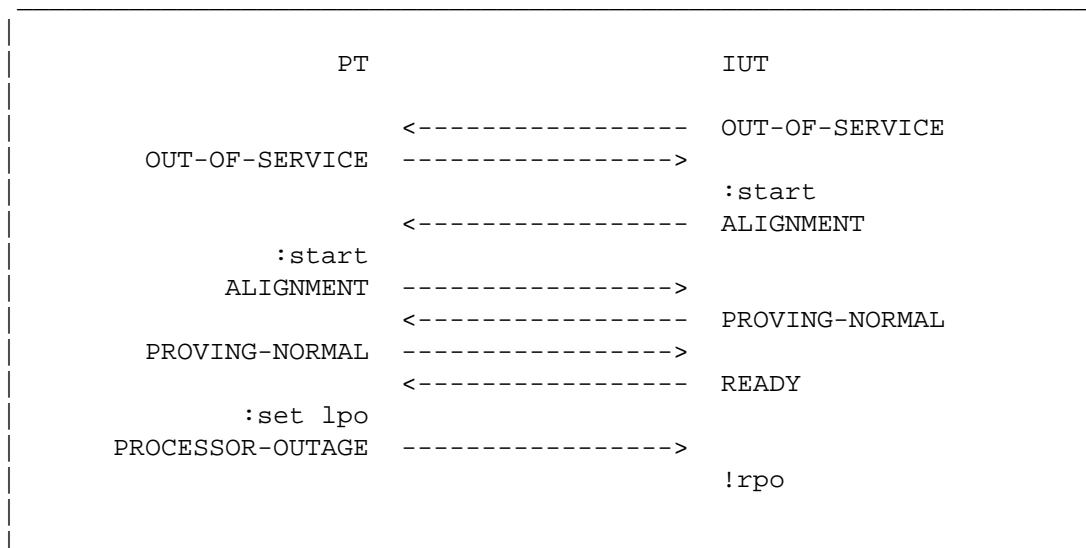


Figure 3.1.35-1. "Processor Outage" instead of "In Service"

Test Description:

- (1) The test begins with the link in the "Out of Service" state.
- (2) Issue a Level 3 "Start" command at the IUT and the PT.
- (3) Check that the sequence of events follows that illustrated in *Figure 3.1.35-1*.
- (4) When the IUT sends a status "Ready" message, issue a Level 3 "Set Local Processor Outage" command at the PT and send a status "Processor Outage" message to the IUT.
- (5) Check that the IUT indicates "Remote Processor Outage" to Level 3 at the IUT.


**3.2. Link State Control - Unexpected signal units/orders**

This suite of test cases test the response of the Implementation Under Test to unexpected sequences Level 3 requests and received M2PA messages in various states. These test cases validates the robustness of the implementation in responding to unusual circumstances.

**3.2.1. Unexpected signal units/orders in "Out of service" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 requests and receipt of unexpected M2PA messages while in the "Out of Service" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.1-1*.

Reference: Q.781/Test 2.1

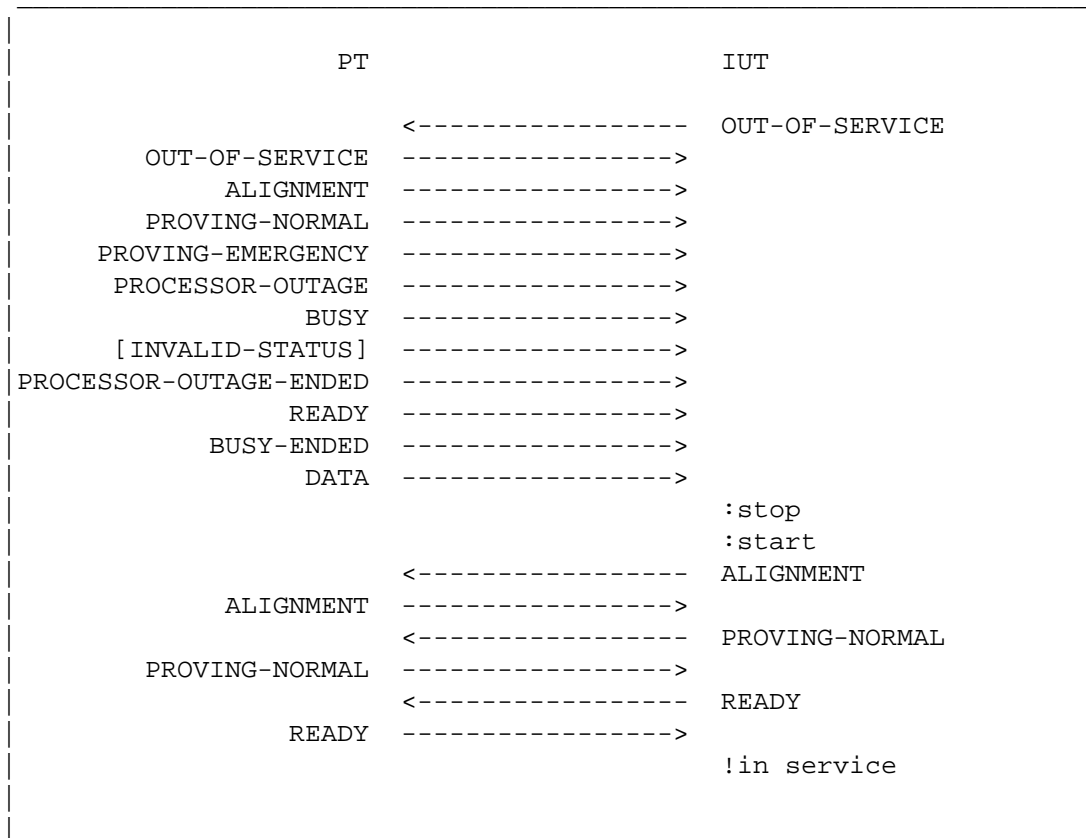

*Figure 3.2.1-1. Unexpected events in the "Out of Service" State*

Test Description:

- (1) The test begins with both M2PA peers in the "Out of Service" state.
- (2) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Out of Service"
  - Status "Alignment"
  - Status "Proving Normal"
  - Status "Proving Emergency"
  - Status "Processor Outage"
  - Status "Busy"




- Status Invalid
  - Status "Processor Outage Ended"
  - Status "Busy Ended"
  - Status "Ready"
  - Data
- (3) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
    - Level 3 "Stop" command
  - (4) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
  - (5) The Level 3 "Start" command is then issued.
  - (6) Check that the link aligns normally.
  - (7) Check that link alignment uses normal alignment procedures.
  - (8) Check that the link goes in service and stays in service without local or remote processor outage indications to Level 3.

**3.2.2. Unexpected signal units/orders in "Not Aligned" state**

This test case validates the response of the IUT to the receipt of unexpected Level 3 requests and receipt of unexpected M2PA messages while in the "Not Aligned" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.2-1*.

Reference: Q.781/Test 2.2

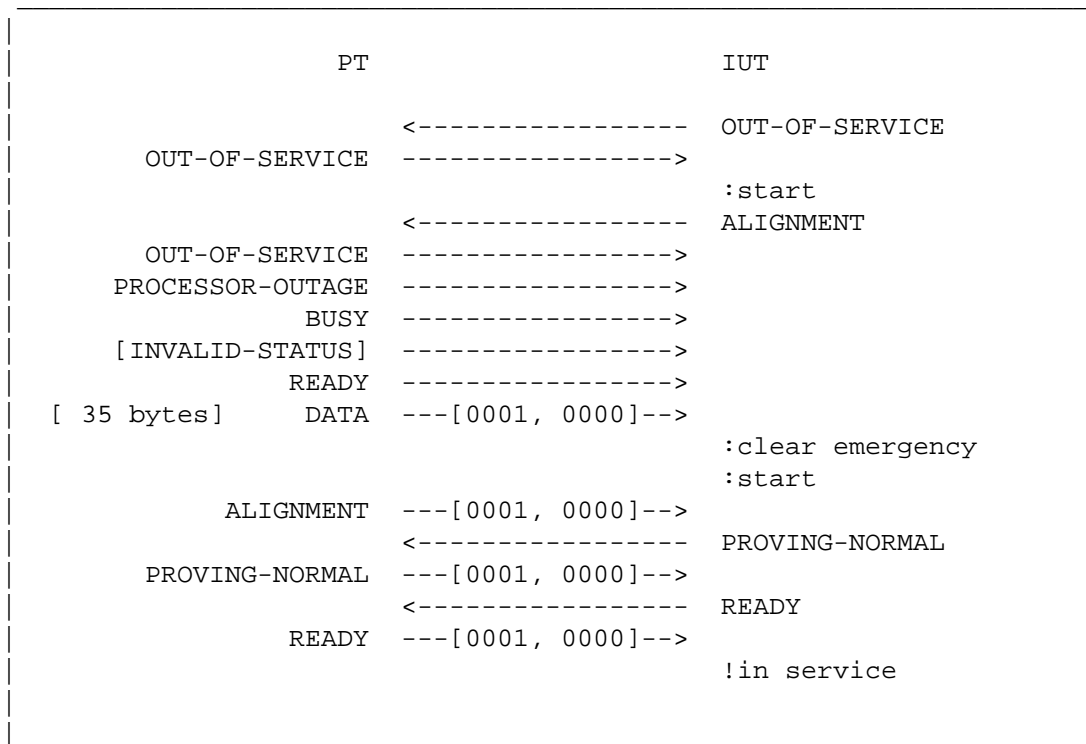

*Figure 3.2.2-1. Unexpected events while "not aligned"*

**Test Description:**


- (1) The test begins with both M2PA peers in the "Out of Service" state.
- (2) The Level 3 "Start" command is issued to IUT to place the IUT in the "Not Aligned" state.
- (3) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Out of Service"
  - Status "Processor Outage"
  - Status "Busy"
  - Status Invalid

- Status "Ready"
  - Data
- (4) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
    - Level 3 "Clear Emergency" command
    - Level 3 "Start" command
  - (5) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
  - (6) A status "Alignment" is then sent to the IUT.
  - (7) Check that the IUT aligns as usual and performs the normal alignment procedures.
  - (8) Check that the IUT places the link in service and that no local or remote processor outage indications are given to Level 3 at the IUT.

**3.2.3. Unexpected signal units/orders in "Aligned" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 request and receipt of unexpected M2PA messages while in the "Aligned" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.3-1*.

Reference: Q.781/Test 2.3

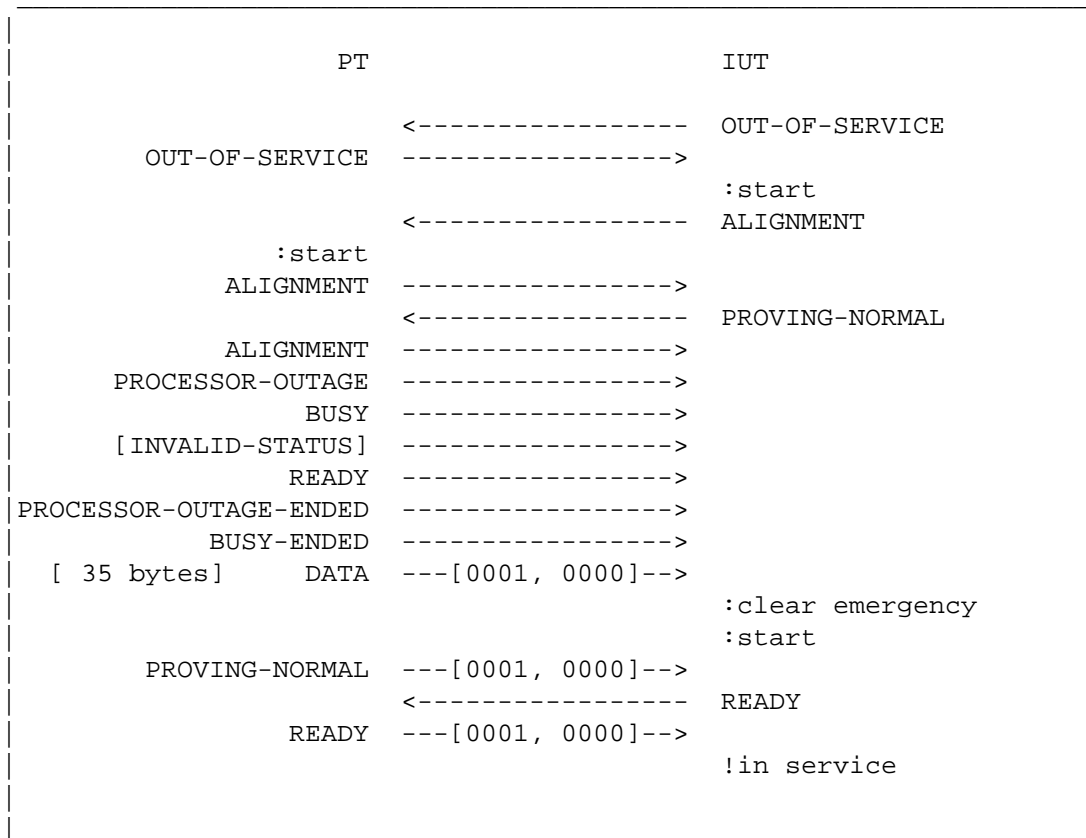

*Figure 3.2.3-1. Unexpected events while "aligned"*

Test Description:


- (1) The test begins with both IUT and PT in the "Out of Service" state.
- (2) The IUT is brought to the "Aligned" state using normal procedures.
- (3) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Alignment"
  - Status "Processor Outage"
  - Status "Busy"
  - Status Invalid
  - Status "Ready"

- Status "Processor Outage Ended"
  - Status "Busy Ended"
  - Data
- (4) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
    - Level 3 "Clear Emergency" command
    - Level 3 "Start" command
  - (5) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
  - (6) Check that the IUT aligns as usual and performs the normal alignment procedure.
  - (7) Check that the IUT places the link in service and that no local or remote processor outage indications are given to Level 3 at the IUT.

**3.2.4. Unexpected signal units/orders in "Proving" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 request and receipt of unexpected M2PA messages while in the "Proving" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.4-1*.

Reference: Q.781/Test 2.4

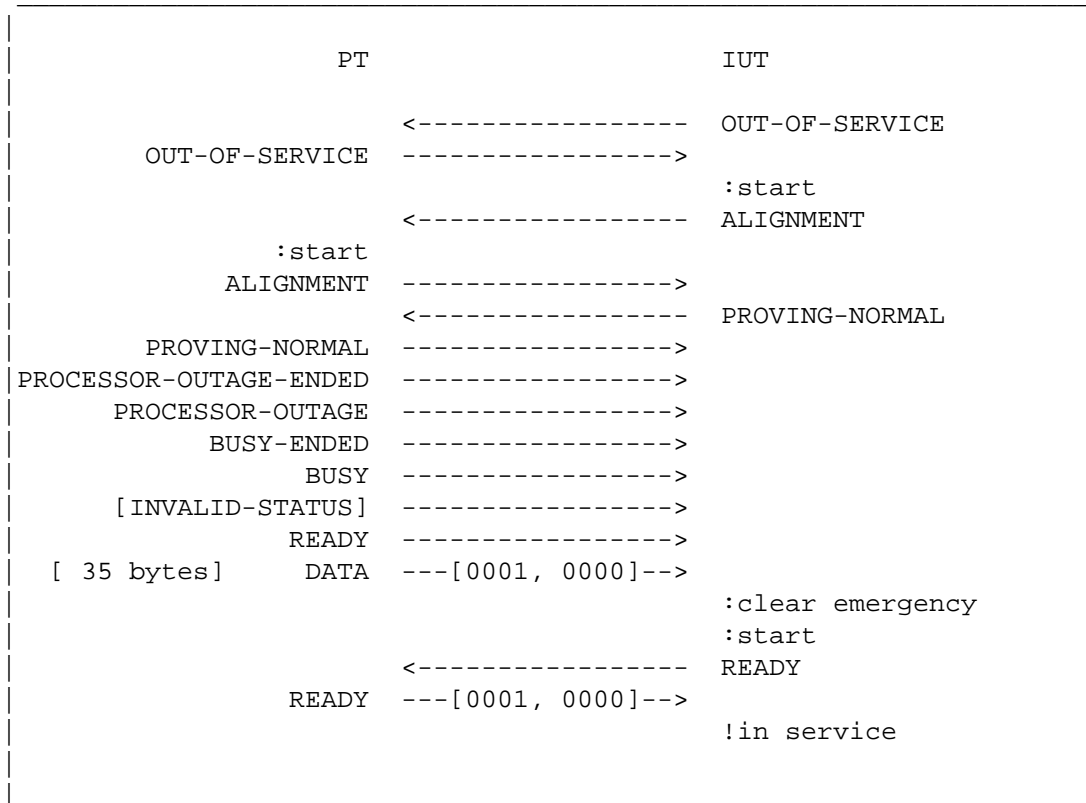

*Figure 3.2.4-1. Unexpected events while "proving"*

**Test Description:**

- (1) The test begins with both IUT and PT in the "Out of Service" state.
- (2) The IUT is brought to the "Proving" state using normal procedures.
- (3) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Processor Outage Ended"
  - Status "Processor Outage"
  - Status "Busy Ended"
  - Status "Busy"
  - Status Invalid
  - Status "Ready"


- Data

- (4) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
  - Level 3 "Clear Emergency" command
  - Level 3 "Start" command
- (5) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
- (6) Check that the IUT aligns as usual and performs the normal alignment procedure.
- (7) Check that the IUT places the link in service and that no local or remote processor outage indications are given to Level 3 at the IUT.

**3.2.5. Unexpected signal units/orders in "Aligned Ready" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 request and receipt of unexpected M2PA messages while in the "Aligned Ready" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.5-1*.

Reference: Q.781/Test 2.5

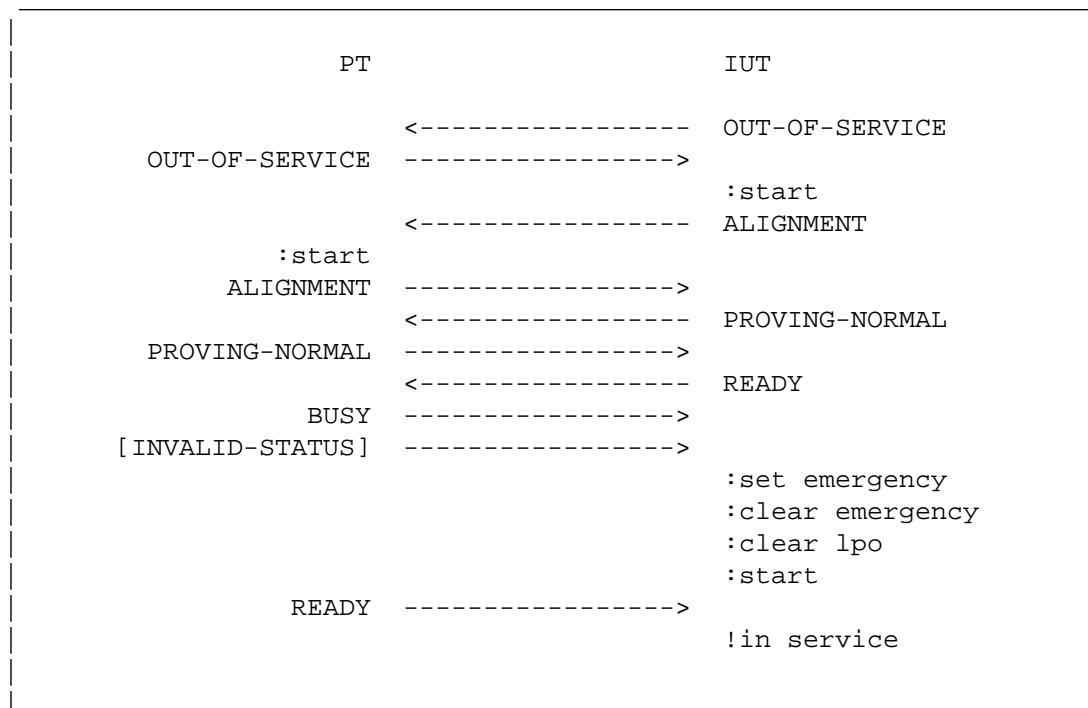

*Figure 3.2.5-1. Unexpected events while "aligned ready"*

Test Description:


- (1) The test begins with both IUT and PT in the "Out of Service" state.
- (2) The IUT is brought to the "Aligned Ready" state using normal procedures.
- (3) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Busy"
  - Status Invalid
- (4) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
  - Level 3 "Set Emergency" command
  - Level 3 "Clear Emergency" command
  - Level 3 "Clear Local Processor Outage" command
  - Level 3 "Start" command
- (5) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.

- (6) Check that the IUT aligns as usual and performs the normal alignment procedure.
- (7) Check that the IUT places the link in service and that no local or remote processor outage indications are given to Level 3 at the IUT.

**3.2.6. Unexpected signal units/orders in "Aligned Not Ready" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 request and receipt of unexpected M2PA messages while in the "Aligned Not Ready" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.6-1*.

Reference: Q.781/Test 2.6

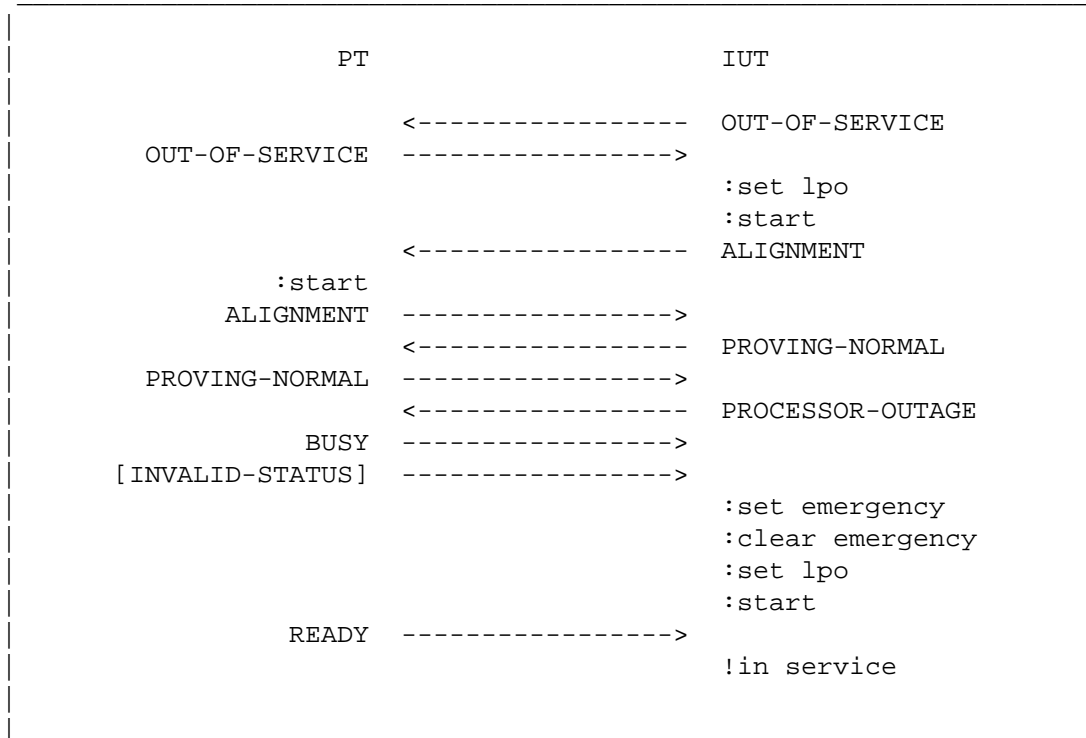

*Figure 3.2.6-1. Unexpected events while "aligned not ready"*

Test Description:

- (1) The test begins with both IUT and PT in the "Out of Service" state.
- (2) The IUT is brought to the "Aligned Not Ready" state using normal procedures.
- (3) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Busy"
  - Status Invalid
- (4) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
  - Level 3 "Set Emergency" command
  - Level 3 "Clear Emergency" command
  - Level 3 "Set Local Processor Outage" command
  - Level 3 "Start" command
- (5) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
- (6) Check that the IUT places the link in service.

**3.2.7. Unexpected signal units/orders in "In Service" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 request and receipt of unexpected M2PA messages while in the "In Service" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.7-1*.

Reference: Q.781/Test 2.7

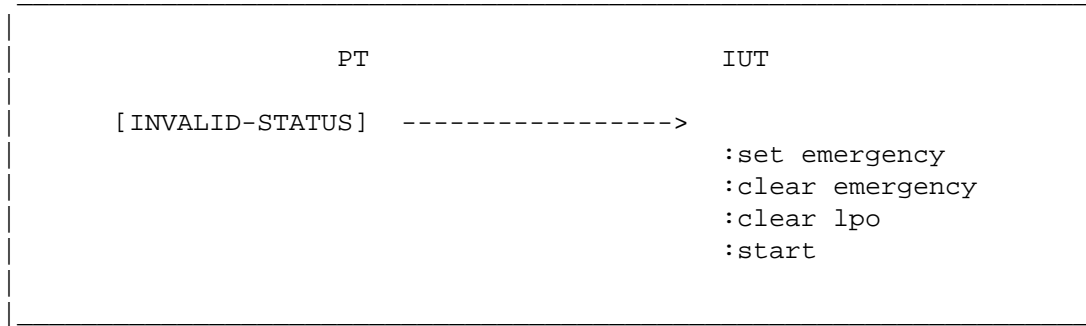


Figure 3.2.7-1. Unexpected events while "in service"

Test Description:

- (1) The test begins with both IUT and PT in the "In Service" state.
- (2) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status Invalid
- (3) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
  - Level 3 "Set Emergency" command
  - Level 3 "Clear Emergency" command
  - Level 3 "Clear Local Processor Outage" command
  - Level 3 "Start" command
- (4) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
- (5) Check that the IUT retains the link in the in service state and that no local or remote processor outage indications are given to Level 3 at the IUT.

**3.2.8. Unexpected signal units/orders in "Processor Outage" state**

This case validates the response of the IUT to the receipt of unexpected Level 3 request and receipt of unexpected M2PA messages while in the "Processor Outage" state. All of the unexpected sequences in this test case must be ignored by the IUT. The expected sequence of events is illustrated *Figure 3.2.8-1*.

Reference: Q.781/Test 2.8

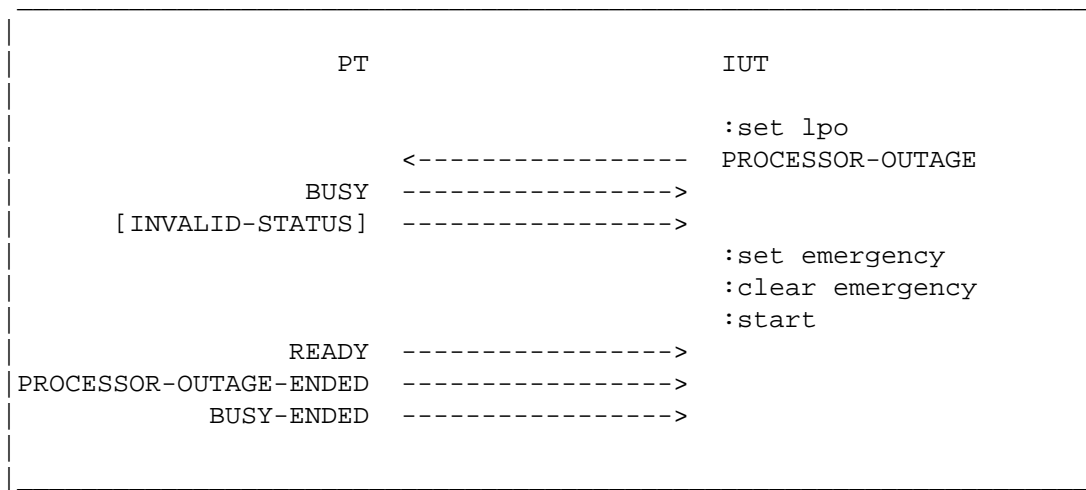


Figure 3.2.8-1. Unexpected events while "processor outage"

Test Description:

- (1) The test begins with both IUT and PT in the "In Service" state.
- (2) The IUT is brought to the "Processor Outage" state using normal procedures.

- (3) A sequence of unexpected M2PA messages are sent to the IUT. These unexpected messages are:
  - Status "Busy"
  - Status Invalid
  - Status "Ready"
  - Status "Processor Outage Ended"
  - Status "Busy Ended"
- (4) A sequence of unexpected Level 3 commands are issued at the IUT. These unexpected Level 3 commands are:
  - Level 3 "Set Emergency" command
  - Level 3 "Clear Emergency" command
  - Level 3 "Start" command
- (5) Check that the IUT ignores the unexpected M2PA messages/Level 3 commands.
- (6) Check that the IUT keeps the link in service and that no local or remote processor outage indications are given to Level 3 at the IUT.


**3.3. Transmission Failure**

This set of test cases validate specific transmission path failures and anomalies. Specifically transmission path failures, corrupt acknowledgments and invalid sequencing. Because SCTP does not have a transmission path that is separate from a receive path, the Q.781 tests that validate response to breaking the transmission path are simulated by aborting the association. Because M2PA does not have forward indicator bits, the Q.781 tests that validate response to abnormal forward indicator bits are simulated by invalid status "In Service" messages.

**3.3.1. Link aligned ready (Abort)**

This case validates the response of the IUT to aborting the SCTP association when the IUT is in the "Aligned Ready" state. The expected sequence of events is illustrated *Figure 3.3.1-1*.

Reference: Q.781/Test 3.1

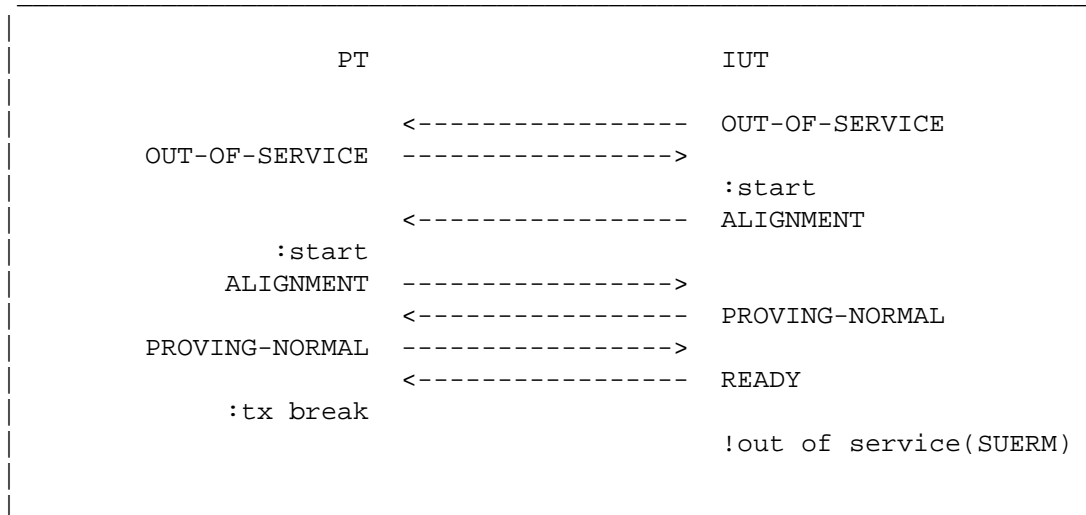

*Figure 3.3.1-1. Link aligned ready (Abort)*


Test Description:

- (1) The test begins with both IUT and PT in the "Out of Service" state.
- (2) Issue a Level 3 "Start" command at the IUT and the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.3.1-1*.
- (4) When the IUT sends a status "Ready" message, abort the SCTP association.
- (5) Check that the IUT indicates "Out of Service" to Level 3 at the IUT with reason "Excessive error rate SUERM" and stays in the "Out of Service" state.

**3.3.2. Link aligned ready (Invalid Acks)**

This test case validates the response of the IUT to receiving two consecutive invalid status "In Service" messages in the "Aligned Ready" state. The expected sequence of events is illustrated *Figure 3.3.2-1*.

Reference: Q.781/Test 3.2

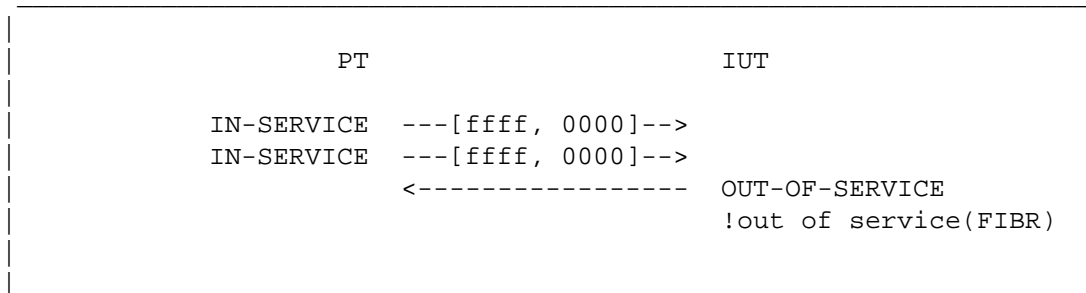

*Figure 3.3.2-1. Link aligned ready (Invalid Acks)*


Test Description:

- (1) The test begins with both IUT and PT in the "Out of Service" state.
- (2) Send two consecutive status "In Service" messages to the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Abnormal FIBR" and stays in the "Out of Service" state.

**3.3.3. Link aligned not ready (Abort)**

This test case validates the response of the IUT to aborting the SCTP association when the IUT is in the "Aligned Not Ready" state. The expected sequence of events is illustrated *Figure 3.3.3-1*.

Reference: Q.781/Test 3.3

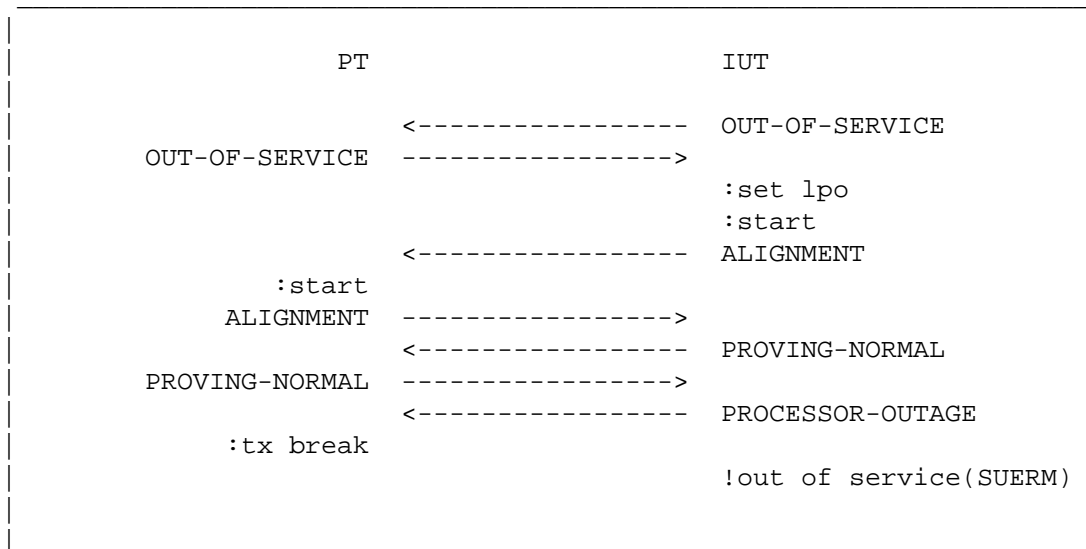

*Figure 3.3.3-1. Link aligned not ready (Abort)*

Test Description:

- (1) The test begins with both PT and IUT in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and the "Start" command at the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.3.3-1*.
- (4) When the IUT sends a status "Processor Outage" message, abort the SCTP association.
- (5) Check that the IUT indicates "Out of Service" to Level 3 at the IUT with reason "Excessive Error Rate/SUERM" and stays in the "Out of Service" state.




**3.3.4. Link aligned not ready (Invalid Acks)**

This test case validates the response of the IUT to the receipt of two consecutive invalid status "In Service" messages in the "Aligned Not Ready" state.

The expected sequence of events is illustrated *Figure 3.3.4-1*.

Reference: Q.781/Test 3.4

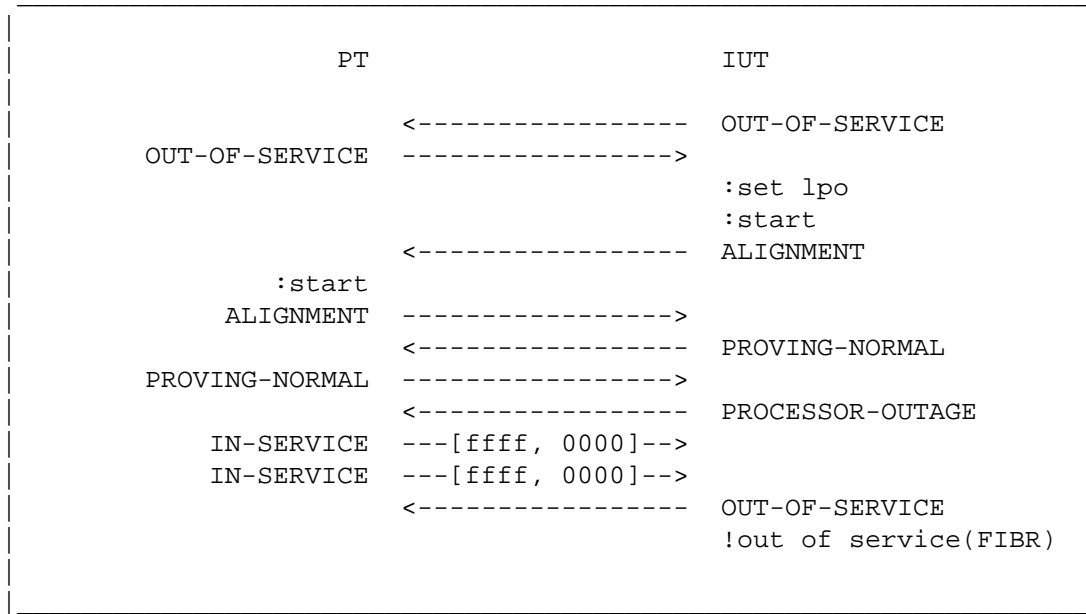

*Figure 3.3.4-1. Link aligned not ready (Invalid Acks)*


Test Description:

- (1) The test begins with both PT and IUT in the "Out of Service" state.
- (2) Issue the Level 3 "Set Local Processor Outage" and "Start" commands at the IUT and the "Start" command at the PT.
- (3) Check that the IUT follows the sequence of events illustrated in *Figure 3.3.4-1*.
- (4) When the IUT sends a status "Processor Outage" message, send two consecutive invalid status "In Service" messages to the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Abnormal FIBR" and remains in the "Out of Service" state.

**3.3.5. Link in service (Abort)**

The expected sequence of events is illustrated *Figure 3.3.5-1*.

Reference: Q.781/Test 3.5

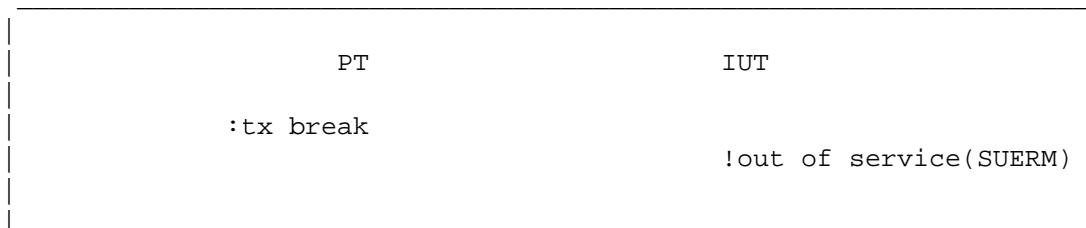

*Figure 3.3.5-1. Link in service (Abort)*


Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Abort the SCTP association.
- (3) Check that the IUT indicates "Out of Service" to Level 3 at the IUT with reason "Excessive Error Rate/SUERM" and stays in the "Out of Service" state.

**3.3.6. Link in service (Invalid Acks)**

This test case validates the response of the IUT to two consecutive invalid status "In Service" messages in the "In Service" state. The expected sequence of events is illustrated *Figure 3.3.6-1*.

Reference: Q.781/Test 3.6

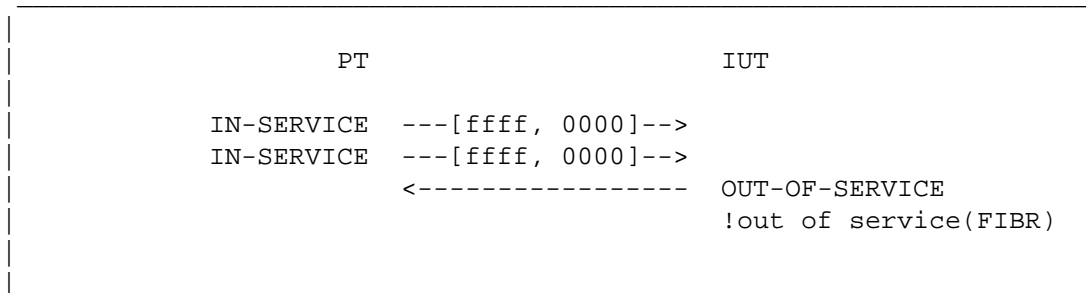

*Figure 3.3.6-1. Link in service (Invalid Acks)*


Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Send two consecutive invalid status "In Service" messages to the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Abnormal FIBR" and stays in the "Out of Service" state.

**3.3.7. Link in processor outage (Abort)**

This test case validates the response of the IUT to aborting the SCTP association when the IUT is in the "Processor Outage" state. The expected sequence of events is illustrated *Figure 3.3.7-1*.

Reference: Q.781/Test 3.7

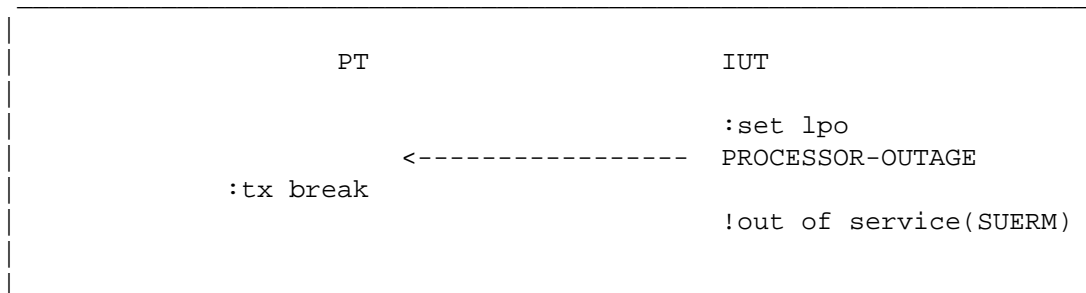

*Figure 3.3.7-1. Link in processor outage (Abort)*

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issues the Level 3 "Set Local Processor Outage" command at the IUT.
- (3) Check that the IUT sends a status "Processor Outage" message.
- (4) Abort the SCTP association.
- (5) Check that the IUT indicates "Out of Service" to Level 3 at the IUT with reason "Excessive Error Rate/SUERM" and stays in the "Out of Service" state.

**3.3.8. Link in processor outage (Invalid Acks)**

This test case validates the response of the IUT to receiving two consecutive Invalid status "In Service" messages while in the "Processor Outage" state. The expected sequence of events is illustrated *Figure 3.3.8-1*.

Reference: Q.781/Test 3.8

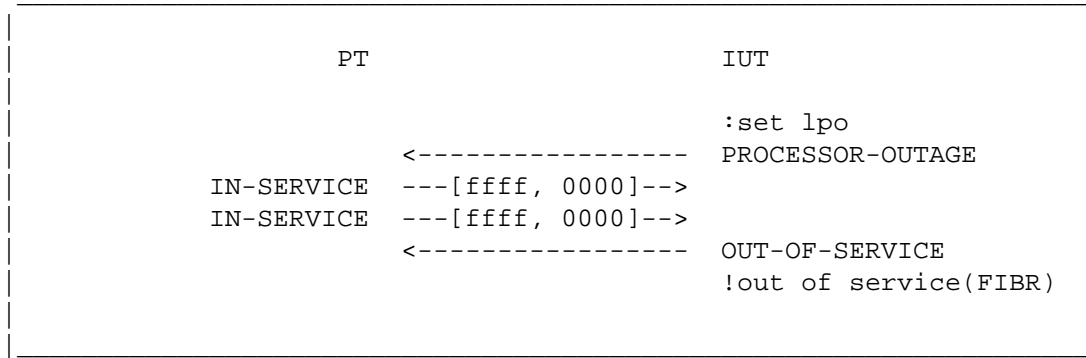


Figure 3.3.8-1. Link in processor outage (Invalid Acks)

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issues a Level 3 "Set Local Processor Outage" command at the IUT.
- (3) Check that the IUT sends a status "Processor Outage" message.
- (4) Send two consecutive invalid status "In Service" messages to the IUT.
- (5) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "Abnormal FIBR" and stays in the "Out of Service" state.

### 3.4. Processor Outage Control

#### 3.4.1. Set and clear LPO while link in service

This test case validates the response of the IUT to a local processor outage condition and recovery with buffer clearing. The expected sequence of events is illustrated *Figure 3.4.1-1*.

Reference: Q.781/Test 4.1

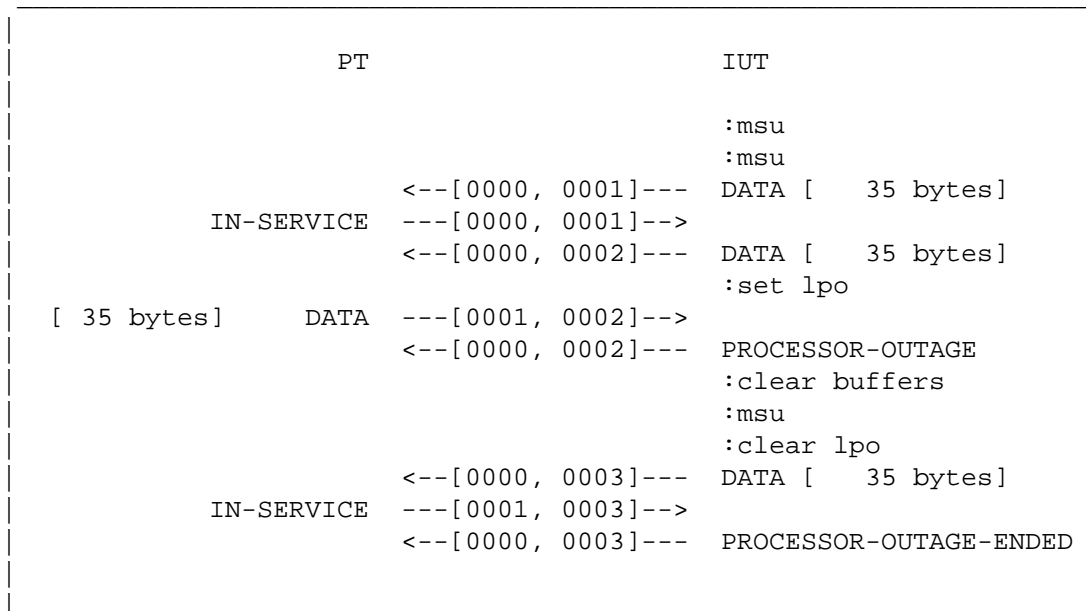


Figure 3.4.1-1. Set and clear LPO while link in service

Test Description:


- (1) The test begins with the link in the "In Service" state.
- (2) Send two MSUs from the IUT and then issue a Level 3 "Set Local Processor Outage" command at the IUT.

- (3) Check that the IUT sends two Data messages and a status "Processor Outage" message.
- (4) Acknowledge one data message with a status "In Service" message at the PT and send a Data message from the PT to the IUT.
- (5) Check that the IUT sends a status "Processor Outage" message.
- (6) Check that the IUT does not require an acknowledgments to the second Data message by waiting longer than timer T7 at the IUT.
- (7) At the IUT, issue a Level 3 "Clear Buffers" command, send an MSU, and then issue a Level 3 "Clear Local Processor Outage".
- (8) Check that the IUT sends a Data message and send a status "In Service" message to the IUT in response. Check that the IUT sends a "Processor Outage Ended" message.
- (9) To ensure that the IUT is not expecting another acknowledgments, wait for longer than T7 and check that the IUT sends no further status messages and remains in the "In Service" state.

**3.4.2. RPO during LPO**

This test case validates the response of the IUT to receiving a status "Processor Outage" message and status "Processor Outage Ended" message while in the "Processor Outage" state with LPO set at the IUT. The expected sequence of events is illustrated *Figure 3.4.2-1*.

Reference: Q.781/Test 4.2

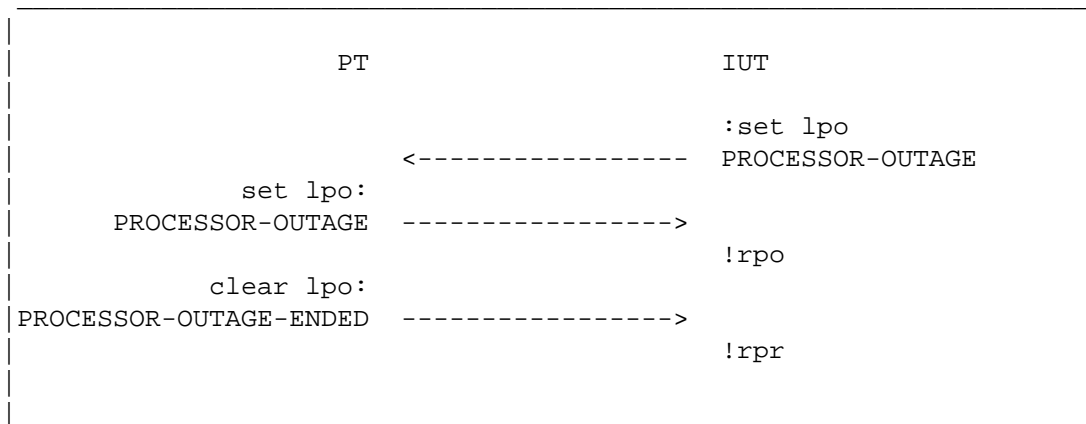

*Figure 3.4.2-1. RPO during LPO*

**Test Description:**

- (1) The test begins with the link in the "In Service" state.
- (2) Issue a Level 3 "Set Local Processor Outage" command at the IUT.
- (3) Check that the IUT sends a status "Processor Outage" message.
- (4) Issue a Level 3 "Set Local Processor Outage" command at the PT and send a status "Processor Outage" message to the IUT.
- (5) Check that the IUT indicates "Remote Processor Outage" to Level 3 at the IUT.
- (6) Issue a level 3 "Clear Local Processor Outage" command at the PT and send a status "Processor Outage Ended" message to the IUT.
- (7) Check that the IUT indicates "Remote Processor Recovered" to Level 3 at the IUT.

**3.4.3. Clear LPO when "Both processor outage"**

This test case validates the response of the IUT to the receipt of a Level 3 "Clear Local Processor Outage" command when the IUT is in the "Processor Outage" state with both processors marked PO. The expected sequence of events is illustrated *Figure 3.4.3-1*.

Reference: Q.781/Test 4.3

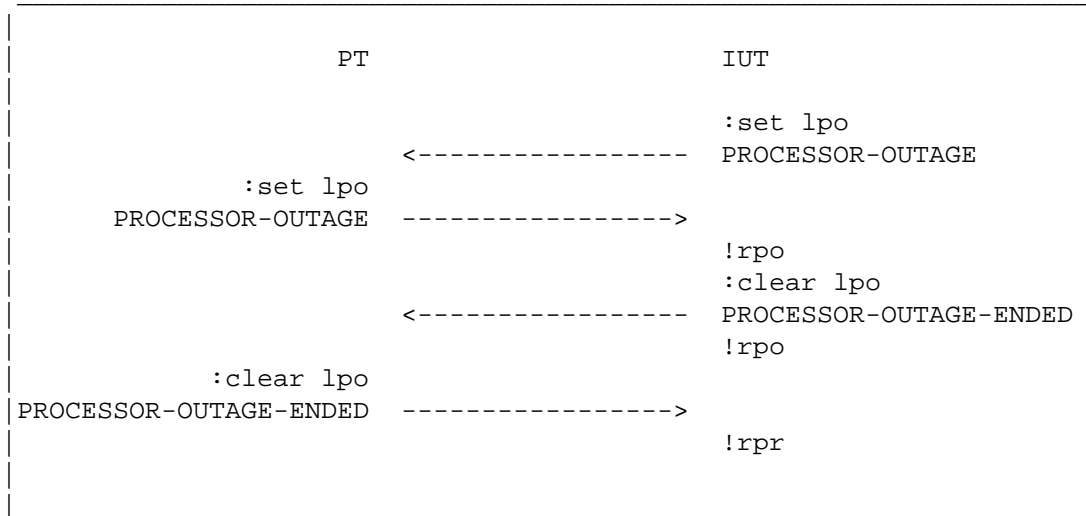


Figure 3.4.3-1. Clear LPO when "Both processor outage"

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Issue a Level 3 "Set Local Processor Outage" command at the IUT.
- (3) Check that the IUT sends a status "Processor Outage" message.
- (4) Issue a Level 3 "Set Local Processor Outage" command at the PT and send a status "Processor Outage" message to the IUT.
- (5) Check that the ITU indicates "Remote Processor Outage" to Level 3 at the IUT.
- (6) Issue a Level 3 "Clear Local Processor Outage" command at the IUT.
- (7) Check that the IUT sends a status "Processor Ended" message.
- (8) Issue a Level 3 "Clear Local Processor Outage" command at the PT and send a status "Processor Outage Ended" message to the IUT.
- (9) Check that the IUT indicates "Remote Processor Recovered" to Level 3 at the IUT and remains in the "In Service" state.

**3.5. SU delimitation, alignment, error detection and correction**

Most of the test cases in this section are not applicable to M2PA operation.

**3.5.1. More than 7 ones between MSU opening and closing flags**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.5.1-1*.

Reference: Q.781/Test 5.1

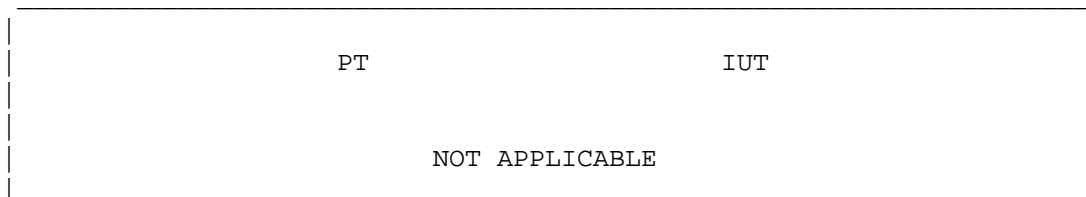


Figure 3.5.1-1. Not applicable


Test Description:

- (1) Not applicable.

**3.5.2. Greater than maximum signal unit length**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.5.2-1*.

Reference: Q.781/Test 5.2

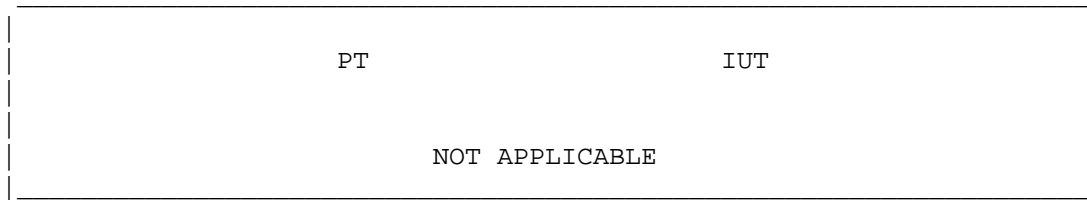

*Figure 3.5.2-1. Not applicable*


Test Description:

- (1) Not applicable.

**3.5.3. Below minimum signal unit length**

This test case validates the IUT response to a Data message with a payload below the minimum MSU length. The expected sequence of events is illustrated *Figure 3.5.3-1*.

Reference: Q.781/Test 5.3

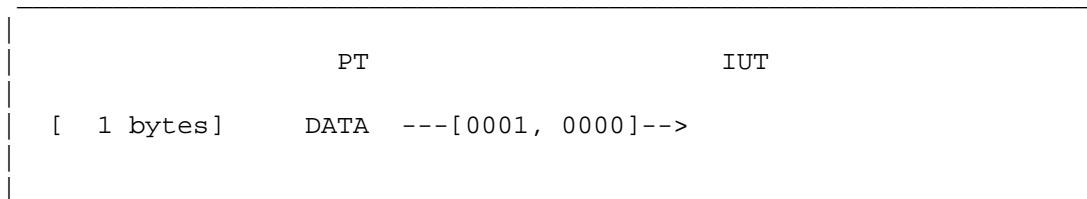

*Figure 3.5.3-1. Below minimum signal unit length*


Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Send a Data message with one byte of payload to the IUT.
- (3) Check that the IUT does not acknowledge the Data message and remains in the "In Service" state.

**3.5.4. Reception of single and multiple flags between FISUs**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.5.4-1*.

Reference: Q.781/Test 5.4(a)

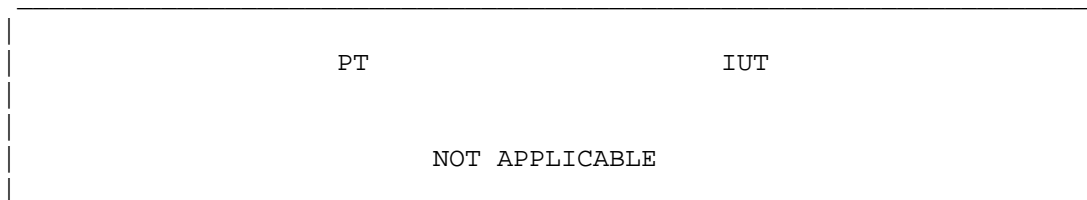

*Figure 3.5.4-1. Not applicable*

Test Description:

- (1) Not applicable.

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.5.4-2*.

Reference: Q.781/Test 5.4(b)

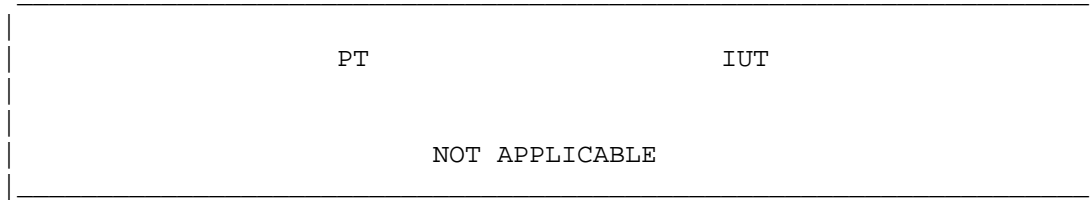


Figure 3.5.4-2. Not applicable

Test Description:

- (1) Not applicable.

**3.5.5. Reception of single and multiple flags between MSUs**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.5.5-1*.

Reference: Q.781/Test 5.5(a)

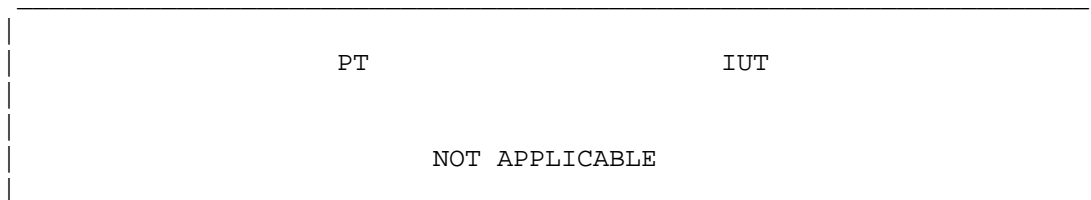


Figure 3.5.5-1. Not applicable

Test Description:

- (1) Not applicable.

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.5.5-2*.

Reference: Q.781/Test 5.5(b)

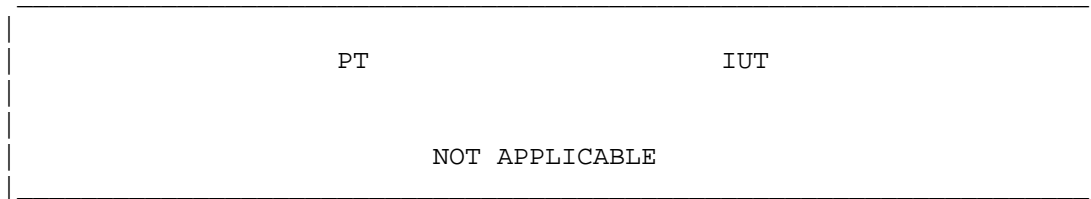


Figure 3.5.5-2. Not applicable

Test Description:

- (1) Not applicable.


**3.6. SUERM check**

The test cases in this section are not applicable to M2PA. These tests might have corresponding tests at the SCTP layer, however, that is the topic of an SCTP test specification rather than an M2PA test specification.

**3.6.1. Error rate of 1 in 256 - Link remains in service**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.6.1-1*.

Reference: Q.781/Test 6.1

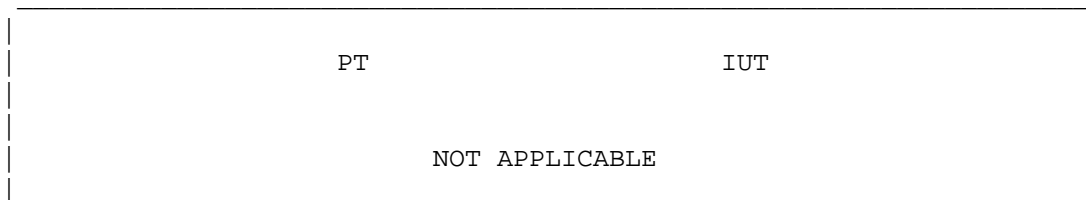
*Figure 3.6.1-1. Not applicable*

Test Description:

- (1) Not applicable.

**3.6.2. Error rate of 1 in 254 - Link out of service**This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.6.2-1*.

Reference: Q.781/Test 6.2

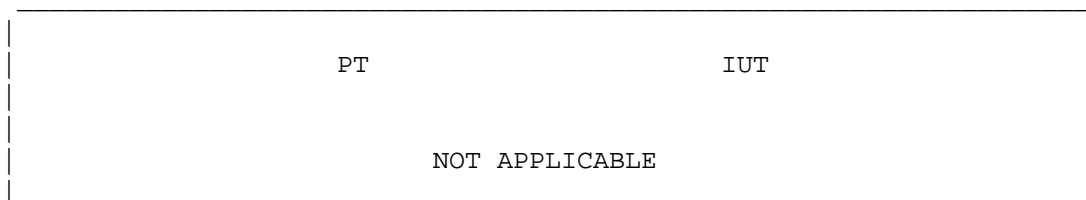
*Figure 3.6.2-1. Not applicable*

Test Description:

- (1) Not applicable.

**3.6.3. Consecutive corrupt SUs**This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.6.3-1*.

Reference: Q.781/Test 6.3

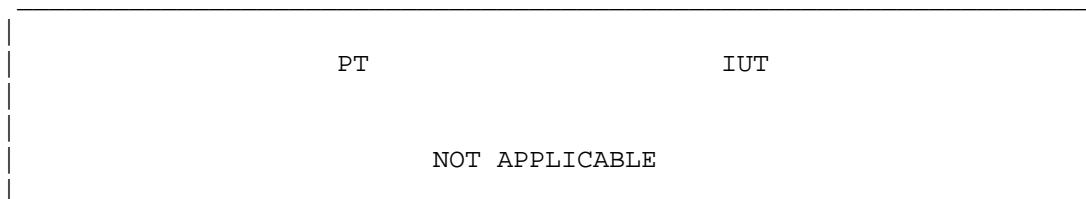
*Figure 3.6.3-1. Not applicable*

Test Description:

- (1) Not applicable.

**3.6.4. Time controlled break of the link**This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.6.4-1*.

Reference: Q.781/Test 6.4

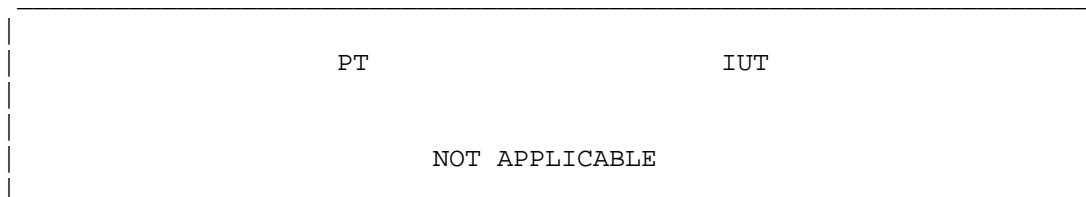*Figure 3.6.4-1. Not applicable*



Test Description:

- (1) Not applicable.


**3.7. AERM check**

The test cases in this section are not applicable to M2PA. These test might have corresponding test at the SCTP layer, however, that is the topic of an SCTP test specification rather than an M2PA test specification.

**3.7.1. Error rate below the normal threshold**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.7.1-1*.

Reference: Q.781/Test 7.1

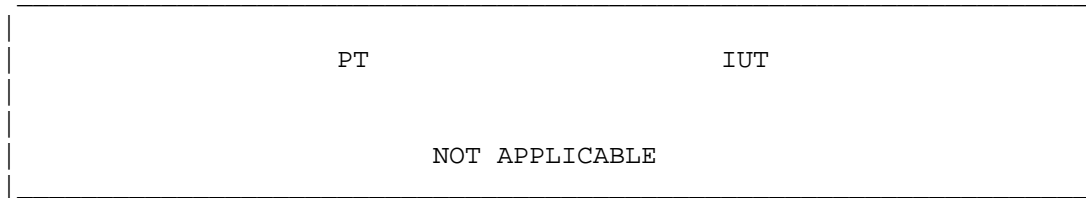

*Figure 3.7.1-1. Not applicable*


Test Description:

- (1) Not applicable.

**3.7.2. Error rate at the normal threshold**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.7.2-1*.

Reference: Q.781/Test 7.2

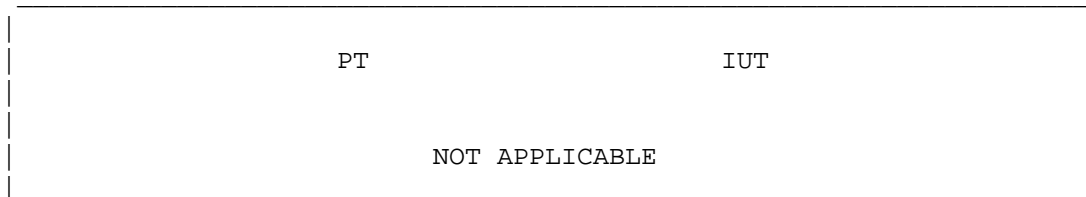

*Figure 3.7.2-1. Not applicable*


Test Description:

- (1) Not applicable.

**3.7.3. Error rate above the normal threshold**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.7.3-1*.

Reference: Q.781/Test 7.3

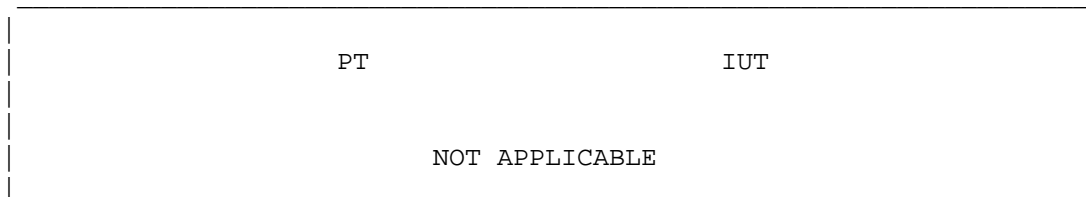

*Figure 3.7.3-1. Not applicable*

Test Description:

- (1) Not applicable.

**3.7.4. Error rate at the emergency threshold**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.7.4-1*.

Reference: Q.781/Test 7.4

PT	IUT
NOT APPLICABLE	

Figure 3.7.4-1. Not applicable

Test Description:

- (1) Not applicable.

### 3.8. Transmission and reception control (Basic)

A number of test cases in this section are not applicable to M2PA. Some may be the topic of a test specification for SCTP but are not applicable to M2PA. Test cases that are applicable in this section validate the basic transmission, reception and acknowledgments of Data messages with status "In Service" messages.

#### 3.8.1. Data transmission and reception

This test case validates the IUT response to the sending and receipt of Data and status "In Service" messages. The expected sequence of events is illustrated *Figure 3.8.1-1*.

Reference: Q.781/Test 8.1

PT	IUT
[ 35 bytes] DATA	---[0001, 0000]-->
	<--[0001, 0000]---
	IN-SERVICE
	!msu
	:msu
	<--[0001, 0001]---
IN-SERVICE	---[0001, 0001]-->
	DATA [ 35 bytes]

Figure 3.8.1-1. Data transmission and reception

Test Description:

- (1) This test begins with the link in the "In Service" state.
- (2) Send a Data message to the IUT.
- (3) Check that the IUT sends a status "In Service" message acknowledging the received Data message and delivers the received MSU to Level 3 at the IUT.
- (4) Issue a Level 3 MSU to the IUT.
- (5) Check that the IUT sends a Data message.
- (6) Send a status "In Service" message to the IUT acknowledging the data message.
- (7) Check that the IUT receives the acknowledgments by waiting longer than time T7 and ensuring that the IUT stays in the "In Service" state.

#### 3.8.2. Negative acknowledgments of an MSU

M2PA does not perform negative acknowledgments at the M2PA layer. Negative acknowledgments are performed as necessary by the underlying SCTP transport. As such, test cases involving negative acknowledgments are not applicable.

The expected sequence of events is illustrated *Figure 3.8.2-1*.

Reference: Q.781/Test 8.2

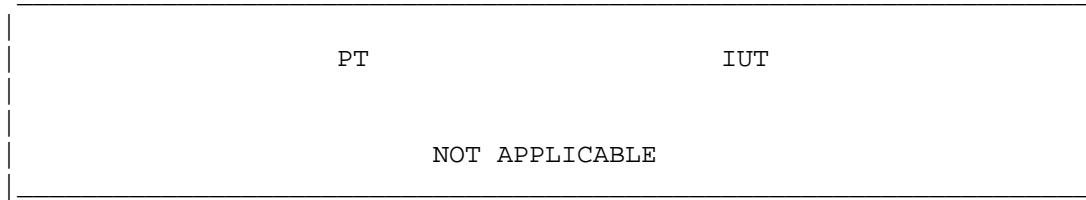


Figure 3.8.2-1. Not Applicable

Test Description:

- (1) Not applicable.

### 3.8.3. Check RTB full

This test case validates the IUT response to an RTB full condition at the IUT. The expected sequence of events is illustrated Figure 3.8.3-1.

Reference: Q.781/Test 8.3

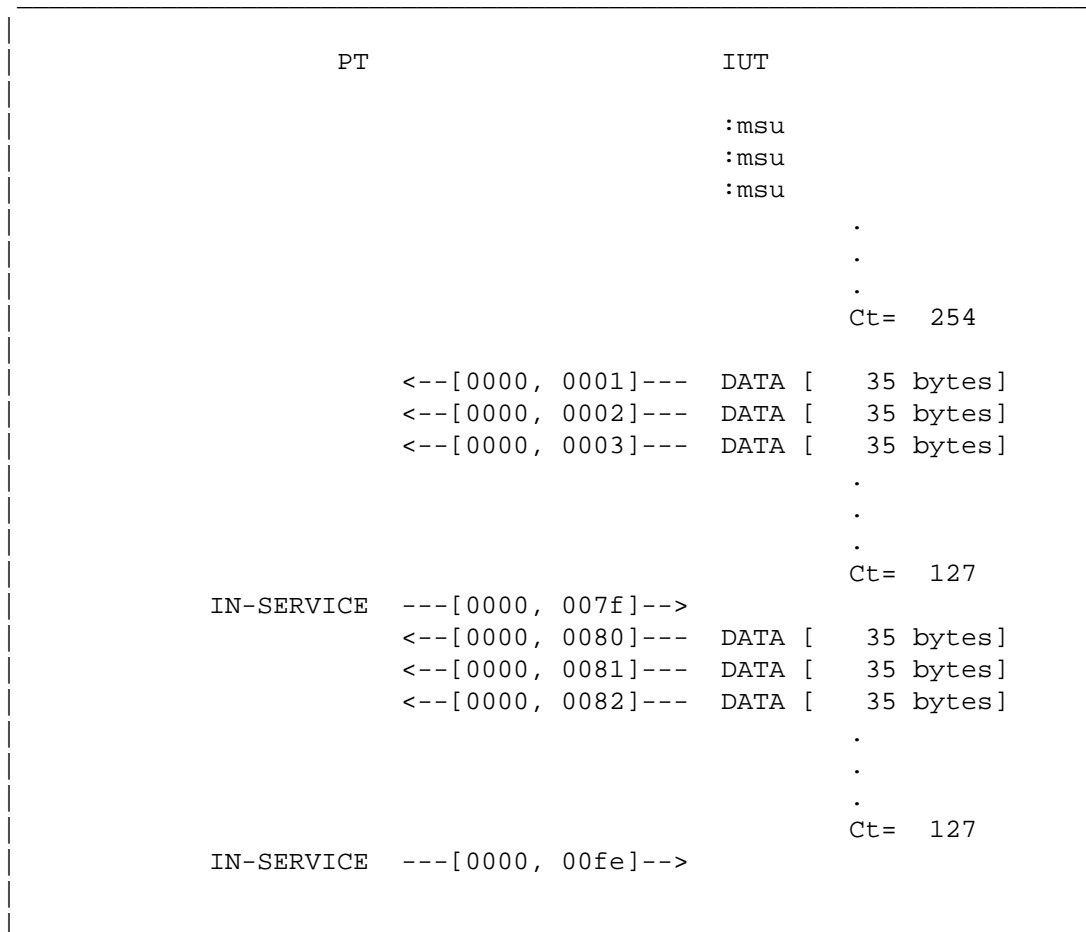


Figure 3.8.3-1. Check RTB full

Test Description:


- (1) This test begins with the link in the "In Service" state.
- (2) Send 2 x N2 MSUs at the IUT.
- (3) Check that the IUT sends N2 Data messages and then stops sending Data messages (RTB Full condition).
- (4) Acknowledge the N2 Data messages in a single status "In Service" message.
- (5) Check that the IUT sends another N2 Data messages.

- (6) Acknowledge the N2 Data messages in a single status "In Service" message.
- (7) Check that the IUT remains in the "In Service" state longer than time T7.

**3.8.4. Single invalid Ack**

This test case validates the response of the IUT to a single invalid status "In Service" message. The expected sequence of events is illustrated *Figure 3.8.4-1*.

Reference: Q.781/Test 8.4

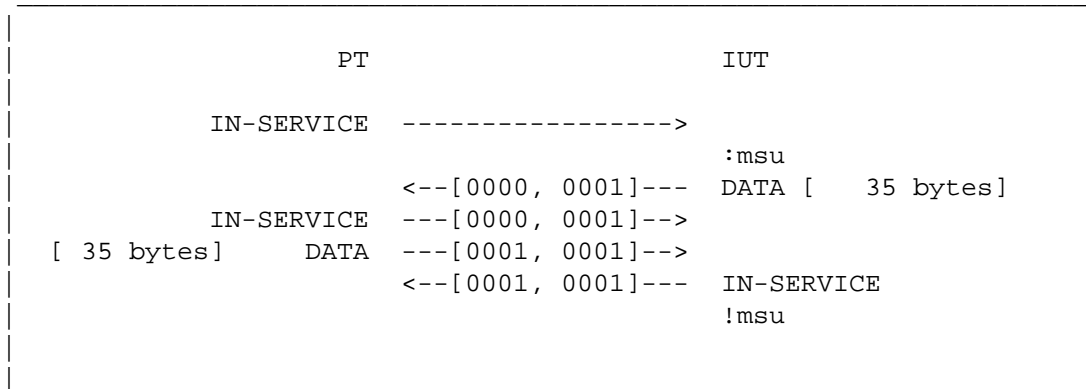

*Figure 3.8.4-1. Single invalid Ack*


Test Description:

- (1) This test begins with the link in the "In Service" state.
- (2) Send an invalid status "In Service" message to the IUT.
- (3) Send an MSU at the IUT.
- (4) Check that the IUT sends a Data message.
- (5) Acknowledge the Data message with a status "In Service" message to the IUT
- (6) Send an Data message to the IUT.
- (7) Check that the IUT acknowledges the Data message with a status "In Service" message and delivers an MSU to Level 3 at the IUT.

**3.8.5. Duplicated FSN**

This test validates the response of the IUT to a single Data message which has a repeated Forward Sequence Number. The expected sequence of events is illustrated *Figure 3.8.5-1*.

Reference: Q.781/Test 8.5

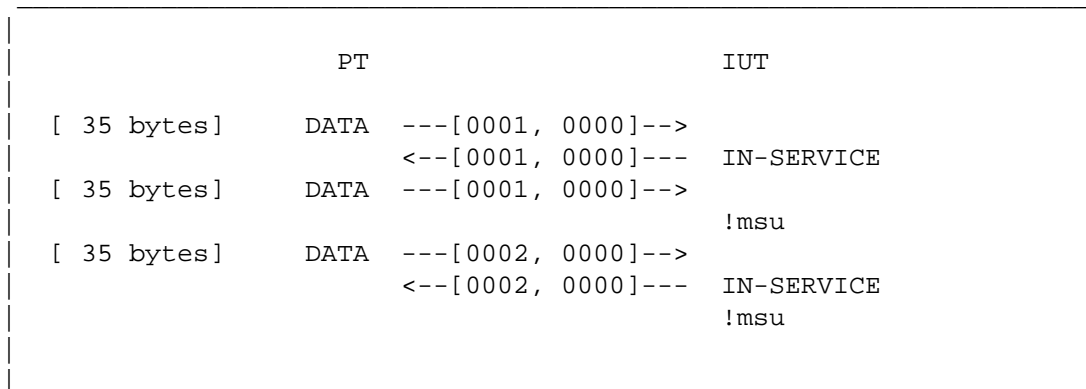

*Figure 3.8.5-1. Duplicated FSN*

Test Description:


- (1) This test begins with the link in the "In Service" state.

- (2) Send an valid Data message to the IUT.
- (3) Check that the IUT acknowledges the Data message and delivers an M3U to Level 3 at the IUT.
- (4) Send an invalid Data message that contains the same FSN as the previous Data message to the IUT.
- (5) Check that the IUT does not deliver an MSU to Level 3 at the IUT.
- (6) Send a valid Data message to the IUT.
- (7) Check that the IUT acknowledges the Data message and delivers an M3U to Level 3 at the IUT.
- (8) Check that the IUT maintains the "In Service" state.

**3.8.6. Erroneous retransmission - Single MSU**

Retransmission of DATA messages is performed by SCTP for M2PA and as such the related Q.781 tests are not applicable. The expected sequence of events is illustrated *Figure 3.8.6-1*.

Reference: Q.781/Test 8.6

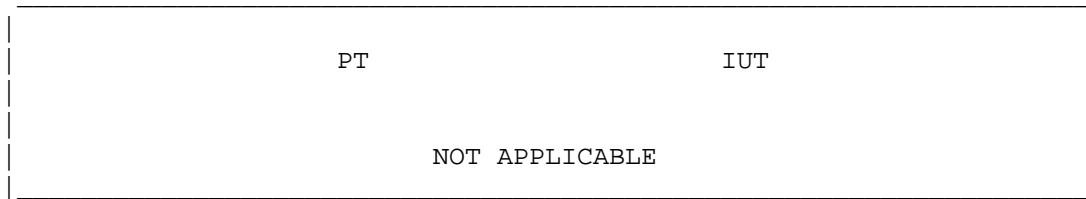

*Figure 3.8.6-1. Not Applicable*


Test Description:

- (1) Not applicable.

**3.8.7. Erroneous retransmission - Multiple FISUs**

Retransmission of DATA messages is performed by SCTP for M2PA and as such the related Q.781 tests are not applicable. The expected sequence of events is illustrated *Figure 3.8.7-1*.

Reference: Q.781/Test 8.7

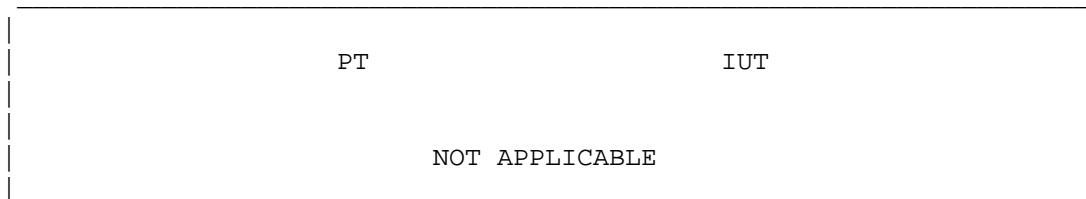

*Figure 3.8.7-1. Not Applicable*


Test Description:

- (1) Not applicable.

**3.8.8. Single FISU with corrupt FIB**

The expected sequence of events is illustrated *Figure 3.8.8-1*.

Reference: Q.781/Test 8.8

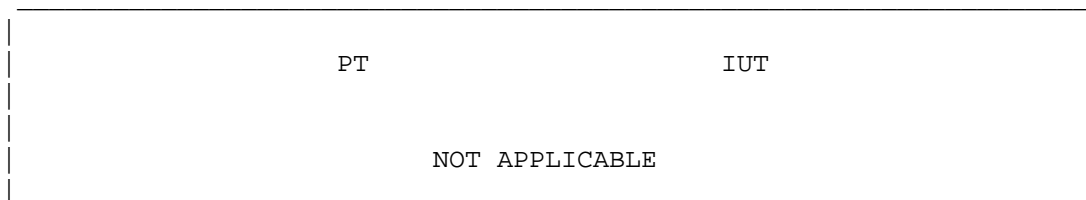

*Figure 3.8.8-1. Not Applicable*


Test Description:

- (1) Not applicable.

**3.8.9. In Service prior to RPO being set**

The expected sequence of events is illustrated *Figure 3.8.9-1*.

Reference: Q.781/Test 8.9

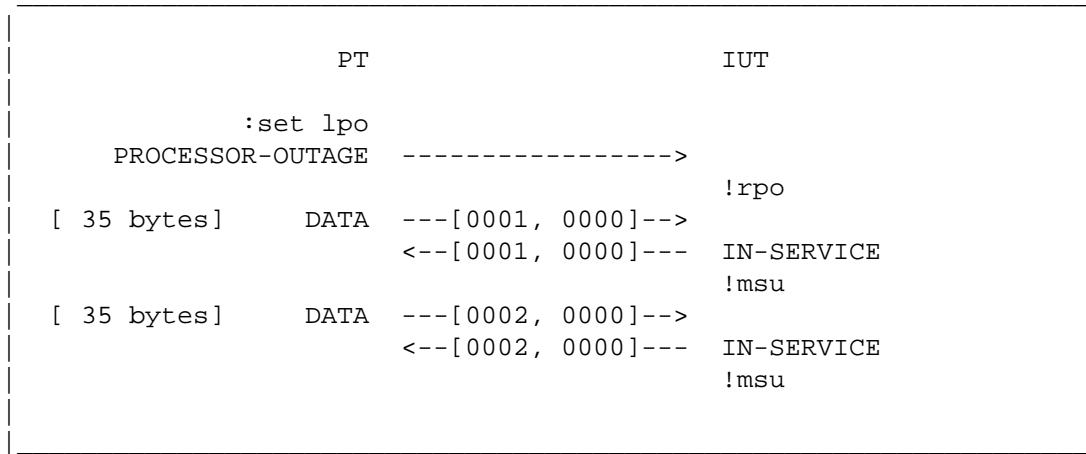

*Figure 3.8.9-1. In service prior to RPO being set*

Test Description:


- (1) The test begins with the link in the "In Service" state.
- (2) Issue a Level 3 "Set Local Processor Outage" command at the PT and send a status "Processor Outage" message to the IUT.
- (3) Check that the IUT indicates "Remote Processor Outage" to Level 3 at the IUT.
- (4) Send two consecutive Data messages to the IUT.
- (5) Check that the IUT acknowledges both Data messages with a status "In Service" and that two MSUs are delivered to Level 3 at the IUT.

**3.8.10. Abnormal BSN - single Data message**

This test validates the behavior of the IUT to receiving a single abnormal Backward Sequence Number in a Data message.

The expected sequence of events is illustrated *Figure 3.8.10-1*.

Reference: Q.781/Test 8.10

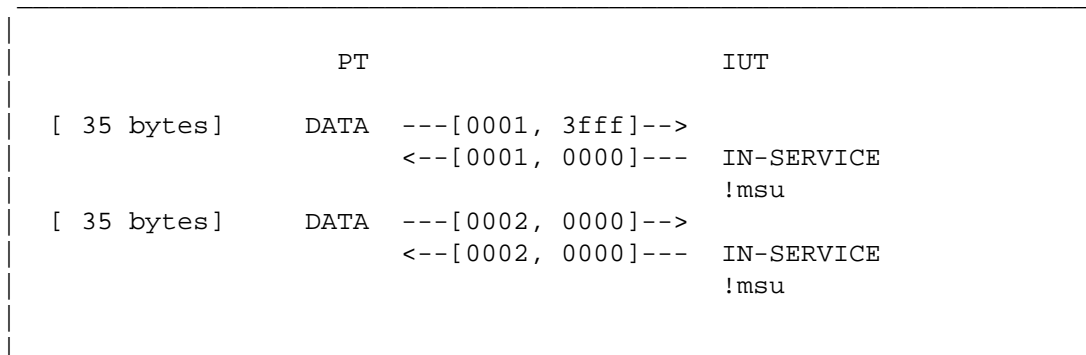

*Figure 3.8.10-1. Abnormal BSN - single Data message*

Test Description:


- (1) The test begins with the link in the "In Service" state.
- (2) Send a Data message to the IUT with an abnormal Backwards Sequence Number.
- (3) Check that the IUT acknowledges the Data message delivers an MSU to Level 3 at the IUT.

- (4) Send a Data message to the IUT with an normal Backwards Sequence Number.
- (5) Check that the IUT acknowledges the Data message delivers an MSU to Level 3 at the IUT.
- (6) Check that the IUT maintains the "In Service" state.

**3.8.11. Abnormal BSN - two consecutive messages**

This test validates the reponse of the IUT to receiving two consecutive abnormal Backward Sequence Numbers. The expected sequence of events is illustrated *Figure 3.8.11-1*.

Reference: Q.781/Test 8.11

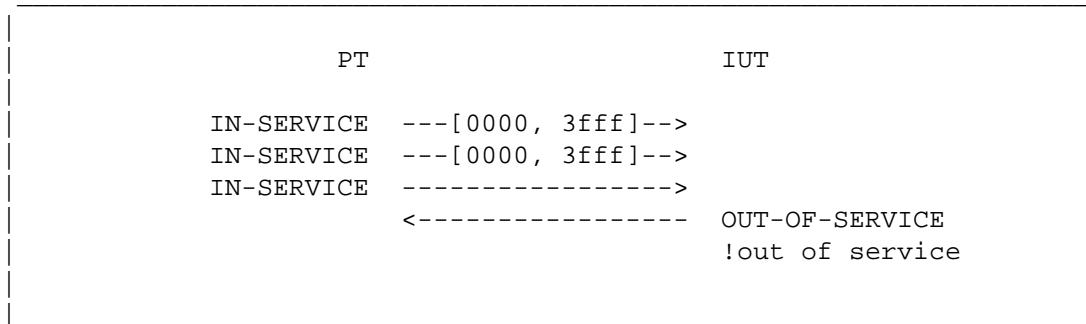

*Figure 3.8.11-1. Abnormal BSN - two consecutive messages*


Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Send two status "In Service" messages with an abnormal Backward Sequence Number.
- (3) Send a status "In Service" message with an normal Backward Sequence Number.
- (4) Check that the IUT responds with a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT.

**3.8.12. Excessive delay of acknowledgments**

This test case validates the IUT response to a excessively delayed acknowledgment. The expected sequence of events is illustrated *Figure 3.8.12-1*.

Reference: Q.781/Test 8.12

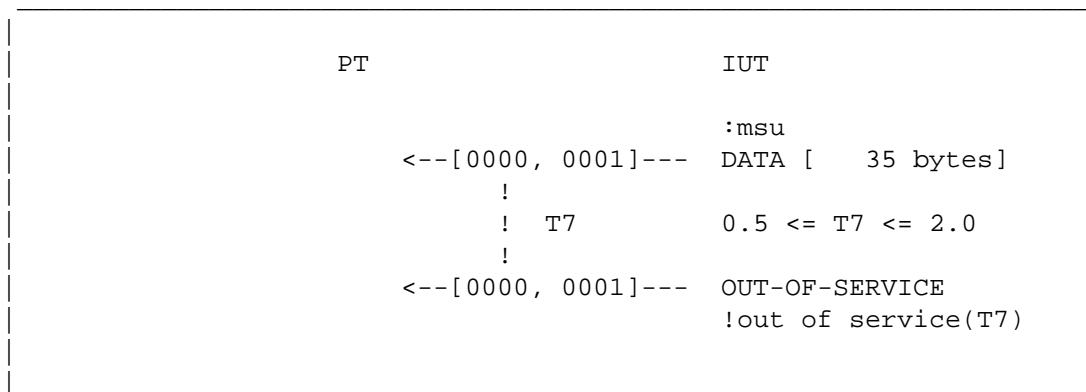

*Figure 3.8.12-1. Excessive delay of acknowledgments*


Test Description:

- (1) This test case begins with the link in the "In Service" state.
- (2) Send an MSU from the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 at the IUT with reason "T7 Timeout" and that the link remains in the "Out of Service" state.
- (4) Check that the T7 is between 0.5 seconds and 2.0 seconds in duration.

**3.8.13. Level 3 Stop command**

This test case validates the response of the IUT to the Level 3 "Stop" command while in the "In Service" state. The expected sequence of events is illustrated *Figure 3.8.13-1*.

Reference: Q.781/Test 8.13

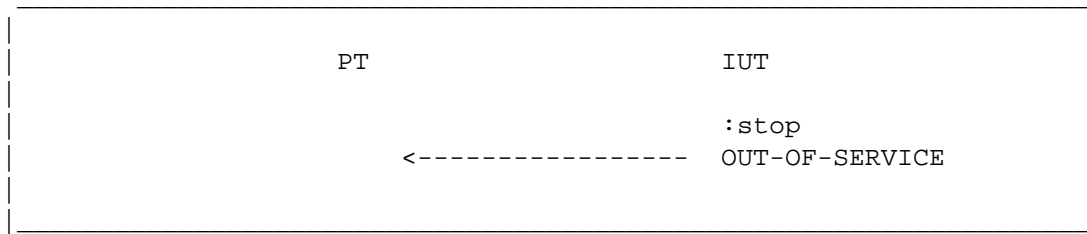

*Figure 3.8.13-1. Level 3 Stop command*

Test Description:

- (1) This test begins with the link in the "In Service" state.
- (2) Issue the Level 3 "Stop" command at the IUT.
- (3) Check that the IUT sends a status "Out of Service" message and remains in the "Out of Service" state.


**3.9. Transmission and Reception Control (PCR)**

M2PA does not perform Preventative Cyclic Retranmission and, therefore, the test cases in this section are not applicable to M2PA.

**3.9.1. MSU transmission and reception**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.1-1*.

Reference: Q.781/Test 9.1

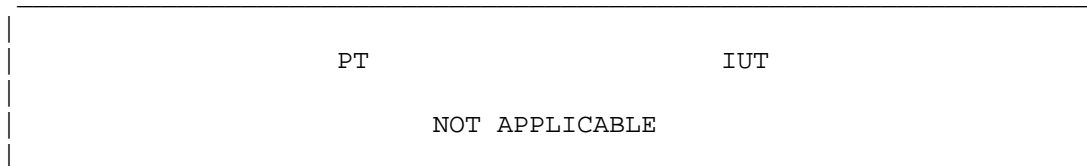

*Figure 3.9.1-1. Not Applicable*


Test Description:

- (1) Not applicable.

**3.9.2. Priority control**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.2-1*.

Reference: Q.781/Test 9.2

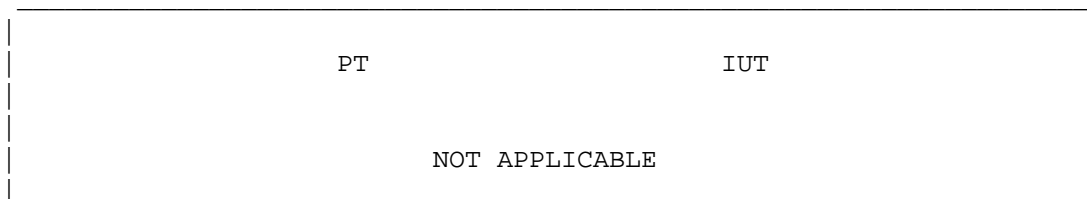

*Figure 3.9.2-1. Not Applicable*

Test Description:


- (1) Not applicable.



**3.9.3. Forced retransmission with the value N1**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.3-1*.

Reference: Q.781/Test 9.3

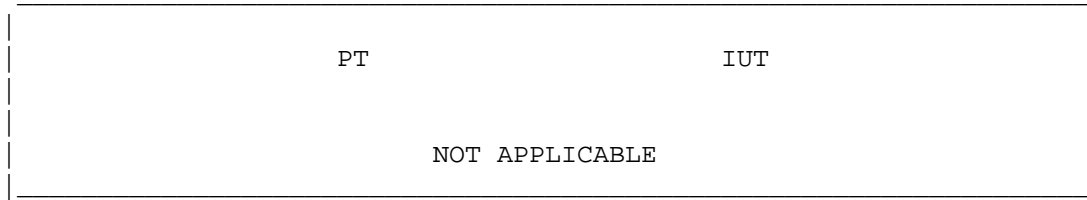

*Figure 3.9.3-1. Not Applicable*


Test Description:

- (1) Not applicable.

**3.9.4. Forced retransmission with the value N2**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.4-1*.

Reference: Q.781/Test 9.4

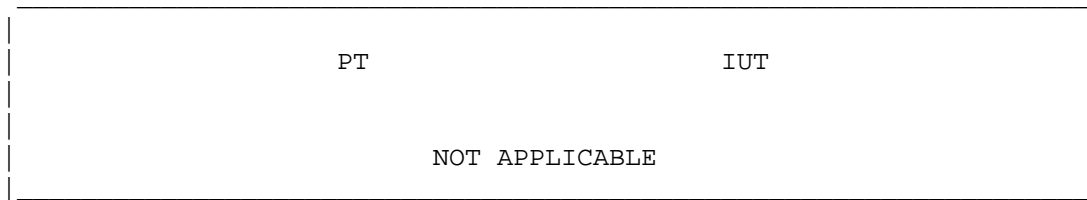

*Figure 3.9.4-1. Not Applicable*


Test Description:

- (1) Not applicable.

**3.9.5. Forced retransmission cancel**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.5-1*.

Reference: Q.781/Test 9.5

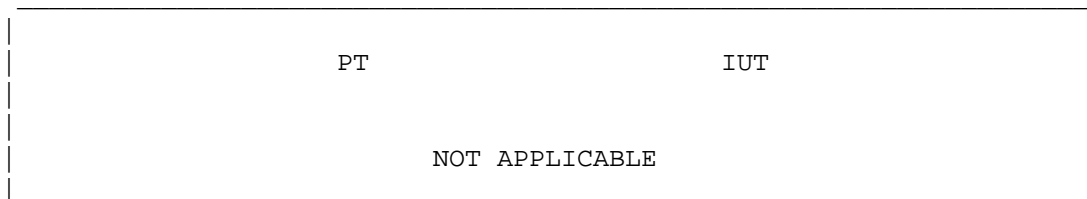

*Figure 3.9.5-1. Not Applicable*

Test Description:

- (1) Not applicable.

**3.9.6. Reception of forced retransmission**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.6-1*.

Reference: Q.781/Test 9.6

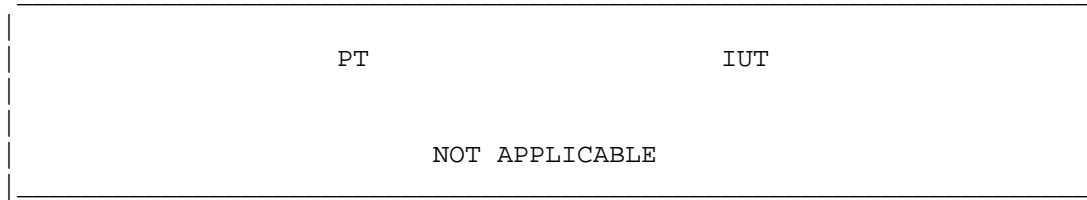


Figure 3.9.6-1. Not Applicable

Test Description:

- (1) Not applicable.

**3.9.7. MSU transmission while RPO set**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.7-1*.

Reference: Q.781/Test 9.7

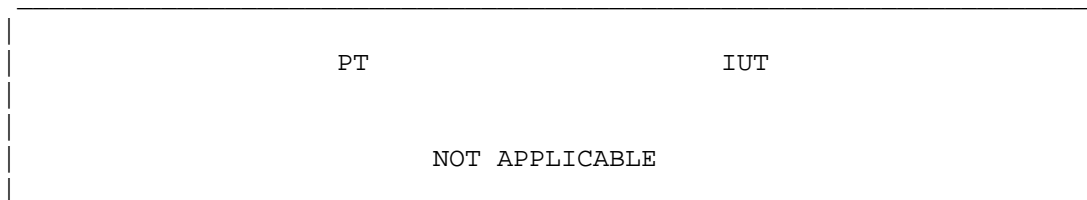


Figure 3.9.7-1. Not Applicable

Test Description:

- (1) Not applicable.

**3.9.8. Abnormal BSN - Single MSU**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.8-1*.

Reference: Q.781/Test 9.8

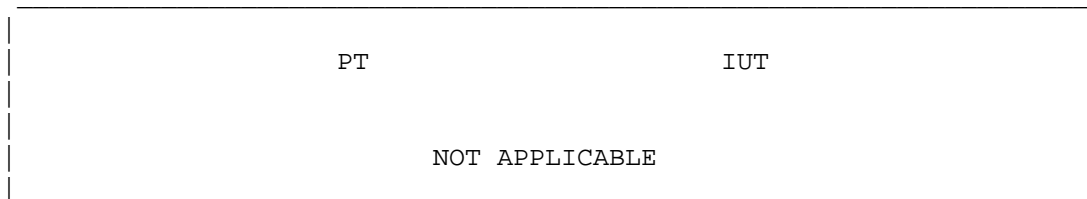


Figure 3.9.8-1. Not Applicable

Test Description:

- (1) Not applicable.

**3.9.9. Abnormal BSN - Two MSUs**

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.9-1*.

Reference: Q.781/Test 9.9

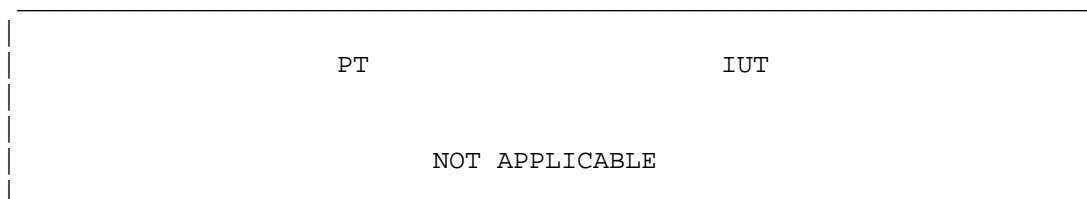


Figure 3.9.9-1. Not Applicable


Test Description:

- (1) Not applicable.

### 3.9.10. Unexpected FSN

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.10-1*.

Reference: Q.781/Test 9.10

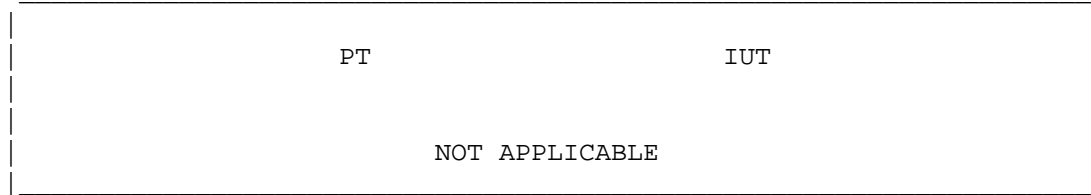

*Figure 3.9.10-1. Not Applicable*


Test Description:

- (1) Not applicable.

### 3.9.11. Excessive delay of acknowledgments

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.11-1*.

Reference: Q.781/Test 9.11

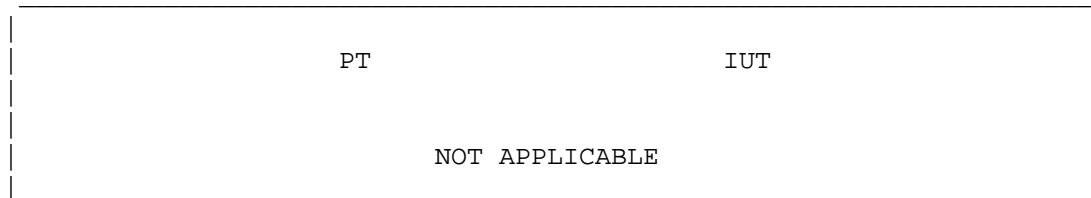

*Figure 3.9.11-1. Not Applicable*


Test Description:

- (1) Not applicable.

### 3.9.12. FISU with FSN expected for MSU

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.12-1*.

Reference: Q.781/Test 9.12

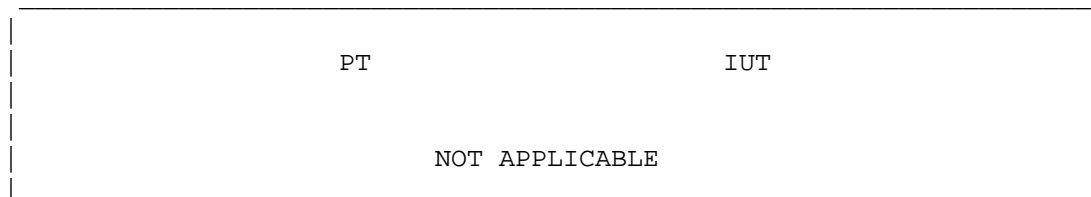

*Figure 3.9.12-1. Not Applicable*

Test Description:

- (1) Not applicable.

### 3.9.13. Level 3 Stop command

This test case is not applicable to M2PA. The expected sequence of events is illustrated *Figure 3.9.13-1*.

Reference: Q.781/Test 9.13

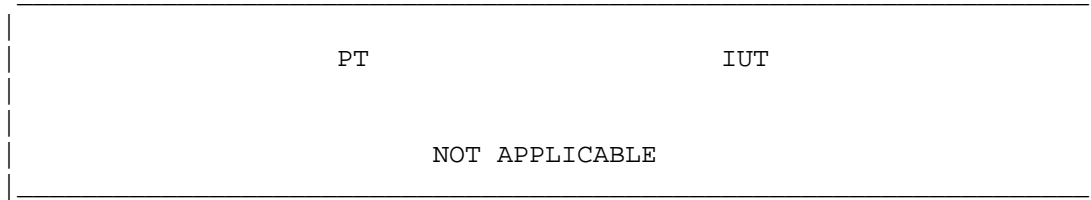


Figure 3.9.13-1. Not Applicable

Test Description:

- (1) Not applicable.

### 3.10. Congestion Control

#### 3.10.1. Congestion abatement

This test case validates the response of the IUT to the Level 3 "Congestion" and "Congestion Ceases" conditions. The expected sequence of events is illustrated *Figure 3.10.1-1*.

Reference: Q.781/Test 10.1

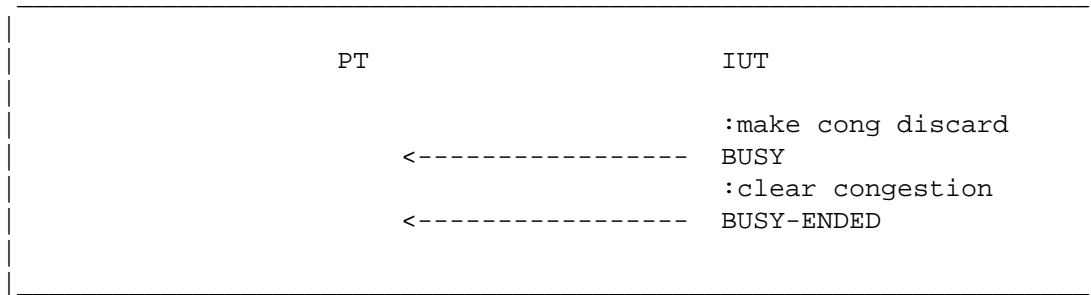


Figure 3.10.1-1. Congestion abatement

Test Description:

- (1) This test begins with the link in the "In Service" state.
- (2) Generate a local Level 3 "Congestion" condition at the IUT.
- (3) Check that the IUT sends a status "Busy" message.
- (4) Generate a local Level 3 "Congestion Ceases" condition at the IUT.
- (5) Check that the IUT sends a status "Busy Ended" message.

#### 3.10.2. Timer T7

This test case validates timer T7 and procedures at the ITU. The expected sequence of events is illustrated *Figure 3.10.2-1*.

Reference: Q.781/Test 10.2

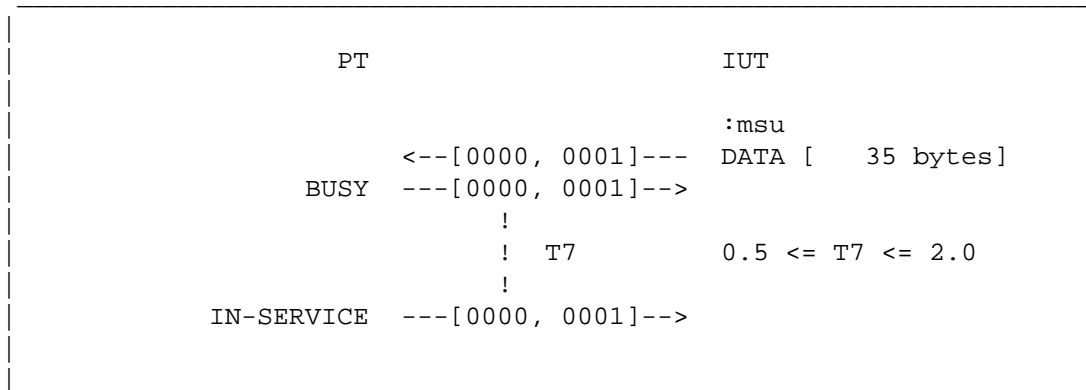


Figure 3.10.2-1. Timer T7

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Send an MSU at the IUT.
- (3) Wait for less than T7 and then acknowledge the Data message to the IUT with a status "In Service" message.
- (4) Check that the IUT sends no further status messages and remains in the "In Service" state.

### 3.10.3. Timer T6

This case validates timer T6 and procedures at the IUT. The expected sequence of events is illustrated *Figure 3.10.3-1*.

Reference: Q.781/Test 10.3

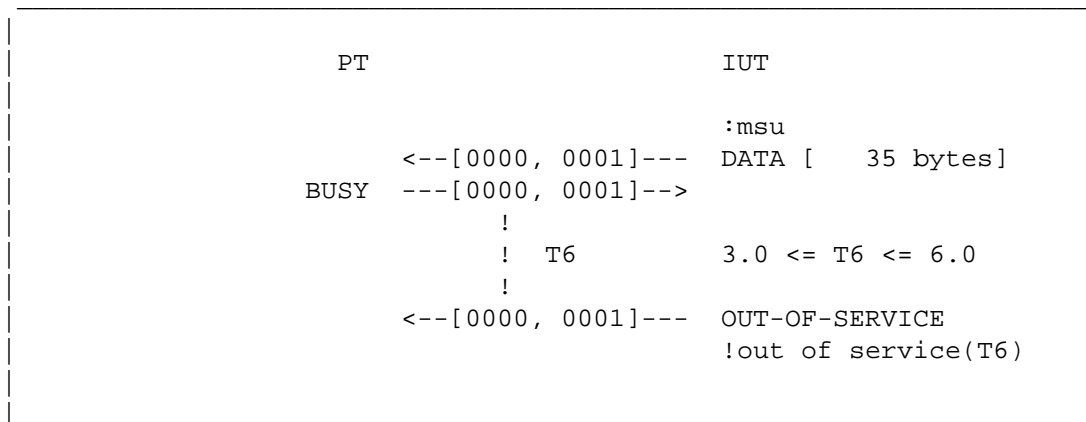


Figure 3.10.3-1. Timer T6

Test Description:

- (1) The test begins with the link in the "In Service" state.
- (2) Send an MSU at the IUT.
- (3) Send a status "Busy" messages to the IUT.
- (4) Check that the IUT sends a status "Out of Service" message and indicates "Out of Service" to Level 3 with reason "T6 Timeout" and remains in the "Out of Service" state.
- (5) Check that T6 is between 3.0 seconds and 6.0 seconds in duration.

### Security Considerations

There are no security considerations for this draft.

### Acknowledgments

### References

- M2PA. T. George, R. Dantu, M. Kalla, H. J. Schwarzbauer, G. Sidebottom, K. Morneault, "SS7 MTP2-User Peer-to-Peer Adaptation Layer," <draft-ietf-sigtran-m2pa-04.txt>, Internet Engineering Task Force - Signalling Transport Working Group (February 28, 2002). Work In Progress.
- Q.781. ITU, "Signalling System No. 7 - MTP Level 2 Test Specification," ITU-T Recommendation Q.781, ITU-T Telecommunication Standardization Sector of ITU, Geneva (March 1993). (Previously "CCITT Recommendation")

### Author's Addresses

Brian F. G. Bidulock  
OpenSS7 Corporation  
4701 Preston Park Boulevard, Suite 424  
Plano, TX 75093  
USA

Tel: +1-972-839-4489  
EMail: bidulock@openss7.org

This Internet Draft expires October 2002.

## List of Illustrations

Figure 2.1-1 Test Configuration 1 .....	2
Figure 2.1-2 Test Configuration 2 .....	2
Figure 3.1.1-1 Initialization (Power-up) .....	3
Figure 3.1.1-2 Initialization (Power-up) .....	3
Figure 3.1.2-1 Timer T2 .....	4
Figure 3.1.3-1 Timer T3 .....	4
Figure 3.1.4-1 Timer T1 & Timer T4 (Normal) .....	5
Figure 3.1.5-1 Normal alignment procedure .....	6
Figure 3.1.5-2 Normal alignment procedure .....	6
Figure 3.1.6-1 Normal alignment procedure (Data) .....	7
Figure 3.1.7-1 "Alignment" during normal proving .....	8
Figure 3.1.8-1 Normal alignment with PO set .....	8
Figure 3.1.8-2 Normal alignment with PO set .....	9
Figure 3.1.9-1 Normal alignment with PO set (Data) .....	10
Figure 3.1.9-2 Normal alignment with PO set (Data) .....	10
Figure 3.1.10-1 Normal alignment with PO set and cleared .....	11
Figure 3.1.11-1 Set RPO when "Aligned Not Ready" .....	12
Figure 3.1.12-1 "Out of Service" when "Aligned not ready" .....	13
Figure 3.1.12-2 "Out of Service" when "Aligned not ready" .....	14
Figure 3.1.13-1 "Alignment" when "Aligned not ready" .....	14
Figure 3.1.14-1 Set and clear LPO when "Initial Alignment" .....	15
Figure 3.1.15-1 Set and clear LPO when "Aligned ready" .....	16
Figure 3.1.16-1 Timer T1 in "Aligned not ready" state .....	17
Figure 3.1.17-1 No "Alignment" during normal proving period .....	17
Figure 3.1.18-1 Toggle emergency before "start alignment" .....	18
Figure 3.1.19-1 Set emergency in "not aligned" state .....	19
Figure 3.1.20-1 Set emergency when "aligned" .....	20
Figure 3.1.21-1 Both ends set emergency .....	21
Figure 3.1.22-1 Individual end sets emergency .....	22
Figure 3.1.23-1 Set emergency during normal proving .....	22
Figure 3.1.24-1 No "Alignment" during emergency alignment .....	23
Figure 3.1.25-1 Deactivate during initial alignment .....	24
Figure 3.1.26-1 Deactivate during aligned state .....	24
Figure 3.1.27-1 Deactivate during aligned not ready .....	25
Figure 3.1.28-1 "Alignment" during link in service .....	25
Figure 3.1.29-1 "Out of service" during link in service .....	26
Figure 3.1.29-2 "Out of service" during link in service .....	26
Figure 3.1.30-1 Deactivation during LPO .....	27
Figure 3.1.30-2 Deactivation during LPO .....	27
Figure 3.1.31-1 Deactivation during RPO .....	28
Figure 3.1.31-2 Deactivation during RPO .....	28
Figure 3.1.32-1 Deactivation during the proving period .....	29
Figure 3.1.32-2 Deactivation during the proving period .....	29
Figure 3.1.33-1 "Alignment" instead of "In Service" .....	30
Figure 3.1.34-1 "Out of Service" instead of "In Service" .....	31
Figure 3.1.35-1 "Processor Outage" instead of "In Service" .....	31

Figure 3.2.1-1 Unexpected events in the "Out of Service" State ..... 32

Figure 3.2.2-1 Unexpected events while "not aligned" ..... 33

Figure 3.2.3-1 Unexpected events while "aligned" ..... 34

Figure 3.2.4-1 Unexpected events while "proving" ..... 35

Figure 3.2.5-1 Unexpected events while "aligned ready" ..... 36

Figure 3.2.6-1 Unexpected events while "aligned not ready" ..... 37

Figure 3.2.7-1 Unexpected events while "in service" ..... 38

Figure 3.2.8-1 Unexpected events while "processor outage" ..... 38

Figure 3.3.1-1 Link aligned ready (Abort) ..... 39

Figure 3.3.2-1 Link aligned ready (Invalid Acks) ..... 40

Figure 3.3.3-1 Link aligned not ready (Abort) ..... 40

Figure 3.3.4-1 Link aligned not ready (Invalid Acks) ..... 41

Figure 3.3.5-1 Link in service (Abort) ..... 41

Figure 3.3.6-1 Link in service (Invalid Acks) ..... 42

Figure 3.3.7-1 Link in processor outage (Abort) ..... 42

Figure 3.3.8-1 Link in processor outage (Invalid Acks) ..... 43

Figure 3.4.1-1 Set and clear LPO while link in service ..... 43

Figure 3.4.2-1 RPO during LPO ..... 44

Figure 3.4.3-1 Clear LPO when "Both processor outage" ..... 45

Figure 3.5.1-1 Not applicable ..... 45

Figure 3.5.2-1 Not applicable ..... 46

Figure 3.5.3-1 Below minimum signal unit length ..... 46

Figure 3.5.4-1 Not applicable ..... 46

Figure 3.5.4-2 Not applicable ..... 47

Figure 3.5.5-1 Not applicable ..... 47

Figure 3.5.5-2 Not applicable ..... 47

Figure 3.6.1-1 Not applicable ..... 48

Figure 3.6.2-1 Not applicable ..... 48

Figure 3.6.3-1 Not applicable ..... 48

Figure 3.6.4-1 Not applicable ..... 48

Figure 3.7.1-1 Not applicable ..... 49

Figure 3.7.2-1 Not applicable ..... 49

Figure 3.7.3-1 Not applicable ..... 49

Figure 3.7.4-1 Not applicable ..... 50

Figure 3.8.1-1 Data transmission and reception ..... 50

Figure 3.8.2-1 Not Applicable ..... 51

Figure 3.8.3-1 Check RTB full ..... 51

Figure 3.8.4-1 Single invalid Ack ..... 52

Figure 3.8.5-1 Duplicated FSN ..... 52

Figure 3.8.6-1 Not Applicable ..... 53

Figure 3.8.7-1 Not Applicable ..... 53

Figure 3.8.8-1 Not Applicable ..... 53

Figure 3.8.9-1 In service prior to RPO being set ..... 54

Figure 3.8.10-1 Abnormal BSN - single Data message ..... 54

Figure 3.8.11-1 Abnormal BSN - two consecutive messages ..... 55

Figure 3.8.12-1 Excessive delay of acknowledgments ..... 55

Figure 3.8.13-1 Level 3 Stop command ..... 56

Figure 3.9.1-1 Not Applicable ..... 56

Figure 3.9.2-1 Not Applicable ..... 56



Figure 3.9.3-1 Not Applicable ..... 57

Figure 3.9.4-1 Not Applicable ..... 57

Figure 3.9.5-1 Not Applicable ..... 57

Figure 3.9.6-1 Not Applicable ..... 58

Figure 3.9.7-1 Not Applicable ..... 58

Figure 3.9.8-1 Not Applicable ..... 58

Figure 3.9.9-1 Not Applicable ..... 58

Figure 3.9.10-1 Not Applicable ..... 59

Figure 3.9.11-1 Not Applicable ..... 59

Figure 3.9.12-1 Not Applicable ..... 59

Figure 3.9.13-1 Not Applicable ..... 60

Figure 3.10.1-1 Congestion abatement ..... 60

Figure 3.10.2-1 Timer T7 ..... 61

Figure 3.10.3-1 Timer T6 ..... 61

## Table of Contents

Status of this Memo .....	1
Abstract .....	1
1 Introduction .....	1
1.1 Change History .....	1
1.1.1 Changes from draft-bidulock-sigtran-m2pa-test-00 .....	1
2 Test Environment .....	2
2.1 Test Configurations .....	2
2.2 Recommended IUT Settings .....	2
2.2.1 Timer Values .....	2
2.2.2 Buffer Threshold Values .....	2
3 Tests .....	2
3.1 Link State Control - Expected signal units/orders .....	2
3.1.1 Initialization (Power-up) .....	2
3.1.1.1 Forward Direction .....	3
3.1.1.2 Reverse Direction .....	3
3.1.2 Timer T2 .....	3
3.1.3 Timer T3 .....	4
3.1.4 Timer T1 & Timer T4 (Normal) .....	5
3.1.5 Normal alignment procedure .....	5
3.1.5.1 Forward Direction .....	6
3.1.5.2 Reverse Direction .....	6
3.1.6 Normal alignment procedure - correct procedure (Data) .....	7
3.1.7 Status "Alignment" received during normal proving period .....	7
3.1.8 Normal alignment with PO set .....	8
3.1.8.1 Forward Direction .....	8
3.1.8.2 Reverse Direction .....	9
3.1.9 Normal alignment with PO set (Data) .....	9
3.1.9.1 Forward Direction .....	9
3.1.9.2 Reverse Direction .....	10
3.1.10 Normal alignment with PO set and cleared .....	11
3.1.11 Set RPO when "Aligned not ready" .....	11
3.1.12 Status "Out of Service" received when "Aligned not ready" .....	12
3.1.12.1 Forward Direction .....	12
3.1.12.2 Reverse Direction .....	13
3.1.13 Status "Alignment" received when "Aligned not ready" .....	14
3.1.14 Set and clear LPO when "Initial alignment" .....	15
3.1.15 Set and clear LPO when "Aligned ready" .....	15
3.1.16 Timer T1 in "Aligned not ready" state .....	16
3.1.17 No status "Alignment" sent during normal proving period .....	17
3.1.18 Set and cease emergency prior to "start alignment" .....	18
3.1.19 Set emergency while in "not aligned" state .....	18
3.1.20 Set emergency when "aligned" .....	19
3.1.21 Both ends set emergency. ....	20
3.1.22 Individual end sets emergency .....	21
3.1.23 Set emergency during normal proving .....	22
3.1.24 No status "Alignment" sent during emergency alignment .....	23

3.1.25 Deactivation during initial alignment .....	23
3.1.26 Deactivation during aligned state .....	24
3.1.27 Deactivation during aligned not ready .....	24
3.1.28 Status "alignment" received during link in service .....	25
3.1.29 Status "out of service" received during link in service .....	25
3.1.29.1 Forward Direction .....	26
3.1.29.2 Reverse Direction .....	26
3.1.30 Deactivation during LPO .....	26
3.1.30.1 Forward Direction .....	26
3.1.30.2 Reverse Direction .....	27
3.1.31 Deactivation during RPO .....	27
3.1.31.1 Forward Direction .....	27
3.1.31.2 Reverse Direction .....	28
3.1.32 Deactivation during the proving period .....	28
3.1.32.1 Forward Direction .....	28
3.1.32.2 Reverse Direction .....	29
3.1.33 Status "Alignment" received instead of status "Ready" .....	30
3.1.34 Status "Out of Service" received instead of status "Ready" .....	30
3.1.35 Status "Processor Outage" received instead of status "Ready" .....	31
3.2 Link State Control - Unexpected signal units/orders .....	32
3.2.1 Unexpected signal units/orders in "Out of service" state .....	32
3.2.2 Unexpected signal units/orders in "Not Aligned" state .....	33
3.2.3 Unexpected signal units/orders in "Aligned" state .....	34
3.2.4 Unexpected signal units/orders in "Proving" state .....	35
3.2.5 Unexpected signal units/orders in "Aligned Ready" state .....	36
3.2.6 Unexpected signal units/orders in "Aligned Not Ready" state .....	37
3.2.7 Unexpected signal units/orders in "In Service" state .....	37
3.2.8 Unexpected signal units/orders in "Processor Outage" state .....	38
3.3 Transmission Failure .....	39
3.3.1 Link aligned ready (Abort) .....	39
3.3.2 Link aligned ready (Invalid Acks) .....	40
3.3.3 Link aligned not ready (Abort) .....	40
3.3.4 Link aligned not ready (Invalid Acks) .....	41
3.3.5 Link in service (Abort) .....	41
3.3.6 Link in service (Invalid Acks) .....	42
3.3.7 Link in processor outage (Abort) .....	42
3.3.8 Link in processor outage (Invalid Acks) .....	42
3.4 Processor Outage Control .....	43
3.4.1 Set and clear LPO while link in service .....	43
3.4.2 RPO during LPO .....	44
3.4.3 Clear LPO when "Both processor outage" .....	44
3.5 SU delimitation, alignment, error detection and correction .....	45
3.5.1 More than 7 ones between MSU opening and closing flags .....	45
3.5.2 Greater than maximum signal unit length .....	46
3.5.3 Below minimum signal unit length .....	46
3.5.4 Reception of single and multiple flags between FISUs .....	46
3.5.5 Reception of single and multiple flags between MSUs .....	47
3.6 SUERM check .....	47
3.6.1 Error rate of 1 in 256 - Link remains in service .....	47

3.6.2 Error rate of 1 in 254 - Link out of service .....	48
3.6.3 Consecutive corrupt SUs .....	48
3.6.4 Time controlled break of the link .....	48
3.7 AERM check .....	49
3.7.1 Error rate below the normal threshold .....	49
3.7.2 Error rate at the normal threshold .....	49
3.7.3 Error rate above the normal threshold .....	49
3.7.4 Error rate at the emergency threshold .....	49
3.8 Transmission and reception control (Basic) .....	50
3.8.1 Data transmission and reception .....	50
3.8.2 Negative acknowledgments of an MSU .....	50
3.8.3 Check RTB full .....	51
3.8.4 Single invalid Ack .....	52
3.8.5 Duplicated FSN .....	52
3.8.6 Erroneous retransmission - Single MSU .....	53
3.8.7 Erroneous retransmission - Multiple FISUs .....	53
3.8.8 Single FISU with corrupt FIB .....	53
3.8.9 In Service prior to RPO being set .....	54
3.8.10 Abnormal BSN - single Data message .....	54
3.8.11 Abnormal BSN - two consecutive messages .....	55
3.8.12 Excessive delay of acknowledgments .....	55
3.8.13 Level 3 Stop command .....	56
3.9 Transmission and Reception Control (PCR) .....	56
3.9.1 MSU transmission and reception .....	56
3.9.2 Priority control .....	56
3.9.3 Forced retransmission with the value N1 .....	57
3.9.4 Forced retransmission with the value N2 .....	57
3.9.5 Forced retransmission cancel .....	57
3.9.6 Reception of forced retransmission .....	57
3.9.7 MSU transmission while RPO set .....	58
3.9.8 Abnormal BSN - Single MSU .....	58
3.9.9 Abnormal BSN - Two MSUs .....	58
3.9.10 Unexpected FSN .....	59
3.9.11 Excessive delay of acknowledgments .....	59
3.9.12 FISU with FSN expected for MSU .....	59
3.9.13 Level 3 Stop command .....	59
3.10 Congestion Control .....	60
3.10.1 Congestion abatement .....	60
3.10.2 Timer T7 .....	60
3.10.3 Timer T6 .....	61
Security Considerations .....	62
Acknowledgments .....	62
References .....	62
Author's Addresses .....	62
List of Illustrations .....	63
Table of Contents .....	66

**Copyright Statement**

Copyright (C) The Internet Society (2002). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedure for copyrights defined in the Internet Standards process must be followed, or as required to translate into languages other than English.

The limited permission granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.